




Connectors > Automotive Connectors > Automotive Housings > TH/.025 CONNECTOR SYSTEM, HOUSING

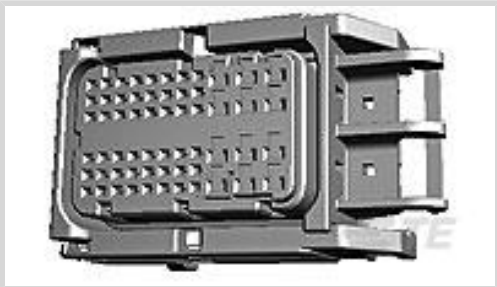

Connector System: **Wire-to-Board, Wire-to-Device**

Number of Positions: **60**

Connector & Housing Type: **Housing for Female Terminals**

Centerline (Pitch): **3 mm, 4.8 mm, 5 mm [ .118 in, .189 in, .197 in ]**

Sealable: **Yes**

[All TH/.025 CONNECTOR SYSTEM, HOUSING \(178\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	Yes
Connector Shape	Rectangular
Connector System	Wire-to-Board, Wire-to-Device
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	Integrated in Housing

Configuration Features

Number of Positions	60
Number of Rows	4, 6

Electrical Characteristics

Operating Voltage	12 VDC
Nominal Voltage Architecture	12 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Black

Contact Features

Contact Size	.64mm, 2.3mm
--------------	--------------



Contact Type	Receptacle
Mating Tab Width	.64 mm, 2.3 mm[.025 in][.09 in]

Mechanical Attachment

Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	3 mm, 4.8 mm, 5 mm[.118 in][.189 in][.197 in]

Dimensions

Connector Height	41.6 mm[1.638 in]
Product Width	70.5 mm[2.778 in]
Product Length	36 mm[1.417 in]
Row-to-Row Spacing	3 mm[.118 in]

Usage Conditions

Operating Temperature (Max)	70 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C, 140 °C[158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F][284 °F]
Operating Temperature Range	-40 – 140 °C[-40 – 284 °F]

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94HB
------------------------	---------

Packaging Features

Packaging Quantity	24
--------------------	----

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance




For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts




TE Part # 1746817-1  
SEALED EFI ECU 60P PLUG WIRE COVER




TE Part # 1747142-1  
SEALED EFI ECU 60POS LEVER R




TE Part # CAT-T319-T273  
TH/.025 CONNECTOR SYSTEM, RECPT AND TAB




TE Part # 1939393-1  
0.64/2.3II SEALED CLIP




TE Part # 1747139-1  
SEALED EFI ECU 126POS LEVER R



TE Part # 1827114-1  
WIRE COVER 60P TYPE-II



TE Part # 1612288-1  
SEALED 0.64/2.3II 60POS LEVER



TE Part # 1981831-1  
WIRECOVER 126P TYPE VI 0.64/2.3II SEALED



Also in the Series

0.64/025 Connector System

Automotive Connector Caps & Covers (5)	Automotive Connector Locks & Position Assurance(1)	Automotive Housings(127)	Automotive Terminals(16)
Connector Seals & Cavity Plugs(1)	Other Automotive Connector Accessories(4)	PCB Headers & Receptacles(158)	

Customers Also Bought

TE Part #1747142-1 SEALED EFI ECU 60POS LEVER R	TE Part #178004-1 FF 250 PLUG HSG 4P NYLON NAT	TE Part #172320-1 POSITIVE LOCK 250 (6.3 MM) HOUSING	TE Part #353027-1 040 H/D-3 PLUG HSG ASSY 17P
TE Part #1717112-2 TH/.025 CONNECTOR SYSTEM, HOUSING	TE Part #1612121-1 SQUIB 2POS PLUG HSG	TE Part #1674936-5 0.64 III RCPT NON SEALED TIN (S)	TE Part #1981561-2 0.50 SERIES CAVITY PLUG

Documents

Product Drawings

SEALED EFI ECU 0.64/2.3II 60POS PLUG ASS

Japanese

CAD Files

3D PDF

English



Customer View Model

[ENG\\_CVM\\_1747140-1\\_A.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_1747140-1\\_A.3d\\_stp.zip](#)

English

Customer View Model

[ENG\\_CVM\\_1747140-1\\_A.2d\\_dxf.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[CRIMPING OF SEALED 0.64 RECEPTACLE](#)

Japanese

Application Specification

Japanese

Instruction Sheets

[Instruction Sheet \(non U.S.\)](#)

English

[Instruction Sheet \(non U.S.\)](#)

Japanese