

PRODUCT NUMBER
10021507-104TRLF

PLATING
1 = 0.76µm GOLD/GXT ON
CONTACT AREA
2.0µm MIN MATTE TIN
ON TAILS

RoHS COMPATIBLE, SEE NOTE 5






PACKAGING
SEE NOTE 3

TOTAL NUMBER OF POS

1.27µm Ni MIN UNDERPLATING

NOTES:

- 1 - HOUSING MATERIAL : LCP
- 2 - TERMINAL MATERIAL : PHOSPHORE BRONZE
- 3 - PACKAGING TR = TAPE & REEL
(SEE TA845 FOR PACKAGING SPECS)
- 4 - HOLE DIMENSION TO BE : $\varnothing 1.95 \pm 0.07$
FOR NON INTERFERENCE FIT (LOCATIONAL)
APPLICATIONS
- 5 - RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - a - PLATING:
 - "LF" MEANS THE PRODUCT IS LEAD-FREE,
 - b - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO
260°C PEAK TEMPERATURE FOR 30 SECONDS
MAX IN A CONVECTION, INFRA-RED OR VAPOR
PHASE OR REFLOW OVEN.
 - c - LABELLING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - d - LEGAL STATEMENT : SEE GS-47-0004
- 6 - CUSTOMER PART NUMBER : 99304882

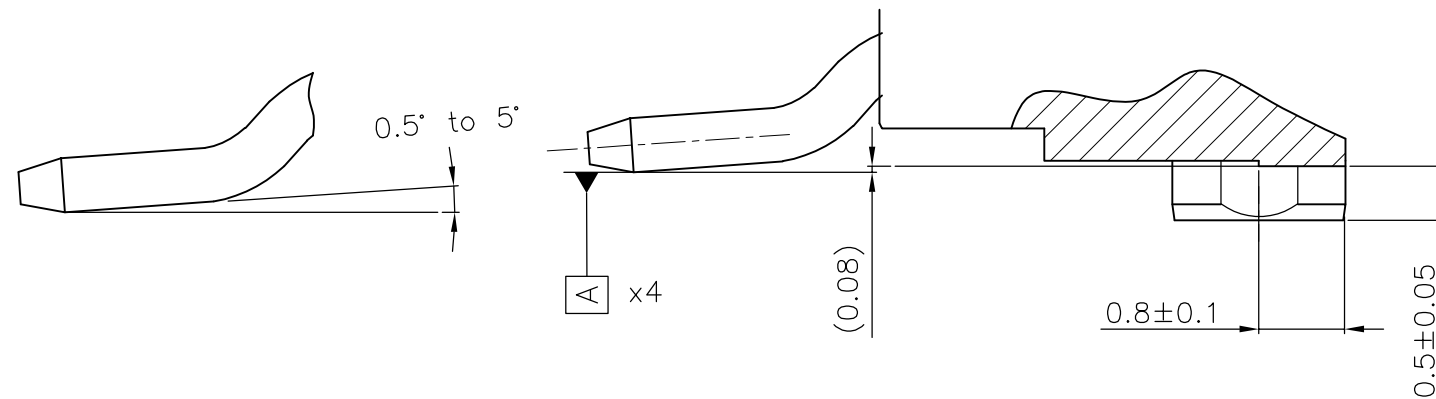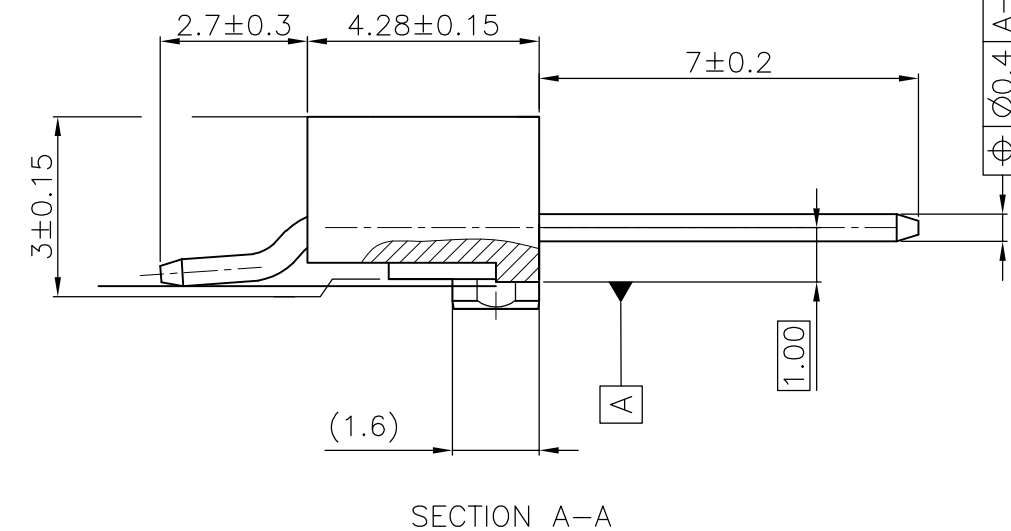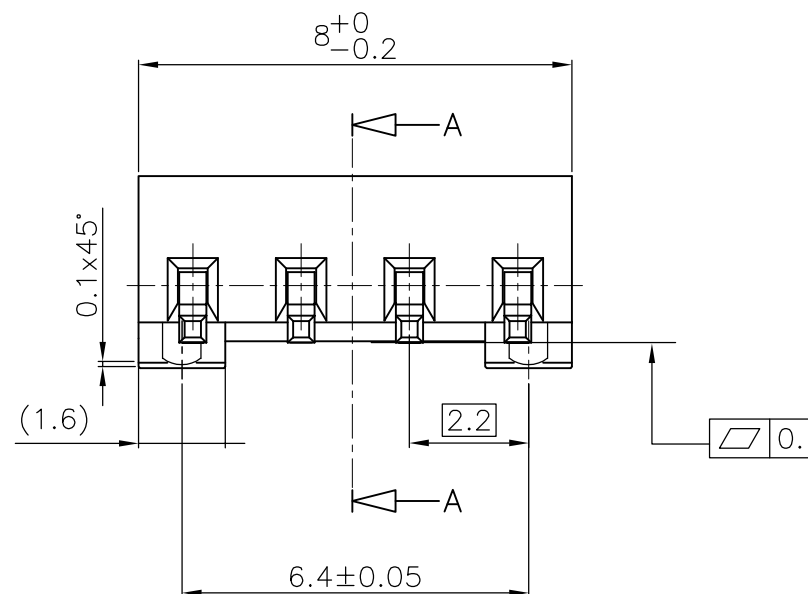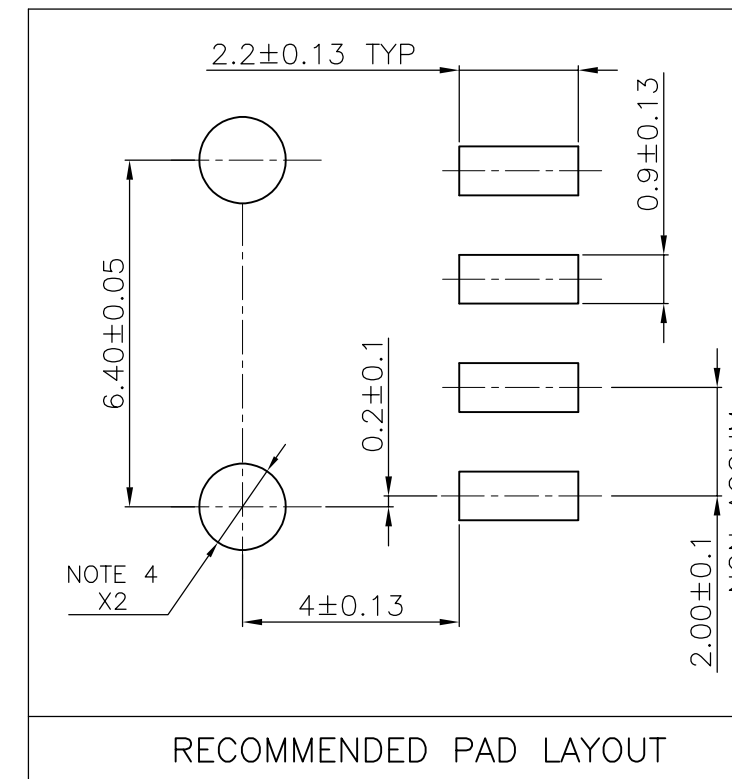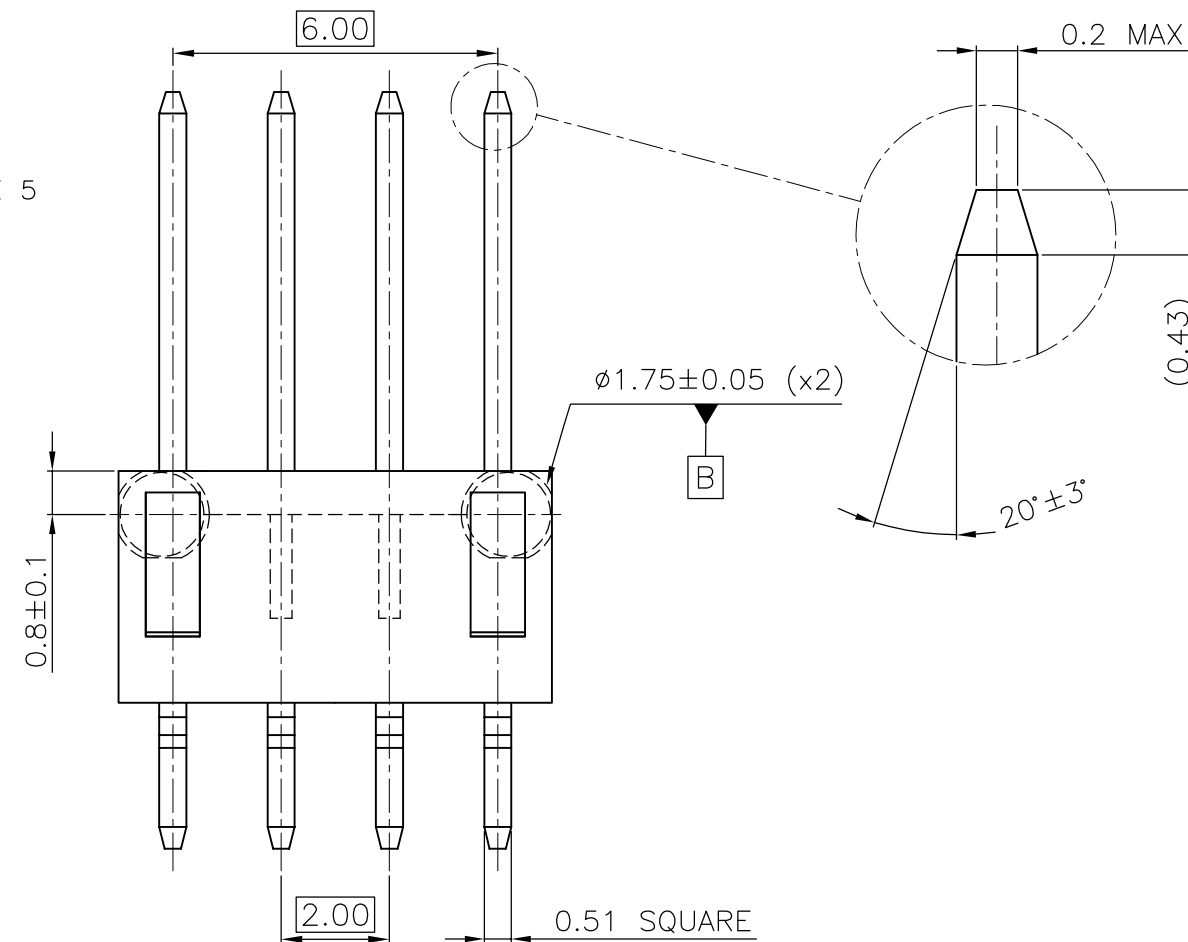

mat'l. code SEE NOTES				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection mm	product family MINITEK
ltr	ecn no	dr	date	tolerances unless	otherwise specified	mm	title
A	F05-0414	LMU	05.12.14	angles	linear	mm	UNKEYED MINITEK SI
B	F12-0031	JCO	12.03.20			mm	
C	B-16900	JCO	14.02.03			scale N/A	
D	B-19190	LMU	14.10.24	dr	L.MULIN	05.12.14	dwg no
E	F-27876	LMU	17.08.31	engr	J.COMPAGNON	05.12.14	sheet 1 of 1
F	F-28101	LMU	17.10.06	chr	---	---	10021507
				appd	JM.C	05.12.14	type
							CUSTOMER
							Draw
sheet index	revision sheet						