




Connectors > Contacts > Connector Contacts

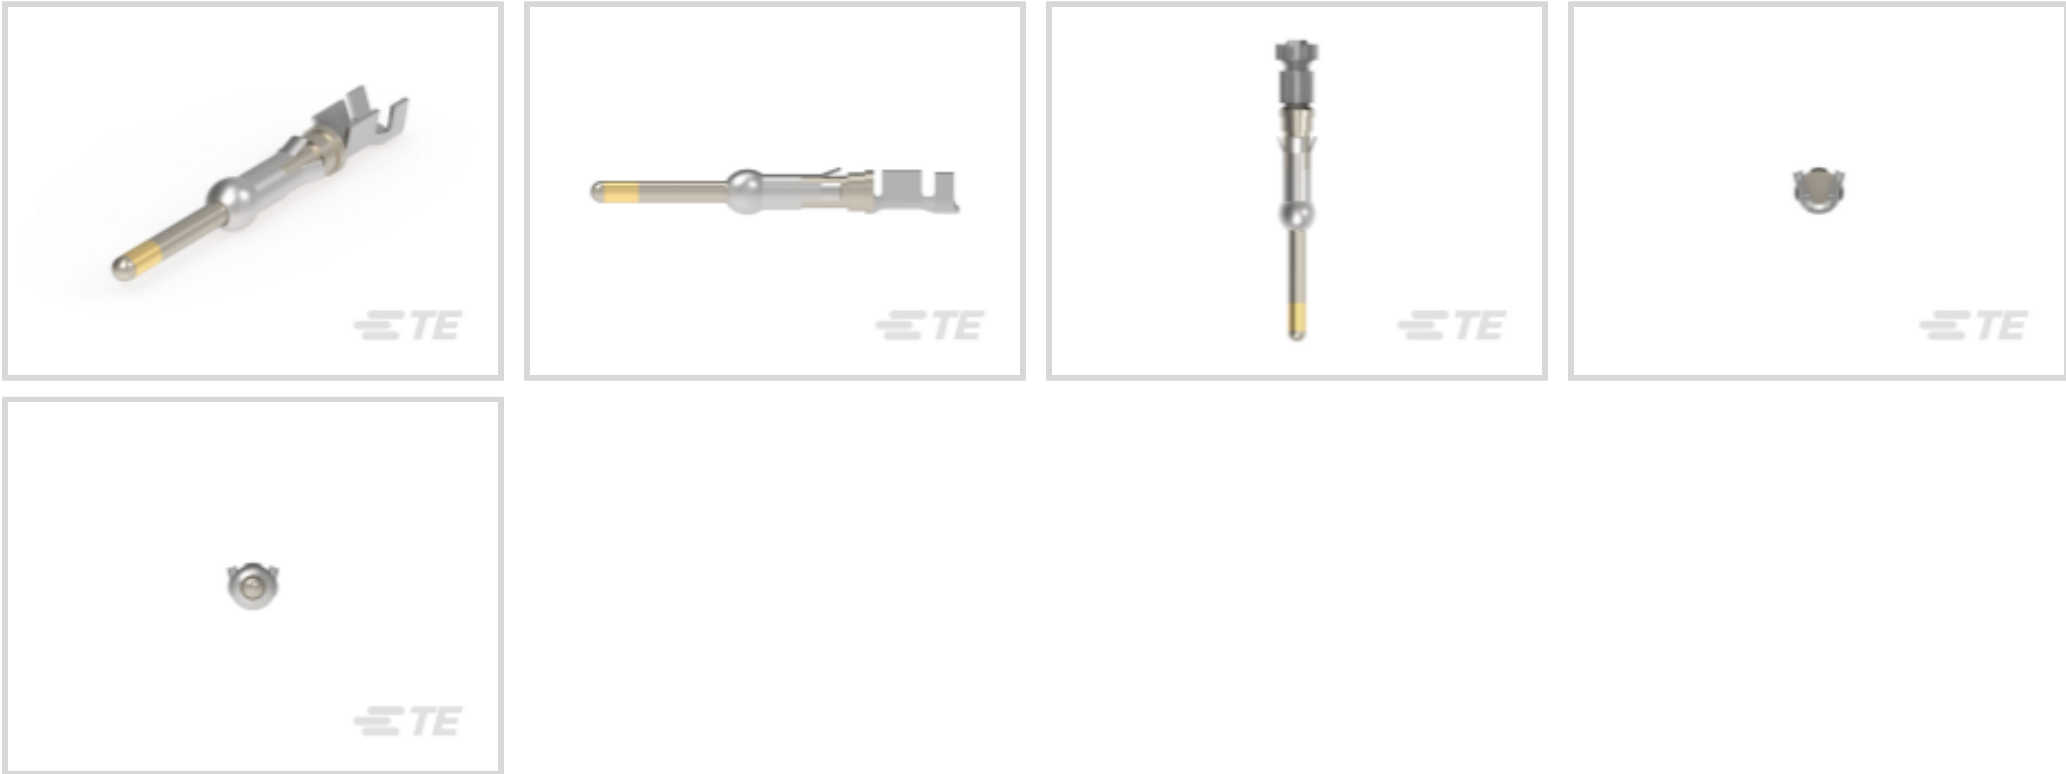

Contact Type: **Pin**
Contact Mating Area Plating Material: **Gold**
Wire Contact Termination Area Plating Material: **Tin**
Contact Retention Within Housing: **With**
Contact Retention Type Within Housing: **Snap-In**

Features

Contact Features

Mating Pin Diameter	1.57 mm[.062 in]
Contact Underplating Material Thickness	1.27 µm[50 µin]
Wire Contact Termination Area Plating Thickness	1.27 µm[50 µin]
Wire Contact Termination Area Plating Material Finish	Bright
Contact Mating Area Plating Material Thickness	.38 µm[15 µin]
Contact Shape & Form	Round
Contact Orientation	Straight
Contact Underplating Material	Nickel
Contact Type	Pin
Contact Mating Area Plating Material	Gold
Wire Contact Termination Area Plating Material	Tin
Contact Retention Within Housing	With
Contact Size	Size 16
Contact Base Material	Brass



Contact Current Rating (Max)	13 A
------------------------------	------

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With
Contact Retention Type Within Housing	Snap-In

Dimensions

Compatible Insulation Diameter Range	2.03 – 2.54 mm[.08 – .1 in]
Wire Size	.8 – 1.4 mm ²

Usage Conditions

Operating Temperature Range	-55 – 90 °C[-67 – 194 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Packaging Features

Packaging Quantity	100
Packaging Method	Box, Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 58495-2
PROCRIMPER DIE ASSY MULTIMATE



TE Part # 91505-1
CCII TYPE III+ 24-16 ASSY



TE Part # 200893-2
INSERTION TOOL CONT

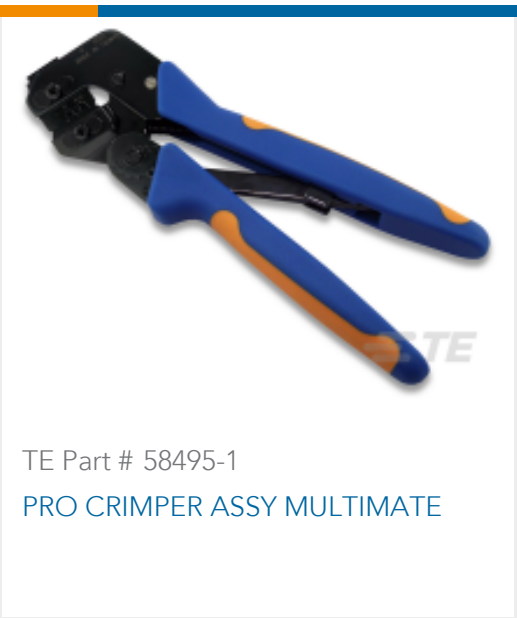

TE Part # 58495-1
PRO CRIMPER ASSY MULTIMATE



TE Part # 539972-1
EXTRACTION TOOL




TE Part # 305183
EXTRACT TOOL TYPE 2 20-16




TE Part # 169400
CERTI-LOK FRAME W/O DIES

Also in the Series | AMP Type III+

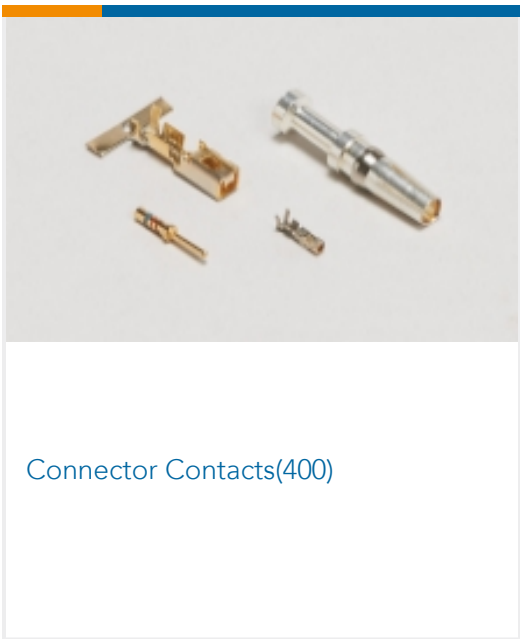

Connector Contacts(400)

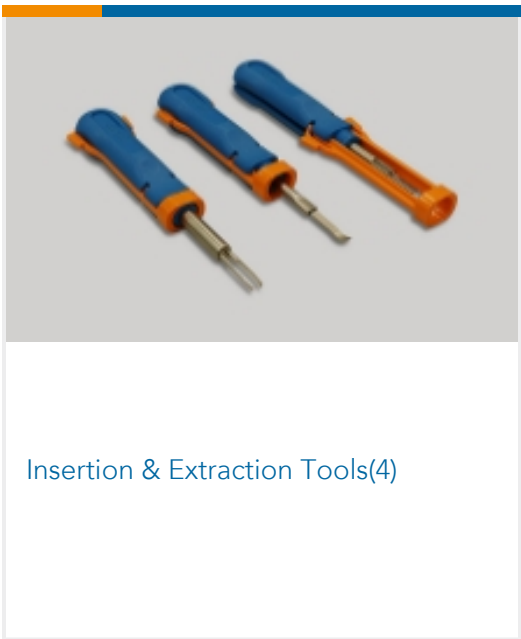

Insertion & Extraction Tools(4)

Customers Also Bought





TE Part #175287-5
DYNAMIC 3000 CONTACT



TE Part #T4030014031-000
M8.MLE.PNLREAR.3POS.STR



TE Part #T4113512041-000
M12 M, 4P GOLD D_CODE RA SHIELDED PG9



TE Part #5-103673-3
4 MTE HDR SRRA LATCH W/HLDWN



TE Part #208716-1
CMC PLUG ASSEMBLY,SZ 14



TE Part #5-103948-3
4X4 MTE SHRD PIN SR LATCH .100



TE Part #5787246-1
HDR ASY,RA,LKEY,STR TAIL,10.8V



TE Part #1927574004
ATUM-6/2-2-SP



TE Part #34112
SOLIS R 22-16COMM 22-18MIL 10

Documents

Product Drawings
III+ PIN,18-16,15AU/FL,SMPACK
English

CAD Files
Customer View Model
ENG_CVM_CVM_1-66099-3_AE.2d_dxf.zip
English
3D PDF
3D
Customer View Model
ENG_CVM_CVM_1-66099-3_AE.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_1-66099-3_AE.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications



Product Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

Japanese

Instruction Sheet (U.S.)

English