
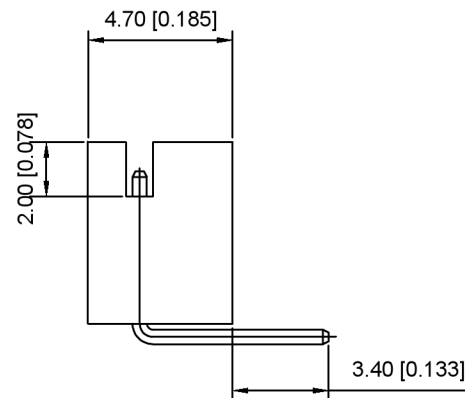
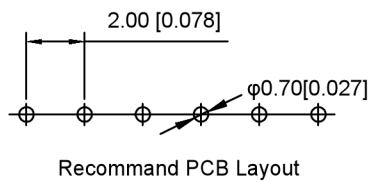
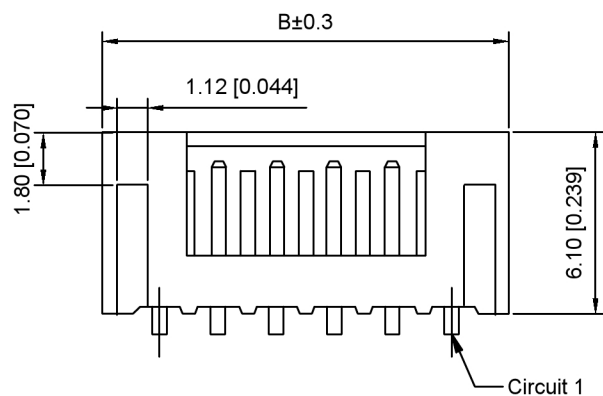


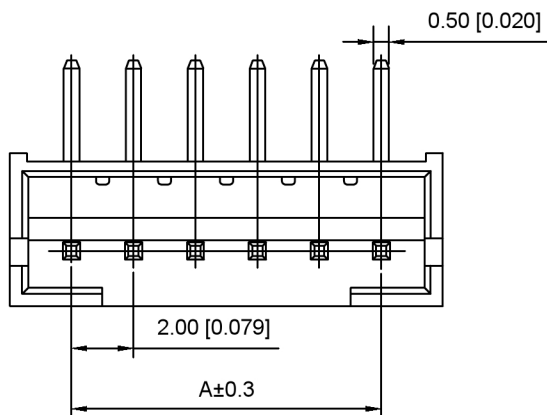

Specifications :

- Voltage rating: 100 V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000M \Omega$
- Contact resistance: $\leq 10m\Omega$
- After environmental testing : $\leq 20m\Omega$

X2016 W R-XX - XX SN

① ② ③ ④ ⑤ ⑥

- ① Series No.
② Category : W-WAFER
③ Wedding Board Angle : R-Stright 90°
④ Row No.-Pin No.: XX-02P~20P
⑤ Material : N0-PA66; 46-PA46 94V-0
⑥ Plating Category: Sn-Bright Tin Plating;V01-Gold Flash

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.00	6.00	12	22.00	26.00
03	4.00	8.00	13	24.00	28.00
04	6.00	10.00	14	26.00	30.00
05	8.00	12.00	15	28.00	32.00
06	10.00	14.00	16	30.00	34.00
07	12.00	16.00	17	32.00	36.00
08	14.00	18.00	18	34.00	38.00
09	16.00	20.00	19	36.00	40.00
10	18.00	22.00	20	38.00	42.00
11	20.00	24.00			

X2016WR-XX-46SN	PA46 UL 94V-0	Brass	Tin-Plated	X2016H
X2016WR-XX-N0SN	Nylon 66 UL 94V-0			
PART NO	Material	Material(pin)	Finish(pin)	Suitable XKB Housing

DSND		DATE		SCALE: N/A	MODEL TYPE: 2.0mm Crimp Style Connectors		
DWN		DATE		VIEW: 	PART NO.: X2016WR-XX-46SN		
CHKD		DATE		UNIT: mm/in	DWG NO.: X-X2016WR-XX-46SN		
APPD		DATE		SIZE: A4			
XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT	SHEET	REVISION
						1/1	A0

广东星坤科技股份有限公司			
Δ*		日期	
Δ*		日期	
Δ*		日期	
MARK	DESCRIPTION	DATE	REVISED
文件工程章		UNSPECIFIED TOLERANCES	
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn			