




HEAT SHRINK TUBING

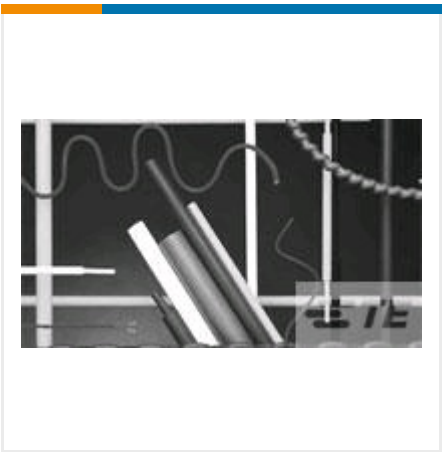

✓ Active

TE CONNECTIVITY (TE)
CGPT-6/2-X-SP
Raychem | CGPT

CGPT-6/2-X-SP
TE Internal Number: 0651914001
Alias ID: 1-1190492-3

EU RoHS Compliant
EU ELV Compliant

Wall Type Single
Resistant To Fluids, Mechanical Damage, Strain
Low Outgassing No
Product Source Czech Republic
Packaging Method Spool

DOCUMENTATION

Catalog Pages/Data Sheets

CGPT Pages From 9-1773447-9
PDF
English

At-Application-Tooling-For-Raychem-Heat-Shrink-Product-2-1773452-8
PDF
English

Product Specifications
Product Specification

CGPT Sleeving
PDF
English

FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Product Type Features

Wall Type Single
Product Family CGPT

Electrical Characteristics

Voltage (Max) (kV) .6

Body Features

Shrink Ratio 3:1
Color Clear
Flexibility Flexible
Material Irradiated Modified Polyolefin
Fluid Type Gasoline, Hydraulic Fluid, Lubricating Oil

Dimensions

Expanded Inside Diameter (Min) 6 mm [.236 in]
Recovered Wall Thickness (Nominal) .65 mm [.026 in]
Recovered Inside Diameter (Max) 2 mm [.079 in]
Recovered Wall Thickness (Tolerance) .12 mm [.005 in]

Usage Conditions

Shrink Temperature (Min) (°C) 80
Resistant To Fluids, Mechanical Damage, Strain
Recovery Temperature (°C) 120
Operating Temperature Range (°C) -40 – 135
Flammability Non-Flame-Retardant
Fluid Resistance Splash Protection

Product Availability

Applicable Region Asia, EMEA

Packaging Features

Packaging Method Spool

Other

Low Outgassing No
Product Source Czech Republic

PRODUCT COMPLIANCE



Statement of Compliance

Statement of Compliance
PDF

