MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

ASSEMBLY– TOGGLE SWITCH

CATALOG LISTING
23AT1-T2

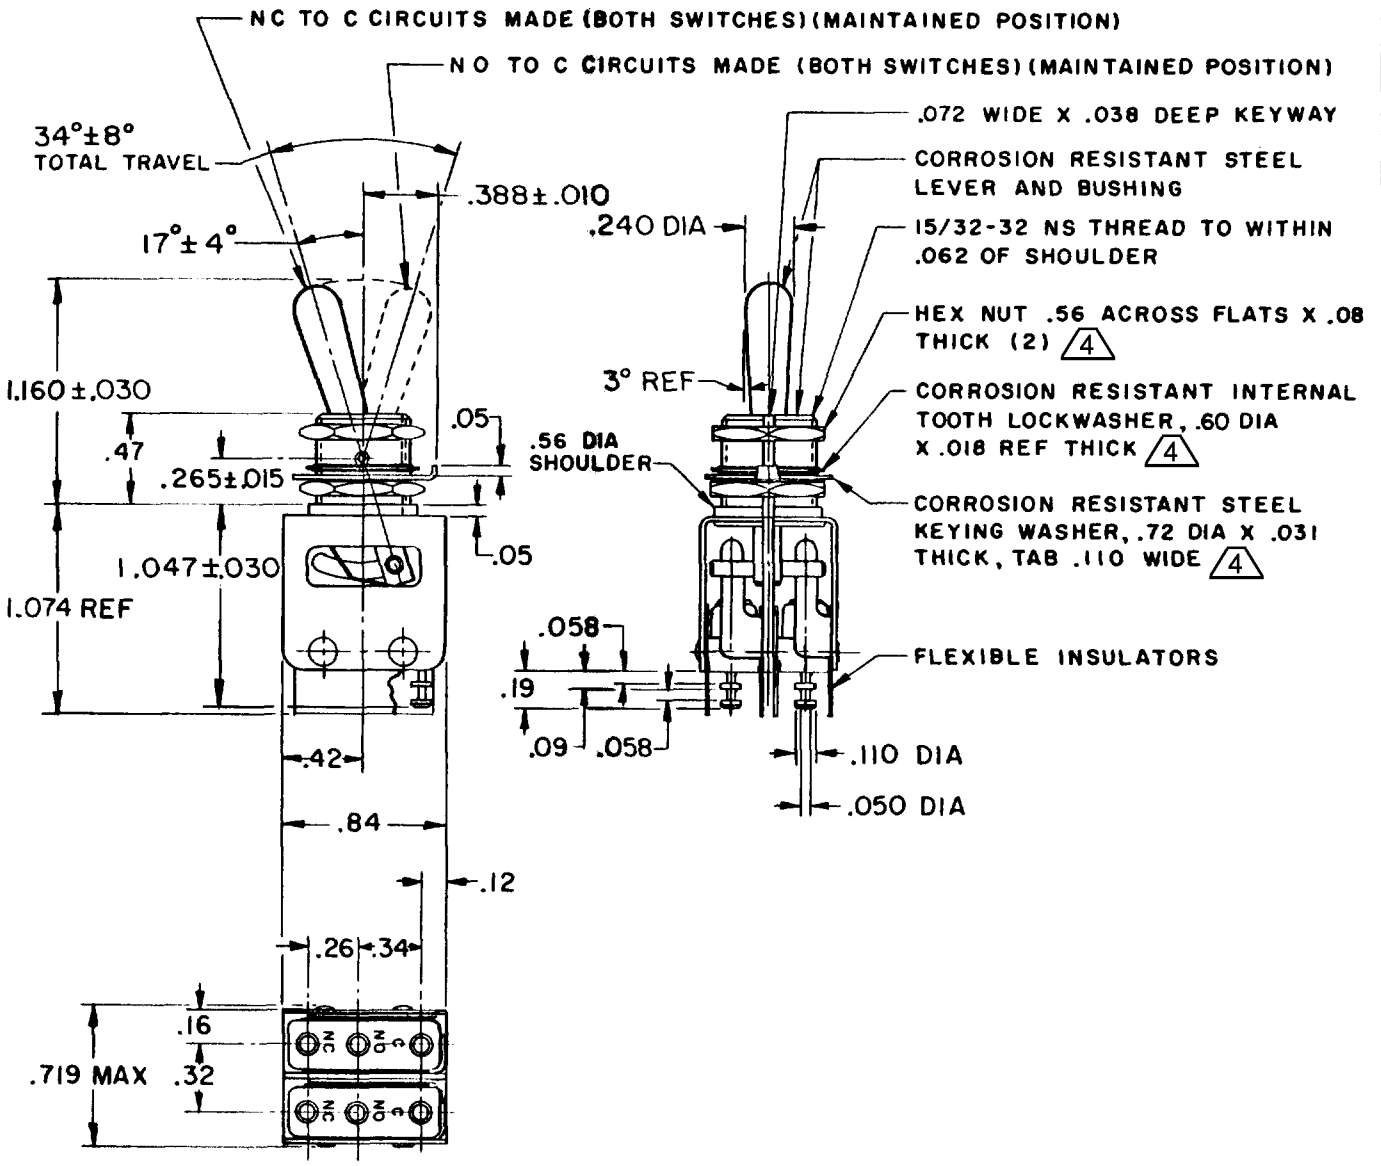

NOTES
1 - UNIT INCLUDES 1SM1 TYPE BASIC SWITCH (2)
2 - TERMINALS ARE PLATED FOR SOLDERING
3 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
4 - HARDWARE FURNISHED ASSEMBLED WITH SWITCH OR IN PACKET PER MIL-PRF-8805
5 - REPLACEMENT MOUNTING HARDWARE PACKET 15PA312-AT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (2)

250 VAC		5 AMP
30 VOLTS DC RATING		
INDUCTIVE	SEA LEVEL	3 AMP
	50,000 FT	2.5 AMP
RESISTIVE	SEA LEVEL	5 AMP
	50,000 FT	5 AMP
MAXIMUM INRUSH		24 AMP

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .06 LB

CATALOG LISTING 23AT1-T2
PAGE 1 OF 1
ISSUE M 7
REPLACES
RELEASE NO.
CHECK

REVISIONS

A	CO 19659	M B F 13 JAN 65
B	CO 50566-B	WJM 6 MAY 82
C	CO 66089	G R T 8 OCT 90
D	0000499	C S L 9 JUN 03

CHECK
CHECK
CHECK

RASTER
DRAWN M B F 13 JAN 65
FO-50378