
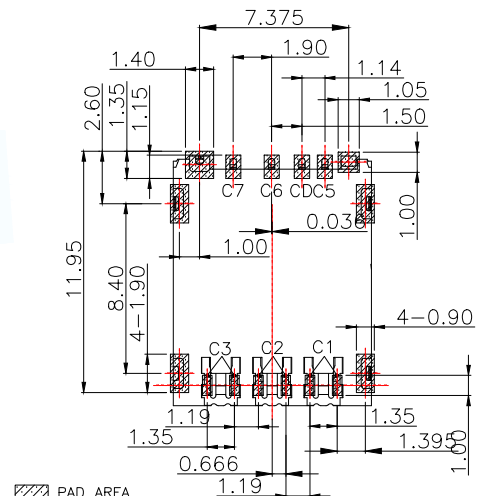
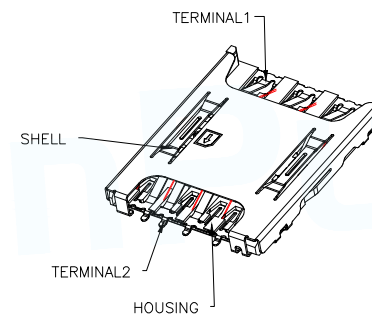
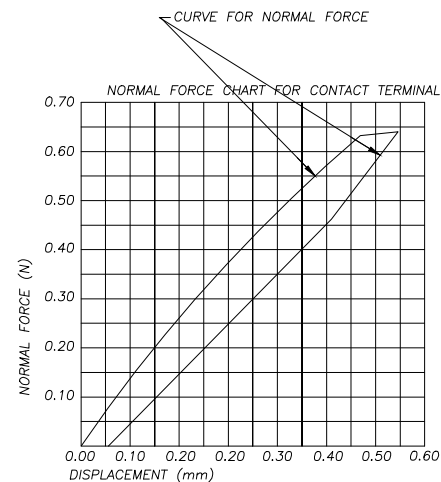
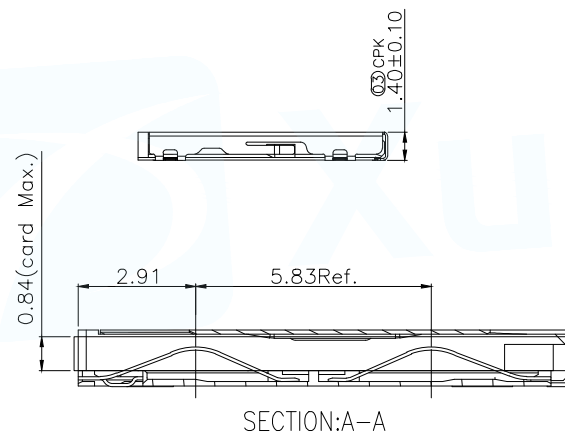
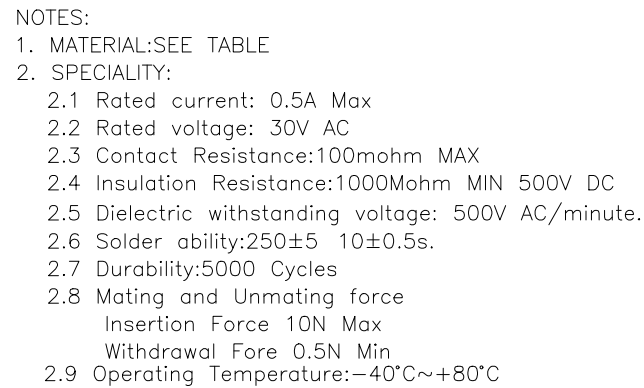


 KEEP OUT AREA

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

NANO SIM CARD	
Pin No.	NAME
C1	VCC OF SIM
C2	RST OF SIM
C3	CLK OF SIM
C5	GND OF SIM
C6	VPP OF SIM
C7	I/O OF SIM
C4/C8	N/A
CD	DETECTION SWITCH

Circuit Diagram for Detect Switch



③	TERMINAL	6	C5210-EH,T=0.12	Au PLATING
②	BASE INSULATOR	1	LCP+GF30%	BLACK
①	SHELL	1	SUS304-H,T=0.12	AU/Ni PLATING
NO.	PART NAME	Q'TY	DESCRIPTION	NOTE

MANUFACTURE DWG

UNLESS OTHERWISE
SPECIFIED TOLERANCES

ANGLES:

	$x^2 + 2^2$
--	-------------

	$X, X^*: \pm 1^\circ$
--	-----------------------



东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co,Ltd



TITLE:6+1P 1.4H PUSH PULL NANO SIM CARD CONN.
--


DWN		
-----	--	--

APVD		
------	--	--

SIZE:A4	SHEET:1F1	REV:A
---------	-----------	-------


REV:A

User Direction of Unreeling

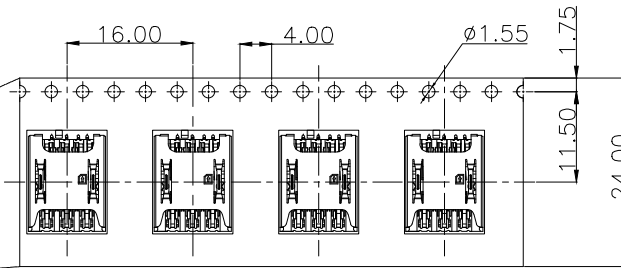

NOTES

1. NUMBER OF CONNECTORS: 1800PCS/REEL
2. LEAD TAPE LENGTH

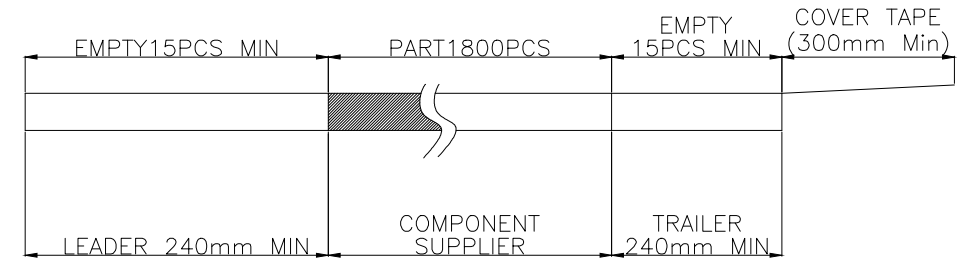

3. QUANTITY: 14400PCS/CARTON

4. WEIGHT :

3.1 NET WEIGHT : 2.4Kg


3.2 GROSS WEIGHT : 6.5Kg

COVER TAPE PEELING ANGLE: 165°~180°
PEELING FORCE: 20~130g

CARRIER TAPE

User Direction of Unreeling

DETAIL B

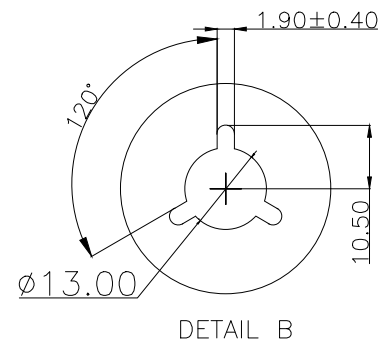4-TRIANGLE PARTITION
380*235*5 K3K

8-REEL

(2PCS) PEARL WOOL

CARTON
335*335*250 K=K

TAPE ON

LABEL

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:6+1P 1.4H PUSH PULL NANO SIM CARD CONN. 包装图	
			PAR	SMN-307-ARP7
DECIMALS:	ANGLES:		DWN	
X.:±0.50	X.:±2°		CHKD	
X.X:±0.20	X.X':±1°		APVD	
X.XX:±0.15			SCALE1:1	UNIT:MM 
CUSTOMER COPY			SIZE:A4	SHEET:1F1
			REV:A	