

1627136

https://www.phoenixcontact.com/pc/products/1627136

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



CHARX connect comfort, Mobile AC charging cable, with vehicle charging connector and infrastructure charging plug, for charging electric vehicles (EV) with alternating current (AC) via type 2 vehicle charging inlets, with protective cap, Type 2, IEC 62196-2, 32 A / 480 V (AC), housing: black, gray, PHOENIX CONTACT logo, cable: 4 m, black, spiraled

Product description

Mobile AC charging cable with vehicle charging connector and infrastructure charging plug for charging electric vehicles (EV) with alternating current (AC) via type 2 vehicle charging inlets, compatible with type 2 infrastructure charging sockets at charging stations for e-mobility (EVSE)

Your advantages

- · Complete product range
- · Convenient handling due to the ergonomic, triple award-winning design
- · Available with your logo on request for consistent branding of your charging station
- Longitudinal water tightness reliably prevents water ingress
- Developed and produced in accordance with the IATF 16949 automotive standard and ISO 9001
- Tested in accordance with automotive standards LV124, LV214, and LV215-2
- Tested in accordance with EV Ready 37 requirements
- Laser-marked mating face in accordance with DIN EN 17186

Commercial data

Item number	1627136
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	XWBAEC
Catalog page	Page 29 (C-7-2019)
GTIN	4055626299488
Weight per piece (including packing)	4,590 g
Weight per piece (excluding packing)	4,489 g
Customs tariff number	85444290
Country of origin	PL



1627136

https://www.phoenixcontact.com/pc/products/1627136

Technical data

Product properties

Product type	AC charging cable
Product family	CHARX connect comfort
Application	for charging electric vehicles (EV) with alternating current (AC) via type 2 vehicle charging inlets
	compatible with type 2 infrastructure charging sockets at charging stations for electromobility (EVSE)
Туре	Mobile AC charging cable
	with vehicle charging connector and infrastructure charging plug
Design	with protective cap
Affixed logo	PHOENIX CONTACT logo
Data management status	
Article revision	12
Charging mode	Mode 3, Case B
Charging standard	Type 2

Electrical properties

Type of signal transmission	Pulse width modulation
Note on the connection method	Crimp connection, cannot be disconnected
Coding	220 Ω (between PE and PP)
Type of charging current	AC 3-phase
Charging power	26.6 kW
Charging current	32 A

Power contact

Number	5 (L1, L2, L3, N, PE)
Rated voltage	480 V AC
Rated current	32 A

Signal contact

_	
Number	2 (CP, PP)
Rated voltage	30 V AC
Rated current	2 A

Dimensions

Infrastructura charging plug

Infrastructure charging plug Dimensional drawing	
	233,4 44.5 - 51 - 53 - 63 - 63 - 63



1627136

https://www.phoenixcontact.com/pc/products/1627136

Bending radius

	Infrastructure plug
Width	58 mm
Height	131.8 mm
Depth	233.4 mm
ehicle charging connector	
Dimensional drawing	
	215.9 70 53.4 54.4 Vehicle connector
Width	70 mm
Height	137 mm
Depth	215.9 mm
erial specifications	
Color (Housing)	black (9005)
Color (Handle area)	gray (7042)
Color (Mating face)	black (9005)
Color (Protective cap)	black (9005)
Color (Cable)	black (9005)
Material (Vehicle charging connector)	Plastic
Material (Cable outer sheath)	TPE-U
Material (Infrastructure charging plug)	Plastic
Material (Contact surface)	Silver
ole/line	
Cable length	4 m
Wiring standards/regulations	prEN 50620/DIN EN 50620
Wiring certifications	VDE
Cable type	Class 5
Cable type	spiraled
Cable structure	5 x 6.0 mm ² + 1 x 0.5 mm ²
External cable diameter	17.00 mm ±0.4 mm
Outer sheath, material	TPE-U
Block length	0.63 m ±10 %
Coil diameter	80 mm ±10 %
Effective length	max. 4 m ±5 %
Cable resistance	≤ 0.0033 Ω/m (based on a power core, at an ambient temperature of 20°C)

min. 102 mm (6x diameter)



1627136

https://www.phoenixcontact.com/pc/products/1627136

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 10000
Insertion force	< 100 N
Withdrawal force	< 100 N

Environmental and real-life conditions

Ambient conditions

Degree of protection (Vehicle charging connector)	IP44 (plugged in; when plugged in and ready to operate, the degree of protection is only ensued if both plug-in components are original products from Phoenix Contact or suitable standard-compliant products)
Degree of protection (Infrastructure charging plug)	IP44 (plugged in; when plugged in and ready to operate, the degree of protection is only ensued if both plug-in components are original products from Phoenix Contact or suitable standard-compliant products)
Degree of protection (Protective cap)	IP54
Ambient temperature (operation)	-40 °C 50 °C
Ambient temperature (storage/transport)	-40 °C 80 °C
Altitude	5000 m (above sea level)

Standards and regulations

Standards

Standards/regulations	IEC 62196-2
-----------------------	-------------




1627136

https://www.phoenixcontact.com/pc/products/1627136

Drawings

Dimensional drawing

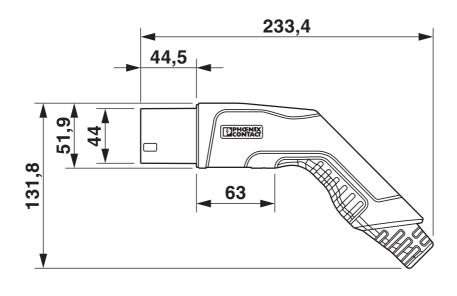




Infrastructure plug



1627136

https://www.phoenixcontact.com/pc/products/1627136

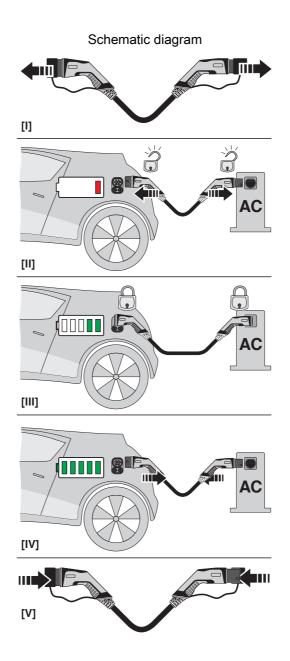


Operating instructions



1627136


https://www.phoenixcontact.com/pc/products/1627136



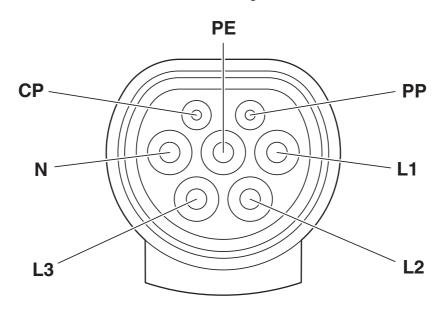

Pin assignment of the Vehicle Connector

Schematic diagram

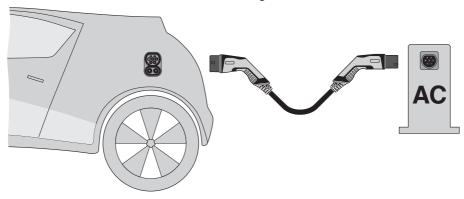


Terminology definition



1627136

https://www.phoenixcontact.com/pc/products/1627136


Dimensional drawing

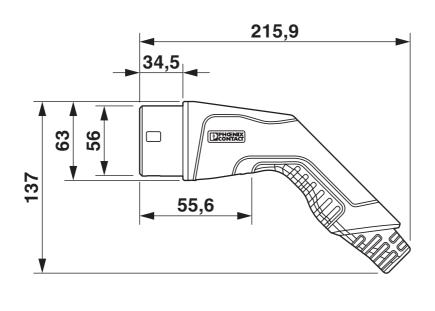



Vehicle connector

Connection diagram

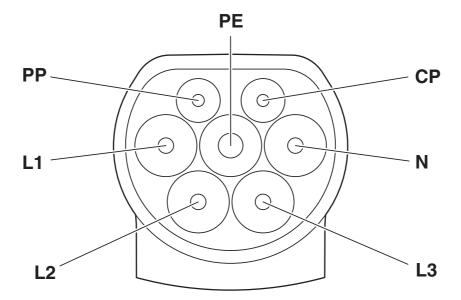

Pin assignment of Infrastructure Plug



1627136

https://www.phoenixcontact.com/pc/products/1627136

Classifications

UNSPSC 21.0

ECLASS

39121500

Sep 17, 2024, 8:37 AM Page 9 (15)



1627136

https://www.phoenixcontact.com/pc/products/1627136

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-10
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	fcfc2385-de2b-4d2d-8741-a8c7a129a0fd



1627136

https://www.phoenixcontact.com/pc/products/1627136

Accessories

EV-T2AC-PARK - Charging connector holder

1624148

https://www.phoenixcontact.com/pc/products/1624148



CHARX connect, Charging connector holder, Accessories, for vehicle charging connectors on charging stations (EVSE), Type 2, IEC 62196-2, Front mounting, housing: black, PHOENIX CONTACT logo

EV-T2M3SO12-3P-P-SET - Infrastructure charging socket

1164422

https://www.phoenixcontact.com/pc/products/1164422



CHARX connect modular, Infrastructure charging socket, square, Premium, Set, with square protective cover, with temperature sensors, with LED (common cathode connection), for charging electric vehicles (EV) with alternating current (AC), Type 2, IEC 62196-2, 32 A / 480 V (AC), without single-core wires, locking actuator: 12 V, 3-pos., Rear panel mounting, M5 thread, housing: black, PHOENIX CONTACT logo



1627136

https://www.phoenixcontact.com/pc/products/1627136

EV-T2M3SO12-4P-P-SET - Infrastructure charging socket

1164423

https://www.phoenixcontact.com/pc/products/1164423



CHARX connect modular, Infrastructure charging socket, square, Premium, Set, with square protective cover, with temperature sensors, with LED (common cathode connection), for charging electric vehicles (EV) with alternating current (AC), Type 2, IEC 62196-2, 32 A / 480 V (AC), without single-core wires, locking actuator: 12 V, 4-pos., Rear panel mounting, M5 thread, housing: black, PHOENIX CONTACT logo

EV-T2M3SO12-3P-BL-SET - Infrastructure charging socket

1268358

https://www.phoenixcontact.com/pc/products/1268358



CHARX connect modular, Infrastructure charging socket, square, Basic, Set, with square protective cover, with LED (common cathode connection), for charging electric vehicles (EV) with alternating current (AC), Type 2, IEC 62196-2, 32 A / 480 V (AC), without single-core wires, locking actuator: 12 V, 3-pos., Rear panel mounting, M5 thread, housing: black, PHOENIX CONTACT logo



1627136

https://www.phoenixcontact.com/pc/products/1627136

EV-T2M3SO12-4P-BL-SET - Infrastructure charging socket

1268355

https://www.phoenixcontact.com/pc/products/1268355



CHARX connect modular, Infrastructure charging socket, square, Basic, Set, with square protective cover, with LED (common cathode connection), for charging electric vehicles (EV) with alternating current (AC), Type 2, IEC 62196-2, 32 A / 480 V (AC), without single-core wires, locking actuator: 12 V, 4-pos., Rear panel mounting, M5 thread, housing: black, PHOENIX CONTACT logo

EV-T2M3SO12-3P-B-SET - Infrastructure charging socket

1164420

https://www.phoenixcontact.com/pc/products/1164420



CHARX connect modular, Infrastructure charging socket, square, Basic, Set, with square protective cover, for charging electric vehicles (EV) with alternating current (AC), Type 2, IEC 62196-2, 32 A / 480 V (AC), without single-core wires, locking actuator: 12 V, 3-pos., Rear panel mounting, M5 thread, housing: black, PHOENIX CONTACT logo



1627136

https://www.phoenixcontact.com/pc/products/1627136

EV-T2M3SO12-4P-B-SET - Infrastructure charging socket

1164417

https://www.phoenixcontact.com/pc/products/1164417



CHARX connect modular, Infrastructure charging socket, square, Basic, Set, with square protective cover, for charging electric vehicles (EV) with alternating current (AC), Type 2, IEC 62196-2, 32 A / 480 V (AC), without single-core wires, locking actuator: 12 V, 4-pos., Rear panel mounting, M5 thread, housing: black, PHOENIX CONTACT logo

EV-LABEL-C - Label

1309766

https://www.phoenixcontact.com/pc/products/1309766

CHARX connect, Label, Accessories, for AC type 2 vehicle charging connector and for AC type 2 vehicle charging inlet, DIN EN 17186





1627136

https://www.phoenixcontact.com/pc/products/1627136

EV-LABEL-C-SO - Label

1315521

https://www.phoenixcontact.com/pc/products/1315521

CHARX connect, Label, Accessories, for AC type 2 infrastructure charging socket and for AC type 2 infrastructure charging plug, DIN EN 17186



Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstraße 8 D-32825 Blomberg +49 (0) 5235-3 00 info@phoenixcontact.com