




Relays & Contactors > Relays > Power Relays

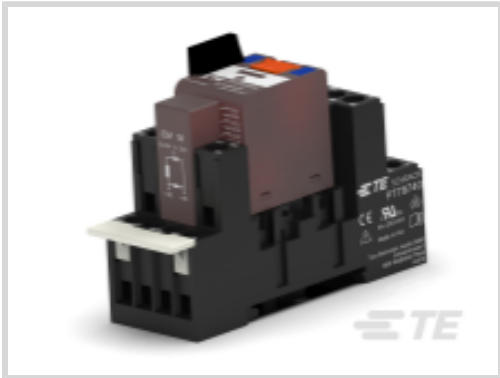

Relay Type: **General Purpose Power Relay**
Coil Magnetic System: **Monostable**
Coil Power Rating DC: **.741 W**
Coil Resistance: **777 Ω**
Coil Voltage Rating: **24 VDC**

Features

Product Type Features

Relay Type	General Purpose Power Relay
------------	-----------------------------

Configuration Features

Contact Arrangement	4 Form C 4PDT-CO
Contact Number of Poles	4

Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	1200 Vrms
Contact Limiting Making Current	12 A
Contact Limiting Short-Time Current	6 A
Contact Limiting Continuous Current	6 A
Insulation Initial Dielectric Between Adjacent Contacts	2000 Vrms
Insulation Initial Dielectric Between Contacts & Coil	2500 Vrms
Contact Limiting Breaking Current	12 A
Coil Power Rating DC	.741 W
Coil Resistance	777 Ω
Coil Voltage Rating	24 VDC
Contact Current Rating	6 A
Contact Switching Load (Min)	10mA @ 12V



Contact Switching Voltage (Max)	400 VAC
---------------------------------	---------

Contact Voltage Rating	240 VAC
------------------------	---------

Body Features

Product Weight	85 g[2.988 oz]
----------------	----------------

Contact Features

Contact Material	AgNi90/10
------------------	-----------

Termination Features

Relay Connection Type	Plug-In
-----------------------	---------

Terminal Configuration	Screw Terminals
------------------------	-----------------

Mechanical Attachment

Product Mount Type	DIN Rail
--------------------	----------

Dimensions

Insulation Clearance Between Contact & Coil	4 mm[.157 in]
---------------------------------------------	---------------

Insulation Creepage Between Contact & Coil	4 mm[.157 in]
--------------------------------------------	---------------

Product Width	27 mm[1.06 in]
---------------	----------------

Product Length	73.5 mm[2.89 in]
----------------	------------------

Product Height	58 mm[2.28 in]
----------------	----------------

Usage Conditions

Environmental Category of Protection	RTI
--------------------------------------	-----

Environmental Ambient Temperature (Max)	70 °C[158 °F]
-----------------------------------------	---------------

Operating Temperature Range	-40 – 70 °C
-----------------------------	-------------

Operation/Application

Current Type	DC
--------------	----

Indicator Type	LED
----------------	-----

Coil Magnetic System	Monostable
----------------------	------------

Packaging Features

Packaging Method	Carton
------------------	--------

Other

Environmental Ambient Temperature Class	50 – 70 °C
-----------------------------------------	------------

Coil Power Rating Class	.6 – .8 W
-------------------------	-----------

Width Class (Mechanical)	25 – 30 mm
--------------------------	------------



Contact Current Class

16 A

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1860517-5
PT170R6 Jumper Bar

Also in the Series | SCHRACK Relay Package PT



Power Relays(33)

Customers Also Bought



TE Part #6-1419102-3
T9AP1D52-24



TE Part #66506-4
HD 20 DF PIN PLTD




TE Part #4-745130-3
SHLDING FERRULE,PLTD,BULK PKG



TE Part #6862-201-16278
CONT SOC




TE Part #8-1415074-1
PT2S7LC4

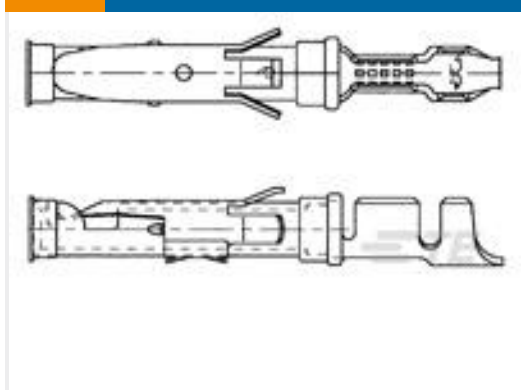


TE Part #1-163088-0
SPEC. PLATED




TE Part #1SNF546011R0000
CBS300-2P

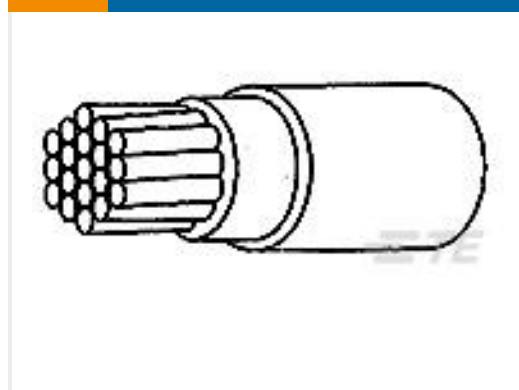

TE Part #7699133001
FLT0111-1.00-6

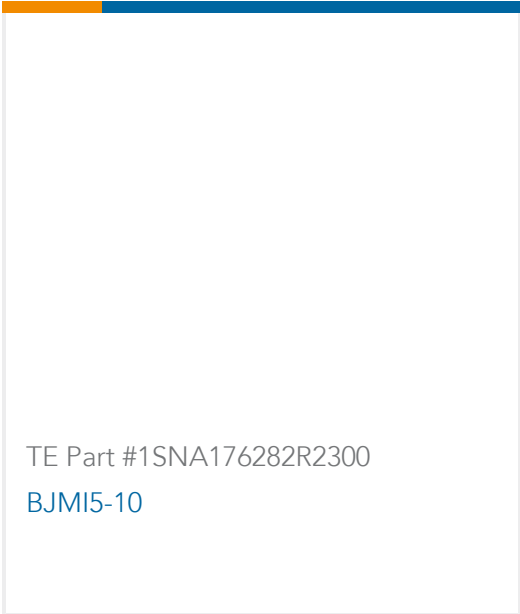

TE Part #1SNA176282R2300
BJMI5-10

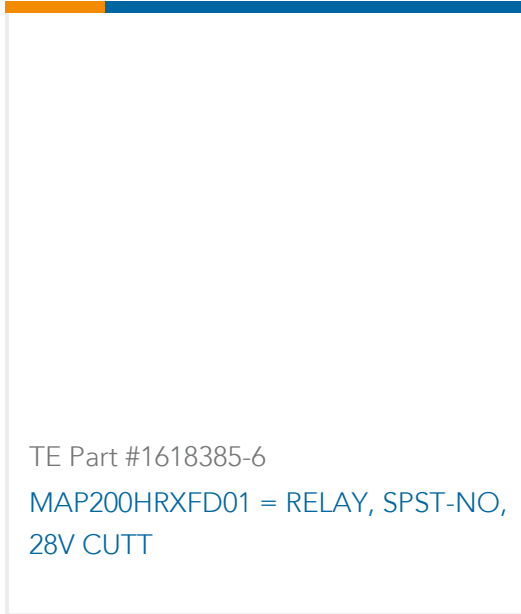

TE Part #1618385-6
MAP200HRXFD01 = RELAY, SPST-NO, 28V CUTT

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1415076-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1415076-1_A.3d_igs.zip



English

Customer View Model

[ENG_CVM_CVM_1415076-1_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Relay Package Package PT](#)

English

Product Specifications

[Definitions General Purpose Relays](#)

English

Agency Approvals

[VDE Certificate](#)

English