


This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

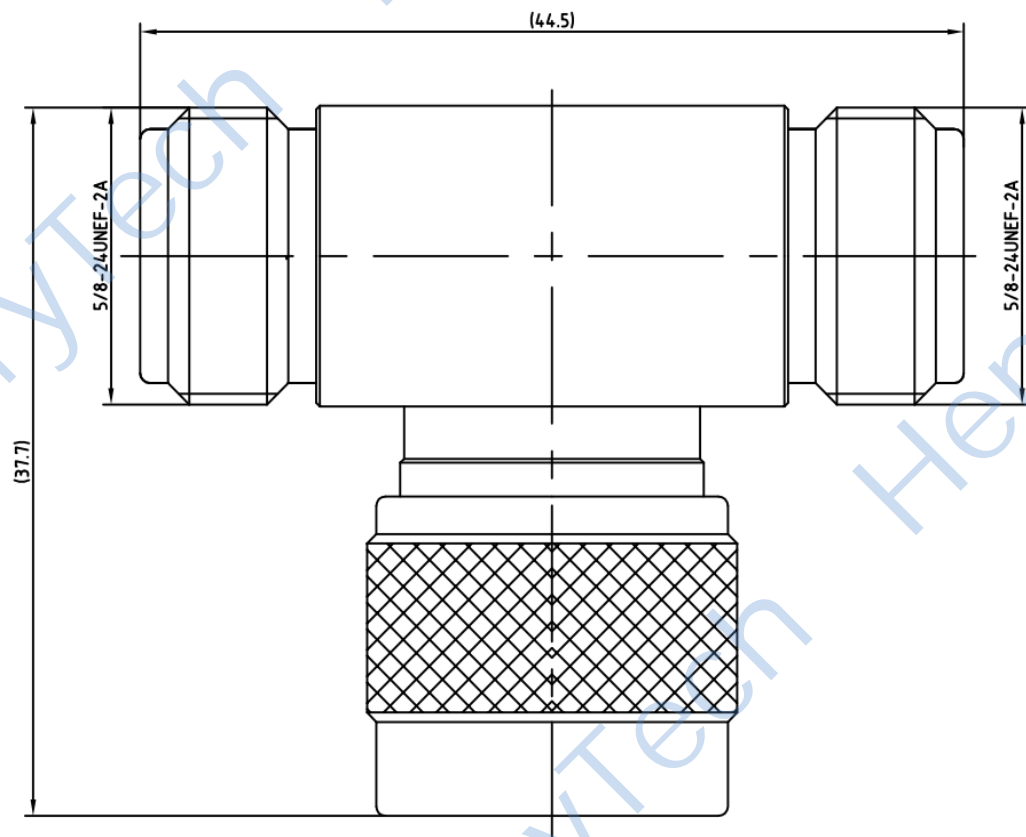

1 Electrical

- 1.1 Impedance: 50Ω
- 1.2 Frequency: 0-6GHz
- 1.3 Insulation resistance: $\geq 5000M\Omega$
- 1.4 Dielectric strength: 1500V
- 1.5 Contact resistance
 - Center contact $\leq 1M\Omega$
 - Outer contact $\leq 0.2M\Omega$

2 Material&Finish

- 2.1 Inner Contact: Phosphor bronze, gold plated
- 2. Outer Contact: Brass, Nickel plated
- 3. Insulators: PTFE

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ± 0.50
.X ± 0.20
.XX ± 0.10
ANGLES $\pm 1^\circ$

TITLE:
HL-N-KJK
N Male to Female to
Female Adaptor

PART NO: HL-N-KJK



DIMENSION IN MILLIMETERS (mm)

SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
----------	------------	------------	--------