




**Part Number :** [702463404](#)  
**Product Description :** 2.54mm Pitch C-Grid Header, Low Profile, Dual Row, Vertical, Shrouded, 34 Circuits, 0.127µm Gold (Au) Plating, Tin(Sn) PC Tail Plating  
**Series Number :** 70246  
**Status :** Active  
**Product Category :** PCB Headers and Receptacles

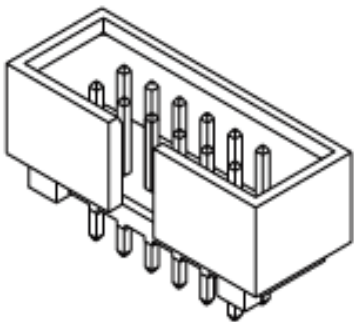

Documents & Resources


**Drawings**  
[702463404\\_sd.pdf](#)  
[PK-87835-001-001.pdf](#)

**3D Models and Design Files**  
[702463404\\_stp.zip](#)

**Specifications**  
[713080001-AS-000.pdf](#)  
[PS-70246-100-001.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Compliant with Exemption 44; 34; 33
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

## Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

## EU RoHS Certificate of Compliance

---

### Part Details

#### General

Status	Active
Category	PCB Headers and Receptacles
Series	70246
Description	2.54mm Pitch C-Grid Header, Low Profile, Dual Row, Vertical, Shrouded, 34 Circuits, 0.127µm Gold (Au) Plating, Tin(Sn) PC Tail Plating
Application	Signal, Wire-to-Board
Component Type	PCB Header
Product Family	C-Grid and C-Grid III Connector Products
Product Name	C-Grid
UPC	822348757374

#### Agency

CSA	LR19980
UL	E29179

#### Electrical

Current - Maximum per Contact	2.5A
Voltage - Maximum	250V DC

#### Physical

Breakaway	No
Circuits (Loaded)	34
Circuits (maximum)	34
First Mate / Last Break	No

Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Net Weight	3.895/g
Number of Rows	2
Orientation	Vertical
Packaging Type	Tray
PC Tail Length	3.43mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	0.127µm
Plating min - Termination	1.905µm
Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	Closed Ends
Stackable	No
Temperature Range - Operating	-55° to +120°C
Termination Interface Style	Through Hole

## Solder Process Data

Max-Duration	10
Lead-Free Process Capability	WAVE
Max-Cycle	1
Max-Temp	235

---

## Mates With / Use With

Mates with Part(s)

Description	Part Number
C-Grid Vertical, Dual Row, High Profile, Surface Mount PCB Connectors	<u>71395</u>
C-Grid Vertical, Dual Row, High Profile, Through Hole PCB Receptacles	<u>71850</u>
SL Dual Row Crimp Housings	<u>70450</u>