

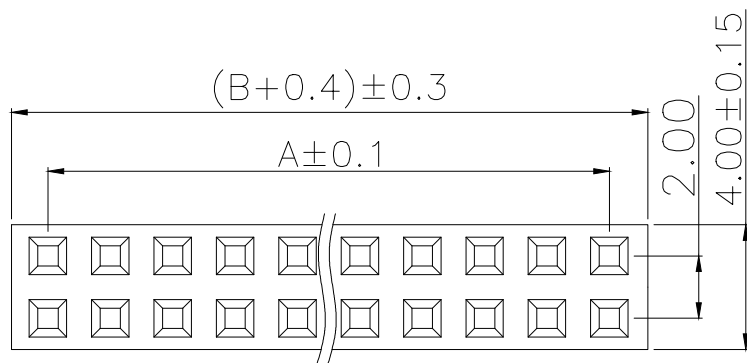
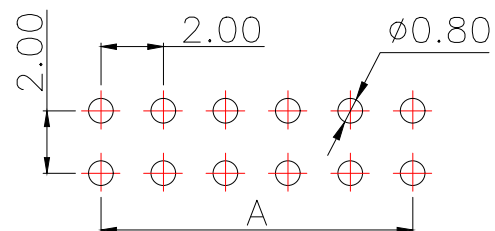




SPECIFICATIONS

Current Rating: 1.5 Amps
Insulation Resistance: 1000M Ω Min
Contact Resistance: 20m Ω Max
Withstanding Voltage: AC 500V
Operation Temperature: -40°to+105°
Contact Material: Brass
Standard: PA6T
Insulator Material: Polyester(UL 94V-0)
Contact Plating: Gold Flash
Max.Processing Temp: 240°C for 30-60seconds
(260°C for 5 seconds)

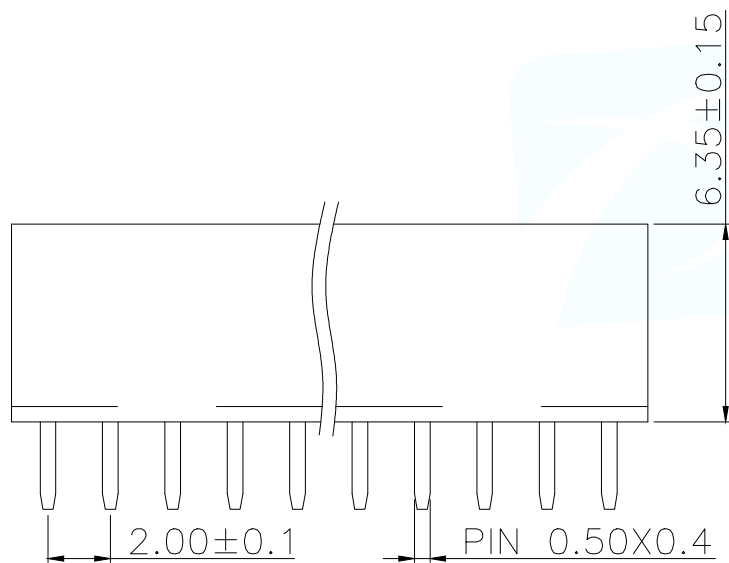

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE:±0.05 (TOP VIEW)

P/N	PIN	DIM.A	DIM.B
FH2.0-09-01PZS	2*1	0.00	2.00
FH2.0-09-02PZS	2*2	2.00	4.00
FH2.0-09-03PZS	2*3	4.00	6.00
FH2.0-09-04PZS	2*4	6.00	8.00
FH2.0-09-05PZS	2*5	8.00	10.00
FH2.0-09-06PZS	2*6	10.00	12.00
FH2.0-09-07PZS	2*7	12.00	14.00
FH2.0-09-08PZS	2*8	14.00	16.00
FH2.0-09-09PZS	2*9	16.00	18.00
.....			
FH2.0-09-40PZS	2*40	(PIN-1)x2.0	(PIN)x2.0

PART NUMBER DESCRIPTION:

FH2.0-09-NPZS

(D=单排;S=双排)
(Z=直脚;W=弯脚)
(PIN数量;01.....40PIN)
(排针开关)

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:2.0FH H6.35 2xnPin 180度 Y型 PC2.8 6T
			PAR FH2.0-09-NPZS
DECIMALS:	ANGLES:		DWN
X.±0.30	X°±5'		CHKD
X.X±0.20	X.X°±1'		APVD
X.XX±0.10	X.XX°±0.5'		SCALE N:A
CUSTOMER COPY		SIZE:A4	UNIT:MM
		SHEET:1F1	REV:A