

232-100-H2

Box Mount Hermetic Receptacle

MIL-DTL-38999 Series II Type



How To Order: Commercial

Connector Series
232 - Series II Type

Shell Style
H2 - Hermetic Box Mount

Shell Size
08, 10, 12, 14, 16, 18, 20, 22, 24

Contact Termination
P - Pin, Solder Cup S - Socket, Solder Cup
X - Pin, Eyelet Z - Socket, Eyelet
C - Pin, PCB D - Socket, PCB

232 - 100 - H2 Z1 10 - 35 P N

232-100-H2
Supersedes original
DLA equivalent part
number 233-002

Connector Type
100 - Hermetic
Receptacle

Connector Material / Finish
ZL - CRES, Nickel
Z1 - CRES, Passivated
FT - Carbon Steel, Fused Tin

Insert Arrangement
Per MIL-STD-1560;
See Pages B-2 - B-4

Alternate Key Position
A, B, C, D,
(N = Normal)

TABLE I: CONNECTOR DIMENSIONS


SHELL SIZE	A BSC	B SQ MAX	Ø C HOLES	Ø E MAX	F MAX	V Diameter
8/08	.594(15.1)	.828(21.0)	.130(3.3) .115(2.9)	1.078(27.4)	.453(11.5)	.562(14.3)
10	.719(18.3)	.954(24.2)		1.266(32.2)		.672(17.1)
12	.812(20.6)	1.047(26.6)		1.391(35.3)		.781(19.8)
14	.906(23.0)	1.141(29.0)		1.516(38.5)		.906(23.0)
16	.969(24.6)	1.234(31.3)		1.641(41.7)		1.031(26.2)
18	1.062(27.0)	1.328(33.7)		1.766(44.9)		1.156(29.4)
20	1.156(29.4)	1.453(36.9)		1.891(48.0)		1.250(31.8)
22	1.250(31.8)	1.578(40.1)		2.016(51.2)		1.375(34.9)
24	1.375(34.9)	1.703(43.3)	.157(4.0) .142(3.6)	2.204(56.0)	.484(12.3)	1.500(38.1)

TABLE II: CONTACT SIZE

PRINTED CIRCUIT TAIL CONFIGURATIONS CONTACT STYLE C AND D	
Contact Size	Ø P
22D	.011 (0.28) .015 (0.38)
20	.024 (0.61) .028 (0.71)
16	.0635 (1.61) .0615 (1.56)
12	.095 (2.41) .093 (2.36)

TABLE I (CONTINUED):
CONNECTOR DIMENSIONS

SHELL SIZE	Ø G HOLES	Ø H MIN	Ø J BSC
8/08	.133(3.4) .123(3.1)	.570(14.5)	.594(15.1)
10		.690(17.5)	.719(18.3)
12		.820(20.8)	.812(20.6)
14		.940(23.9)	.906(23.0)
16		1.070(27.2)	.969(24.6)
18		1.190(30.2)	1.062(27.0)
20	.159(4.0) .149(3.8)	1.320(33.5)	1.156(29.4)
22		1.440(36.6)	1.250(31.8)
24		1.570(39.9)	1.375(34.9)

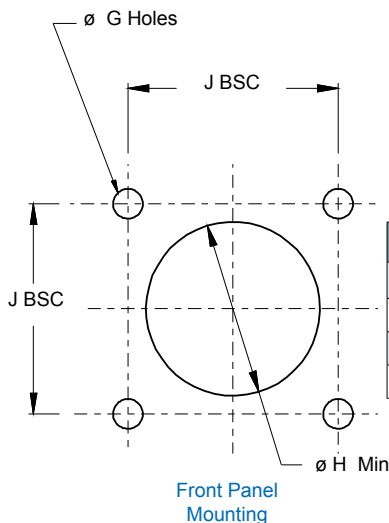

HERMETIC LEAK RATE MOD CODES

Designator	Required Leak Rate
-585A	1 x 10 ⁻¹⁰ cc Helium per second
-585B	1 x 10 ⁻⁹ cc Helium per second
-585C	1 x 10 ⁻⁸ cc Helium per second

WIRE ACCOMODATION

Contact Size	Wire Gauge
22D	#22 - #28
20	#20 - #24
16	#16 - #20
12	#12 - #14

Dimensions in Inches (millimeters) are subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

[232-100-H2FT08-35PN](#) [232-100-H2FT10-98PN](#) [232-100-H2FT10-99PN](#) [232-100-H2FT12-08PN](#) [232-100-H2FT12-98PN](#) [232-100-H2FT14-05PN](#) [232-100-H2FT16-08PN](#) [232-100-H2FT24-29PN](#) [232-100-H2Z110-05PN](#) [232-100-H2Z110-35PN](#) [232-100-H2Z110-99PB](#) [232-100-H2Z114-97PN](#) [232-100-H2Z116-26PN](#) [232-100-H2Z118-32PN](#) [232-100-H2Z118-35PN](#) [232-100-H2Z120-16PA](#) [232-100-H2Z122-55PN](#) [232-100-H2Z124-24PN](#) [232-100-H2ZL08-35PN](#) [232-100-H2ZL10-05PN](#) [232-100-H2ZL10-35PN](#) [232-100-H2ZL10-99PN](#) [232-100-H2ZL14-97PN](#) [232-100-H2ZL18-32PN](#) [232-100-H2ZL20-41PN](#) [232-100-H2Z112-35PN](#) [232-100-H2Z108-98PN](#) [232-100-H2Z120-39PN](#) [232-100-H2Z112-04SN](#) [232-100-H2ZL12-08PN](#) [232-100-H2Z114-18PN](#) [232-100-H2Z116-08SN](#) [232-100-H2Z114-35PN](#) [232-100-H2FT10-99CN](#) [232-100-H2Z110-99SN](#) [232-100-H2Z116-35PN](#) [232-100-H2Z112-04PN](#) [232-100-H2ZL08-35SN](#) [232-100-H2FT12-35PN](#) [232-100-H2Z118-35CN](#) [232-100-H2Z110-98PB](#) [232-100-H2Z122-35CN](#) [232-100-H2Z124-35CN](#) [232-100-H2ZL16-26SN](#) [232-100-H2Z124-19PN](#) [232-100-H2Z110-35PA](#) [232-100-H2ZL08-35PA](#)