

Product Construction:
36 Conductor Cable
Shielded and Jacketed

Product Description
VG 95218 T028 E003
(EPD 93762*)

Issue B
S'sedes A


Designer Date

Janice Campbell 27/03/2002

Product Manager Date

Martyn Cook 27/03/2002

Page 1
of 1

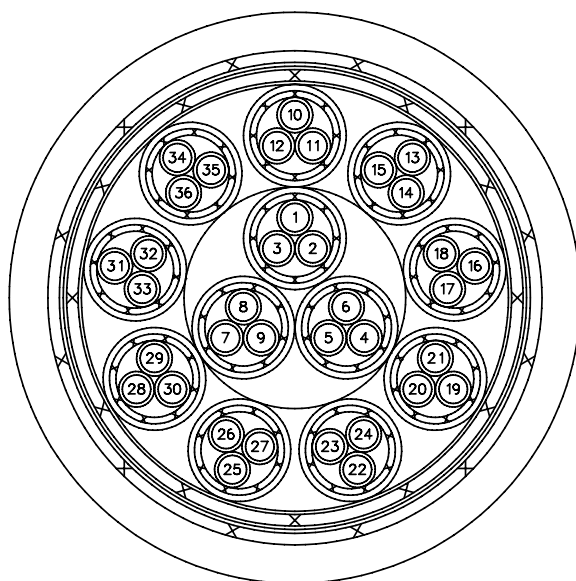

Controlled Customer Copy

BWB
GERMANY

Specifications

VG 95218 Part 28 Type E

The copyright in this drawing is the property of Tyco Electronics UK Limited. The drawing is issued on condition it is not copied, reproduced or disclosed to a third party either in whole or in part without prior written consent of Tyco Electronics UK Limited.

Layer Type / Operation	Component Details Part Numbers refer to issue in effect at date of issue of this EPD.	Nominal O.D.mm
Components: Cable	12 of VG 95218-T023-C013 Numbers as above	
Cabling: Layer 1 Layer 2	3 of VG 95218-T023-C013 9 of VG 95218-T023-C013	16.6
Wrap:	Mylar	16.7
Shield: Optimised Braid	Tin Plated Copper	17.6
Wrap:	Mylar	17.7
Wrap:	Mylar	18.0
Shield: Optimised Braid	Tin Plated Copper	18.9
Jacket: Extrusion 1	Zerohal* - Black. Marked 'Raychem - VG 95218 T028 E003 - K1010 - VDE Reg.Nr. 7708'	21.9 ±1.1 1.09mm minimum wall
Maximum Surface Transfer Impedance 5 milli ohms/metre @ 30 Mhz 15 milli ohms/metre @ 10 MHz	Notes Braids - AWG 32	Calculated M_{AV} weight (Kg/Km) 835

* - Raychem Trademark

Lengths: Unless otherwise specified on your order this cable may be supplied in the following maximum number of continuous lengths:

Order Quantity (m)

100

+ One other length

Tyco Electronics UK Ltd
Faraday Road, Dorcan
Swindon SN3 5HH
Tel: (01793) 528171
Telex: 449409

Registration Number:
550926 London, England