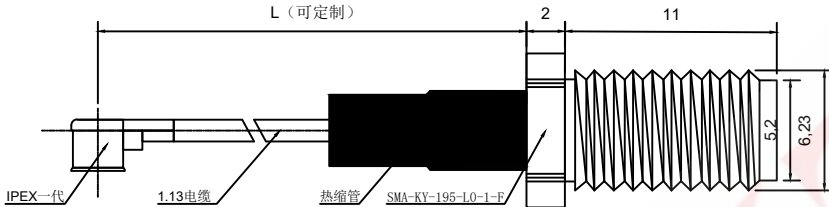
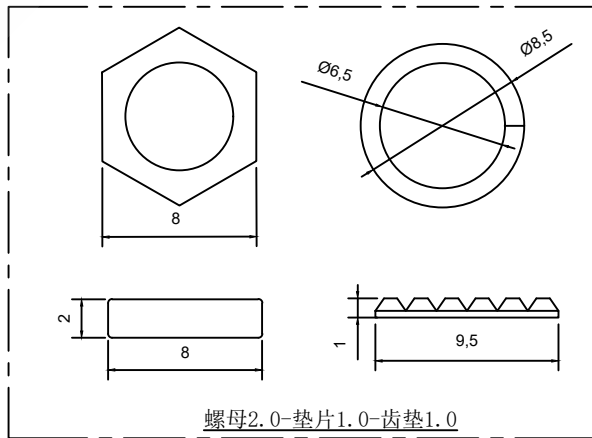



1		2		3		4		5		6		7		8			
SAMZO		REAC/ROHS								REV	ECN NO	DESRIPTION	DESIGN	APPROVAL	DATE		
										A1	NEW	Replace frame			2018.06.12		
										Technical Requirements: →.Frequency: 0 ~ 6GHz →.Impedance: 50 Ω →.Voltage Standing Wave Ratio (VSWR): ≤ 1.8 →.Operating Voltage: 335V →.Withstand Voltage: 1000V →.Insulation Resistance: ≥ 5000M Ω →.Contact Resistance: Inner conductor ≤ 3 mΩ Outer conductor ≤ 2 mΩ →.Insertion Loss: ≤ 0.5dB							
																	
																	
SMA-KY-IP-00-* Wire length线长:L=可定制 Series number系列编号:00-A01 Butt joint end对接端:IPEX-1代 Product number编号:KY-IPEX Product series系列:SMA同轴连接线																	
ITEM	DESCRIPTION	MATERIAL	QTY	FINSH/COLOR						FIRST VIEW		The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM				TITLE:: IPEX转SMA-KY转接线	
F	线材	1.13mm电缆	1	黑色												DWG NO: SMAKY-P003	
E	热缩管	高抗热缩	1	黑色					GENERAL TOLERANCE		PART NO: SMAKY-2301500						
D	IPEX主体结构	黄铜	1	-----					≥0~2<	±0.15	MODEL NO: SMA-KY-IP-00-X						
C	插孔	HPB59-1	1	-----	DESIGN	WANGGUIFA	2018.06.12		≥2~5<	±0.25	NAME: SMA						
B	绝缘体	聚四氟乙烯	1	白色	CHECKED	ZHENGUILAN	2018.06.12		≥0~2<	±0.15	COAXIAL RF CONNECTOR						
A	主体	黄铜	1	镀金	APPROVED	LILIANJIANG	2018.06.14		≥5	±0.35	SAMZO COMPONENTS Electronic switch and connector manufacturer						
1		2		3		4		5		6		7		8			