







REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面升级整理图面	2024.08.24	阿树

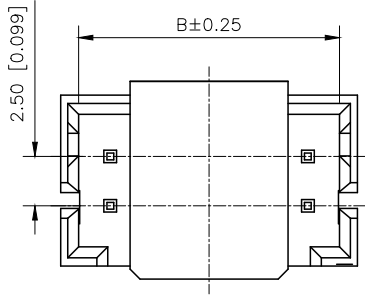

- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:3A AC/DC
 - Withstanding Voltage:800V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤30mΩ

PART NO.:
X8826 W V-2xXX R LP SN
① ② ③ ④ ⑤ ⑥ ⑦

- 1.Series No
2.Category:W-Wafer
3.Welding Board Angle:V-Stright 180°
4.Row No.Pin No:2xXX-2x02~2x12Pin
5.Special No:R-DIP 2.2mm
6.Material:LP-LCP UL94V-0 ,Natural
7.Plating:SN- Tin Plated

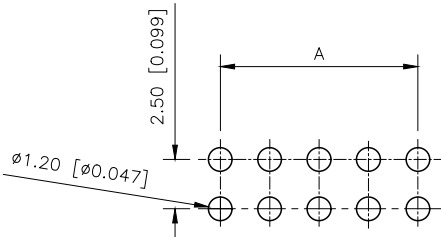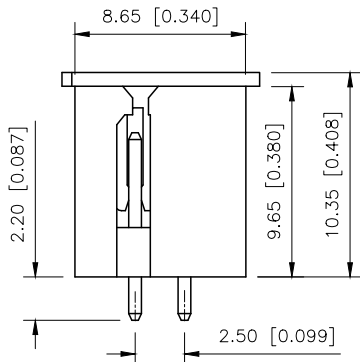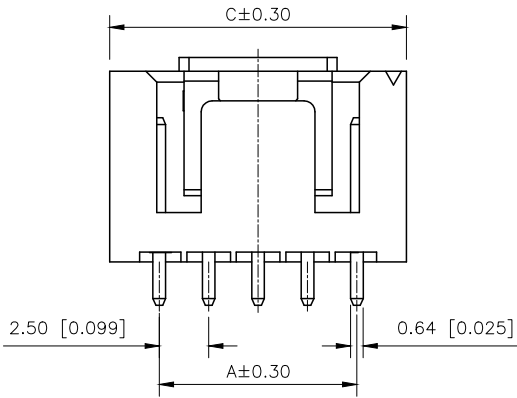

PCB LAYOUT

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
2x02	2.50	5.70	7.50	2x08	17.50	20.70	22.50
2x03	5.00	8.20	10.00	2x09	20.00	23.20	25.00
2x04	7.50	10.70	12.50	2x10	22.50	25.70	27.50
2x05	10.00	13.20	15.00	2x11	25.00	28.20	30.00
2x06	12.50	15.70	17.50	2x12	27.50	30.70	32.50
2x07	15.00	18.20	20.00				

X8826WV-2xXXR-LPSN	LCP	Brass	X8826H
PART NO	Material	Material(Pin)	Suitable XKB Housing

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 2.5mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X8826WV-2xXXR-LPSN
APPROVED		SIZE: A4	DWG NO.: