
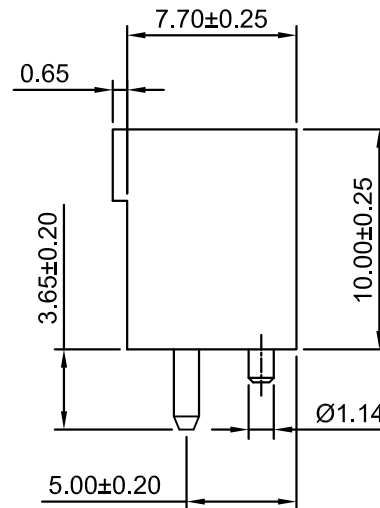
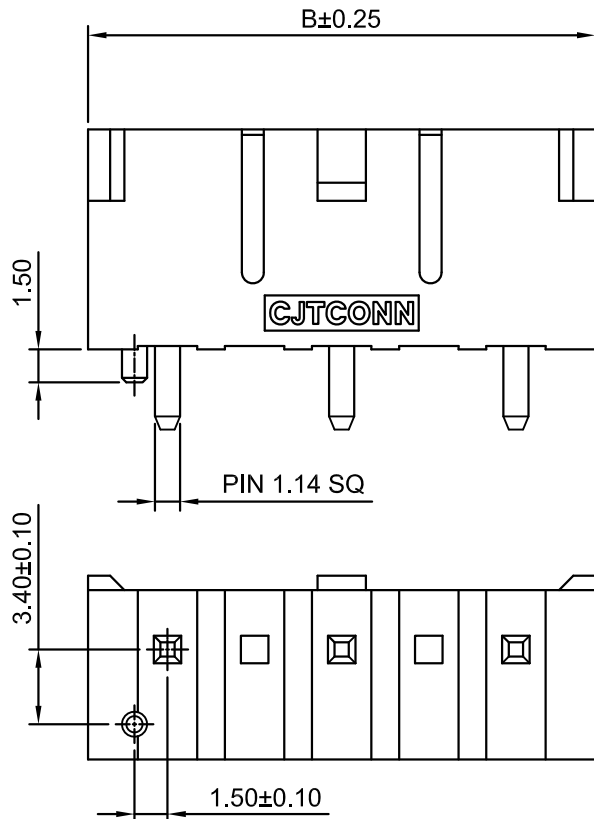
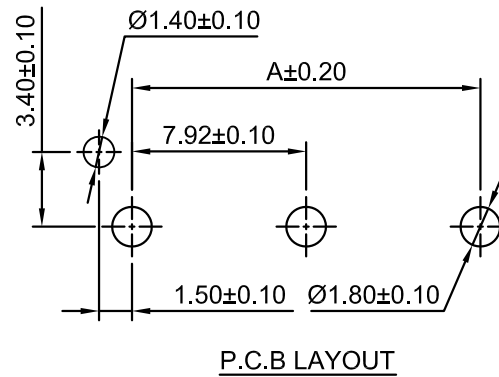


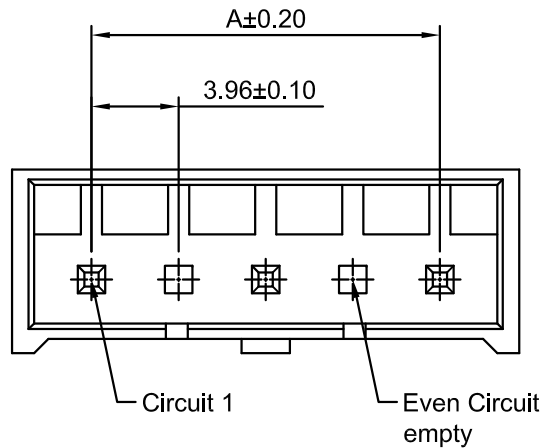

#### Odering Information:

A3965WV-F-XP-A - \*\* - \*\*\*  
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(Ivory)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition  
Glow Wire Capable.

3.Color:

(Blank): Ivory

BK: Black

RD: Red

YL: Yellow

BL: Blue

#### SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance:  $10\text{m}\Omega$  Max

Insulation Resistance:  $1000\text{M}\Omega$  Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(Ivory)

#### Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       | Circuits | Dimensions(mm) |       |
|----------|----------------|-------|----------|----------------|-------|
|          | A              | B     |          | A              | B     |
| 3P       | 7.92           | 15.14 | 11P      | 39.60          | 46.82 |
| 5P       | 15.84          | 23.06 | 13P      | 47.52          | 54.74 |
| 7P       | 23.76          | 30.98 | 15P      | 55.44          | 62.66 |
| 9P       | 31.68          | 38.90 |          |                |       |

**CJTconn**

CHANGJIANG CONNECTORS CO.,LTD.

| Unit | Scale | Sheet  |
|------|-------|--------|
| mm   | 3:1   | 1 of 1 |

Title :

3.96mm Pitch

|             |            |
|-------------|------------|
| Draw By:    | Approved : |
| Dlankul Wan | Jack Yln   |

180° Wafer

General Tolerance

|     |                 |            |
|-----|-----------------|------------|
| A1  | CHANGE THE SIZE | 2020.01.17 |
| A0  | NEW RELEEASE    | 2014.04.21 |
| REV | DESCRIPTION     | DATE       |

|            |         |
|------------|---------|
| x.x±0.25   | PROJECT |
| x.xx±0.20  |         |
| x.xxx±0.15 |         |

DRAW NO : A3965WV-F-XP-A

REV  
A1