

641964-1 ✓ ACTIVE

MATE-N-LOK | Universal MATE-N-LOK

TE Internal #: 641964-1

Header, Receptacle, Wire-to-Board, 2 Position, 6.35 mm [.25 in]

Centerline, Printed Circuit Board, Universal MATE-N-LOK,

Rectangular Power Connectors

[View on TE.com >](#)



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Header**

Connector & Housing Type: **Receptacle**

Connector System: **Wire-to-Board**

Number of Positions: **2**

Centerline (Pitch): **6.35 mm [.25 in]**

Features

Product Type Features

Rectangular Power Connector Type	Header
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	2
PCB Mount Orientation	Vertical
Number of Power Positions	2
Number of Signal Positions	0
Number of Rows	1

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Contact Features



Multiple Contact Types	Without
Contact Layout	Inline
Contact Mating Area Plating Material	Tin
Contact Current Rating (Max)	12 A
Contact Retention Within Housing	Without
Contact Type	Pin
PCB Contact Termination Area Plating Material	Pre-Tin
Contact Mating Area Plating Material Thickness	3.81 – 5.08 μm [150 – 200 μin]

Termination Features

Termination Post & Tail Length	3.7 mm[.146 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

PCB Mount Alignment Type	Standard Polarized Tail
Strain Relief	Without
Mating Alignment Type	Polarization
Mating Retention	With
Mating Alignment	With
PCB Mount Alignment	With
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Positive Lock
Connector Mounting Type	Board Mount

Housing Features

Centerline (Pitch)	6.35 mm[.25 in]
Housing Color	White
Housing Material	Nylon

Dimensions

PCB Thickness (Recommended)	3.12 mm[.124 in]
-----------------------------	------------------

Usage Conditions

Operating Temperature Range	-40 – 105 $^{\circ}\text{C}$ [-40 – 221 $^{\circ}\text{F}$]
-----------------------------	--

Operation/Application

Circuit Application	Power
---------------------	-------



Industry Standards

CSA Rating	Certified, LR 7189
UL Rating	Recognized
Compatible With Agency/Standards Products	CSA, UL, VDE
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

Packaging Quantity	100
Packaging Method	Bag

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 640713-1
02P UMNL STR/REL & INSERT



TE Part # 1-350589-0
STR/REL CLAMP NATL



TE Part # 350811-1
STR/REL CLAMP



TE Part # 640713-2
02P UMNL STR/RELIEVE



TE Part # 350777-1
02P UMNL PLUG HSG



TE Part # 770017-1
02P UMNLII IN-LNE PLUG HSG KIT



TE Part # 641968-3
04P UMNL PIN HDR ASSY POL 94VO



TE Part # 794269-1
02P UMNL INTERFACE SEAL



TE Part # 794815-1
02P UMNL CAP HSG, HI TEMP




TE Part # 1703062-1
CAP, 2 CIRCUIT, UNIVERSAL MATE-N-LOK



TE Part # 794991-1
02P UMNL BLACK INTERFACE SEAL



TE Part # 1586856-1
02P UMNL CAP HSG, GW

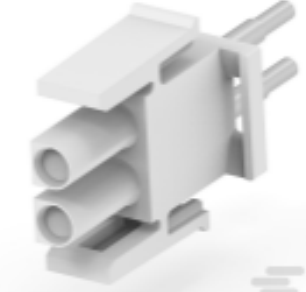

TE Part # 350848-2
02P UMNL PLUG TEST ASSY 94VO



TE Part # 1-640719-1
02P UMNL STR/REL NATL



TE Part # 794270-1
02P UMNL WIRE SEAL



TE Part # 1-640719-0
02P UMNL STR/REL & INSRT NATL



TE Part # 643250-1
02P UMNL ASSY MOD HSG V0



TE Part # 1703062-2
CAP, 2 CIRCUIT, UNIVERSAL MATE-N-LOK



TE Part # 1703062-3
CAP, 2 CIRCUIT, UNIVERSAL MATE-N-LOK



TE Part # 2-480699-0
02P UMNL CAP HSG NATL

Also in the Series | **Universal MATE-N-LOK**



Circular Power Connectors(2)



Connector Caps & Covers(34)



Connector Contacts(209)



Connector Hardware(12)



Connector Seals & Cavity Plugs(27)



Connector Strain Relief(7)



Insertion & Extraction Tools(4)



Rectangular Connector Housings(1)



Rectangular Power Connectors(670)



Standard Circular Connectors(1)


Customers Also Bought



TE Part #3-2176230-1
3522 270R 5% 3W



TE Part #5749231-1
Mini DIN, 6 pos, R/A, Shield

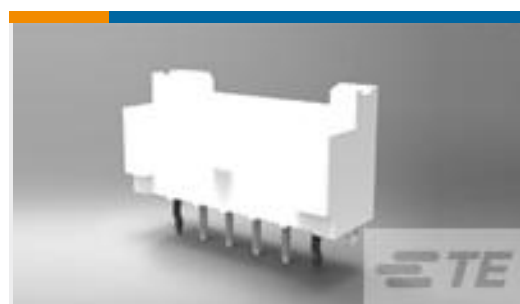


TE Part #2132415-6
EP2.5 Shrouded HDR ASSY 6P VERT w /o boss




TE Part #8-1676481-9
CPF 0603 39K 0.1% 25PPM 1K RL



TE Part #3-2176347-6
CRGCQ 2010 8K2 1%

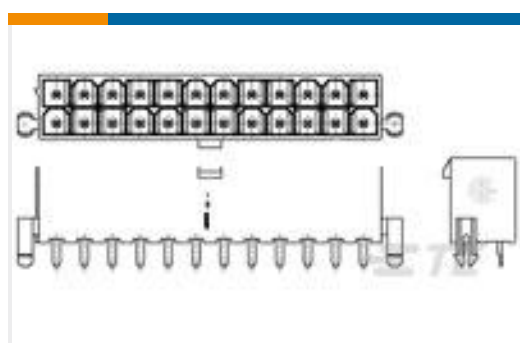

TE Part #1586040-8
8P VAL-U-LOK VRT HDR W/P V0

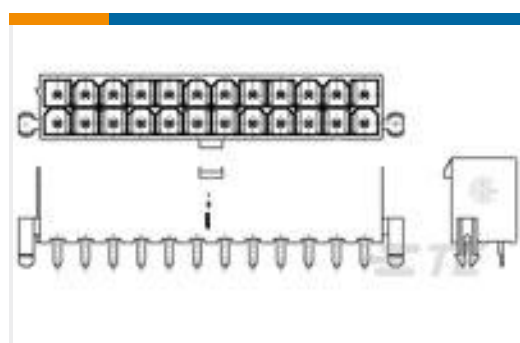

TE Part #1-1586040-2
12P VAL-U-LOK VRT HDR W/P V0



TE Part #1-1623819-4
SBL4 R051 5%



Documents

Product Drawings

[02P UMNL PIN HDR ASSY POL 94VO](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_641964-1_H.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_641964-1_H.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_641964-1_H.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_641964-1_P.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_641964-1_P.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_641964-1_P.2d_dxf.zip](#)

English

[3D PDF](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[SOFT_SHELL_PIN_SOCKET_CONNECTORS_STANDARD_DENSITY](#)

English

Product Specifications

[Application Specification](#)

English



Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL

English