



Connectors > PCB Connectors > PCB Headers & Receptacles > Header Assembly: Wire-to-Board, 5A, gold plated



Connector System: Wire-to-Board

Number of Positions: 6

Number of Rows: 2

Centerline (Pitch): 2.5 mm [.099 in]

PCB Mount Orientation: Horizontal

[All Header Assembly: Wire-to-Board, 5A, gold plated \(44\)](#)

Features

Product Type Features

Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header

Configuration Features

Number of Positions	6
Number of Rows	2
PCB Mount Orientation	Horizontal

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

--	--



Contact Mating Area Plating Material Thickness	.38 µm[15 µin]
Contact Mating Area Plating Material	Gold
Contact Type	Pin
Contact Current Rating (Max)	5 A

Termination Features

Termination Method to PCB	Through Hole - Solder
---------------------------	-----------------------

Mechanical Attachment

Mating Alignment Type	Polarization
Mating Retention	With
PCB Mount Retention Type	Retention Leg
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	Without
PCB Mount Retention	With

Housing Features

Housing Material	Polyester GF
Centerline (Pitch)	2.5 mm[.099 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Box, Tube
------------------	-----------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	



Current ECHA Candidate List: JUNE 2024 (241)
Candidate List Declared Against: JUNE 2024 (241)
Does not contain REACH SVHC

Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
-----------------	--

Solder Process Capability

Wave solder capable to 265°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # CAT-D9934-A66A
Receptacle and Tab Housing: 2.5 mm Pitch, 250V


Also in the Series | Dynamic 2000 Series




Connector Contacts(10)




Connector Hardware(3)



Insertion & Extraction Tools(2)

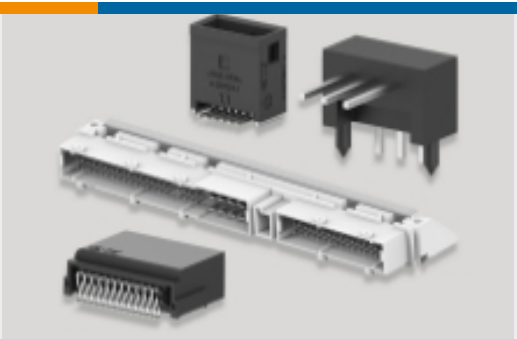

PCB Headers & Receptacles(44)

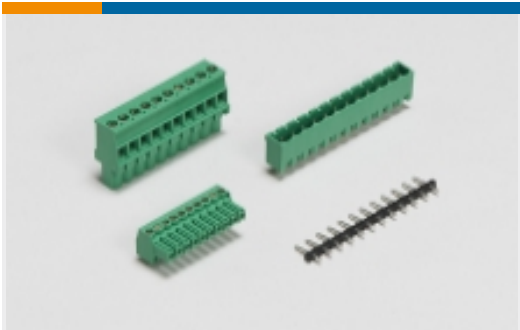

PCB Terminal Blocks(23)



Wire-to-Board Connector Assemblies & Housings(54)

Customers Also Bought



TE Part #EEC-5X650B
ENCLOSURE, 5 X 6.50, BLK, NO VENT



TE Part #1318127-1
DYNAMIC D2100 HDR V ASSY 20P



TE Part #2-1825011-2
ASF42G04=4PDT AUTOSLIDE




TE Part #175164-1
250 PL EX REC. 18-14AWG ST



TE Part #6-160430-6
187 FASTON REC 20-16 AWG BR



TE Part #1879352-9
RR02 5% R68 AMMO

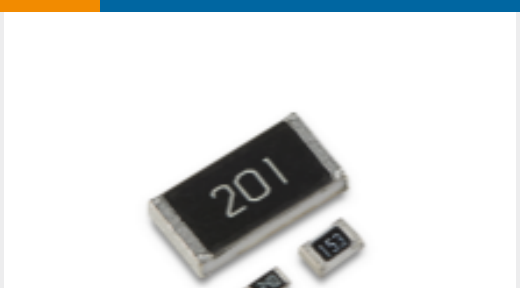

TE Part #2-2176326-5
CRGP 0603 1K0 1%



TE Part #1-172520-1
LOW PRO AMPIN 11P



TE Part #2315752-3
3P, MICRO MNL RCPT HSG SINGLE ROW, V0 GW



TE Part #5053182032
RNF-100-3/8-9-STK

Documents

Product Drawings

DYNAMIC D2100 HDR H ASSY 6P Y

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1376136-2_E.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_1376136-2_E.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1376136-2_E.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Dynamic Connector D-2000 Series

Japanese

Application Specification

Japanese

Agency Approvals

Agency Approval Document

English