




Part Number : [5031482070](#)
Product Description : 1.50mm Pitch, CLIK-Mate PCB Receptacle, Dual Row, Surface Mount, Right-Angle, Tin Plating, Positive Lock, 20 Circuits, Natural, High-Barrier Packaging
Series Number : 503148
Status : Active
Product Category : PCB Headers and Receptacles

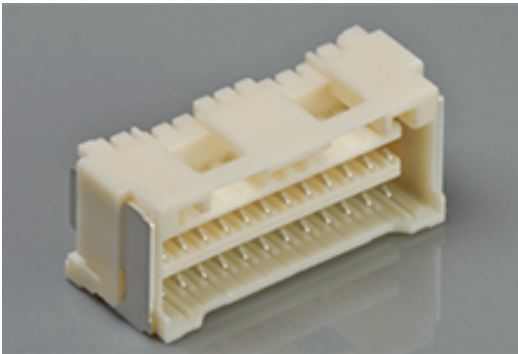

Documents & Resources

Drawings
[Drawing 5031482070_sd.pdf](#)

3D Models and Design Files
[2D Drawing DXF 5031482070.dxf](#)
[2D Drawing DXF \(PDF\) 5031482070.pdf](#)
[3D Model 5031482070_stp.zip](#)

Specifications
[Packaging Specification 5031489200-SPK-200.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Compliant with Exemption 44; 34; 33
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant per EU 2015/863

- Multiple Part Product Compliance Statements
- Eu RoHS
 - REACH SVHC
 - Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	PCB Headers and Receptacles
Series	503148
Description	1.50mm Pitch, CLIK-Mate PCB Receptacle, Dual Row, Surface Mount, Right-Angle, Tin Plating, Positive Lock, 20 Circuits, Natural, High-Barrier Packaging
Application	Signal, Wire-to-Board
Component Type	PCB Receptacle
Product Family	CLIK-Mate Wire-to-Board Connectors
Product Name	CLIK-Mate
UPC	193264875818

Electrical

Current - Maximum per Contact	1.0A
Voltage - Maximum	100V

Physical

Circuits (Loaded)	20
Circuits (maximum)	20
Color - Resin	Natural
Durability (mating cycles max)	30
Glow-Wire Capable	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Mated Height	9.20mm

Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyamide
Number of Rows	2
Orientation	Right Angle
Packaging Type	Embossed Tape on Reel
PCB Locator	No
PCB Retention	Yes
PCB Thickness - Recommended	1.20mm, 1.70mm
Pitch - Mating Interface	1.50mm
Pitch - Termination Interface	0.75mm
Polarized to Mating Part	Yes
Polarized to PCB	No
Robotic Placement	Vacuum Pick-Up Area
Stackable	No
Temperature Range - Operating	-40° to +105°C
Termination Interface Style	Surface Mount

Mates With / Use With

Mates with Part(s)

Description	Part Number
1.50mm Pitch CLIK-Mate Dual Row Plug Housings	<u>503149</u>