

1415297

https://www.phoenixcontact.com/us/products/1415297

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, Power, 5-position, Pin, straight, M12-Standard, coding: L, on free cable end, Rear mounting, M16 x 1.5, Individual wires, cable length: 0.2 m, 2.50 mm^2 , PEX litz wire, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239084

Your advantages

- · Preassembled with litz wires for immediate use
- · Customer-specific assemblies and litz wire lengths available
- Sealed on the litz wire side for optimum leak-tightness
- All standard pin assignments and codings for signal, data, and power transmission with a uniform design-in design
- · For high transmission safety: shield connection to the housing with optional EMC nut
- · SPEEDCON fast locking system reduces cabling times

Commercial data

Item number	1415297
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB24
Product key	ABQCGG
Catalog page	Page 286 (C-2-2019)
GTIN	4055626056265
Weight per piece (including packing)	51.9 g
Weight per piece (excluding packing)	22.22 g
Customs tariff number	85444290
Country of origin	DE



1415297

https://www.phoenixcontact.com/us/products/1415297

Technical data

Notes

Order information:	Lock nut is included in the scope of delivery
Notes on operation	FE not connected to metal parts that can be touched, no protective function

Mounting

Mounting type	Rear mounting M16 \times 1.5 XL version, with flat nut, tightening limitation
Assembly note	XL version, with flat nut, tightening limitation

Product properties

Product type	Circular connectors (device side)
Sensor type	Power
Number of positions	5
No. of cable outlets	1
Shielded	no
Coding	L
Thread type	M12
Data management status	

Data management status

Article revision	13	3
------------------	----	---

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	V0
Seal material	FKM
Material of grip body	Zinc die-cast, nickel-plated
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA 6.6
Material for screw connection	Zinc die-cast, nickel-plated
Conductor material	Tin-plated Cu litz wires

Electrical properties

Rated voltage in acc. with IEC 61076-2-101	63 V
Rated surge voltage	1.5 kV
	1.5 kV AC/DC
Nominal voltage U _N	63 V
Nominal current I _N	16 A



1415297

https://www.phoenixcontact.com/us/products/1415297

Test voltage	1.5 kV
Test voltage Core/Core	6 kV

Connection data

Conductor connection

Connection method	Individual wires
Contact connection type	Pin
Conductor cross section	2.5 mm ²
Tightening torque	0.8 Nm 1.3 Nm (Installation-side)

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100	

Connector

Connection 1

Head design	Pin
Head cable outlet	straight
Head thread type	M12
Head locking type	Standard
Coding	L

Connection 2

Head design	free cable end

Cable/line

Cable length	0.2 m
Cable type	PEX litz wire
Signal type/category	Power
Single wire, color	brown 1, white 2, blue 3, black 4, pink FE
Cable cross section	2.5 mm²
Conductor material	Tin-plated Cu litz wires
Material wire insulation	PE-X
Test voltage Core/Core	6 kV
Halogen-free	according to IEC 60754-1
Flame resistance	in acc. with UL FT-2
Other resistance	Hydrolysis-resistant
Ambient temperature (operation)	-40 °C 105 °C (cable, fixed installation)
	-25 °C 105 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions



1415297

https://www.phoenixcontact.com/us/products/1415297

Standards/specifications

Degree of protection	IP65/IP67
Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)
	-40 °C 85 °C (without mechanical actuation)
	-25 °C 105 °C (Cable, flexible installation)
	-40 °C 105 °C (cable, fixed installation)
Standards and regulations	
Flame resistance	in acc. with UL FT-2
Other resistance	Hydrolysis-resistant
M12	
Standard designation	M12 connector

IEC 61076-2-101




1415297

https://www.phoenixcontact.com/us/products/1415297

Drawings

Schematic diagram

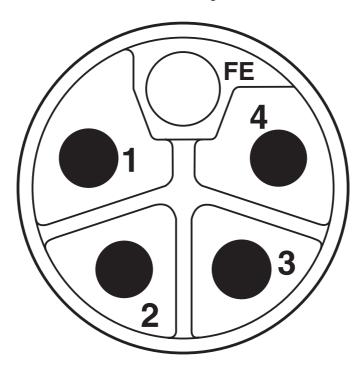

Pin assignment of M12 connector, 5-pos., L-coded, pin side view



1415297

https://www.phoenixcontact.com/us/products/1415297

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1415297

c 911 us	CULus Recognized Approval ID: E468743-20180113				
		Nominal voltage U_N	Nominal current I _N	Cross section AWG	Cross section mm ²
		63 V	16 A	14 - 14	-



1415297

https://www.phoenixcontact.com/us/products/1415297

Classifications

ECLASS

	ECLASS-11.0	27440102	
	ECLASS-12.0	27440116	
	ECLASS-13.0	27440116	
ETIM			
	ETIM 9.0	EC002635	
UNSPSC			
	UNSPSC 21.0	39121400	



1415297

https://www.phoenixcontact.com/us/products/1415297

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	fc116878-d758-4984-8c6a-c346915222a5

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com