



Summary

[Request a quote](#)

[Catalog](#)

Number of contacts Low Voltage	3
Gender	Reverse Gender
Locking system	Push-pull
Size	0B
Series	B - Indoor keyed

https://www.lemo.com/int_en/solutions/originals/b-indoor-keyed/rgj-0b-303-cll.html

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Technical details

Electrical Configuration

R (max)	4.8 mOhm
Insert configuration value	0B.303 - 3 Low Voltage
Insulator	L: PEEK (UL 94 / V-0/1.5)
Rated current	8 A
Vtest (contact-contact)	1200 V (AC), 1700 V (DC)
Vtest (contact-shell)	900 V (AC), 1270 V (DC)
Contact Type	Solder
Max. Solid Conductor	0.34 mm ² (AWG 22)
Max. Stranded Conductor	0.34 mm ² (AWG 22)
Bucket Dia.	0.8 mm (0.031in)
Contact Dia.	0.9 mm (0.04in)
Number of contacts Low Voltage	3
Gender	Reverse Gender

Form & Material

Shell style / Model id	RG - Fixed coupler, nut fixing, key (G) at the flange end and keys (G,J or M) at the other end
Housing material	Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces
Locking system	Push-pull
Keying	Front side: 1 key (alpha=0, female) , Other side: 2 keys (gamma=45, male)
Weight	11.6 g



https://www.lemo.com/int_en/solutions/originals/b-indoor-keyed/rgj-0b-303-cll.html

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Environment

Technical domain	Audio Video, Energy and Industrial, Medical, Semiconductor, Specialties and Other, Test and Measurement, Transportation, Aerospace and UAV
Environmental sealing (IP rating)	IP50
Endurance	5000 mating cycles
Temperature range	-55°C / +250°C
Climatical Category	50/175/21
Humidity (max)	<=95% [at 60 deg C /140 F]
Shielding (min)	75 dB (10 MHz)
Shielding (min)	40 dB (1 GHz)
Shock Resistance	100 g [6 ms]
Vibration	15 g [10 Hz - 2000 Hz]
Salt Spray Corrosion	>1000 hr

Drawings

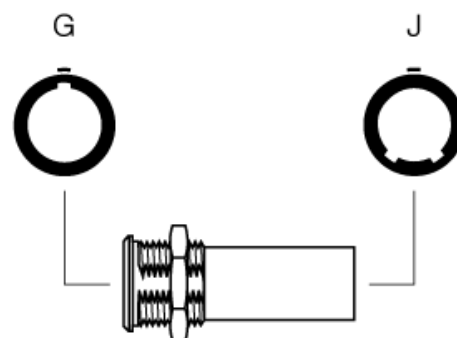

Dimensions

	A	B	e	E	Lmax	M	S1	S3
mm.	12	13.8	M10x0.75	8	43	2	9	12
in.	0.47	0.54		0.31	1.69	0.08	0.35	0.47

https://www.lemo.com/int_en/solutions/originals/b-indoor-keyed/rgj-0b-303-cll.html

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.