


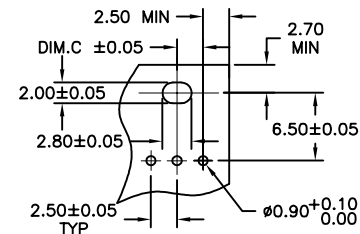

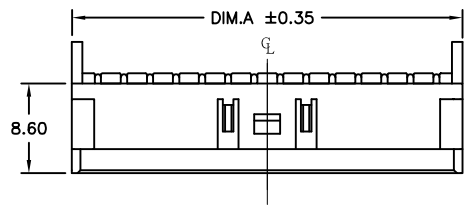



REVISIONS				
#	REV	DESCRIPTION	DATE	BY
A1		RELEASED PER ECR-17-012211	22AUG2017	J.Z


- 1 MATERIAL,
HOUSING: NYLON 94VO, BLUE.
CONTACT: COPPER ALLOY
- 2 FINISH: CONTACT: BRIGHT TIN OVER
NICKEL UNDERPLATED OVER ALL
- 3 CONTACT SOLDERTAIL KINK DIRECTION
(BOARDLOCK). OUTER POSITIONS KINK FRONT,
INSIDE POSITION KINK BACK.
- 4 PRELIMINARY - NOT FOR PRODUCTION.



RECOMMENDED PCB LAYOUT
RECOMMENDED THICKNESS=1.57±0.05

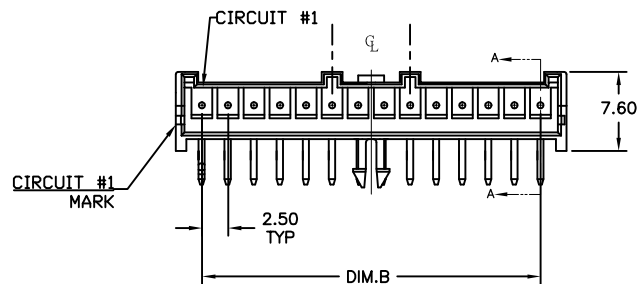

6 TO 20 POSITION

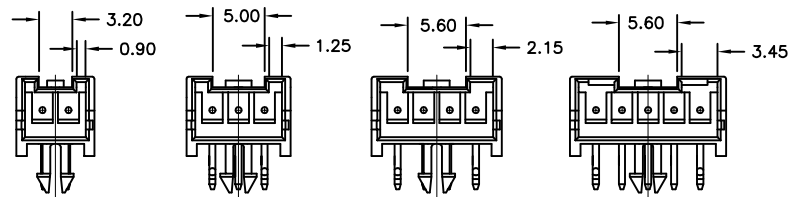


2 POSITION

3 POSITION

4 POSITION

5 POSITION

2 TO 5 POSITION

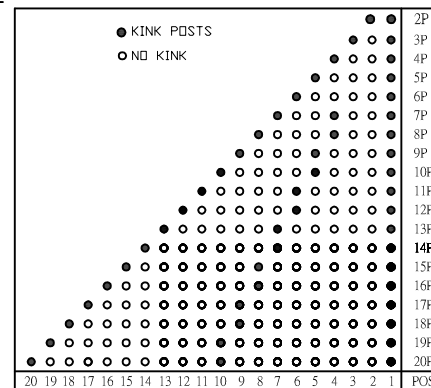

Position of kink

31.25	47.50	52.50	20	△2-2232967-0
28.75	45.00	50.00	19	△1-2232967-9
26.25	42.50	47.50	18	△1-2232967-8
23.75	40.00	45.00	17	△1-2232967-7
21.25	37.50	42.50	16	△1-2232967-6
18.75	35.00	40.00	15	△1-2232967-5
16.25	32.50	37.50	14	△1-2232967-4
15.00	30.00	35.00	13	△1-2232967-3
13.75	27.50	32.50	12	△1-2232967-2
12.50	25.00	30.00	11	△1-2232967-1
11.25	22.50	27.50	10	△1-2232967-0
10.00	20.00	25.00	9	△1-2232967-9
8.75	17.50	22.50	8	△1-2232967-8
7.50	15.00	20.00	7	△1-2232967-7
6.25	12.50	17.50	6	△1-2232967-6
5.00	10.00	15.00	5	△1-2232967-5
3.75	7.50	12.50	4	△1-2232967-4
2.50	5.00	10.00	3	△1-2232967-3
1.25	2.50	7.50	2	△1-2232967-2
DIM.C	DIM.B	DIM.A	POS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN OTTO CHEN 15MAY2015	
DIMENSIONS: mm		CHK DANIEL Z 15MAY2015	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APCD DANIEL Z 15MAY2015	
0 PLC ± -		NAME	
1 PLC ± 0.20		PRODUCT SPEC	
2 PLC ± -		APPLICATION SPEC	
3 PLC ± -		114-13315	
4 PLC ± -		WEIGHT 0	
MATERIAL		SIZE CASE CODE DRAWING NO	
FINISH		A2 00779 C=2232967	
CUSTOMER DRAWING		RESTRICTED TO	
SCALE N/A		SHEET 1 of 1	
REV A1			