

PT 4-PE/L/HESILED 24 (5X20) - Fuse modular terminal block



3002603

<https://www.phoenixcontact.com/us/products/3002603>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, fuse type: Glass / ceramics / ..., fuse type: G / 5 x 20, nom. voltage: 24 V, nominal current: 6.3 A, connection method: Push-in connection, Rated cross section: 4 mm², cross section: 0.2 mm²- 6 mm², connection method: Push-in connection, cross section: 0.2 mm²- 6 mm², mounting type: NS 35/7,5, NS 35/15, color: black

Your advantages

- Convenient testing of fuses with test pick-offs on both sides
- The compact design and front connection enable wiring in a confined space
- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system and by easy and tool-free wiring of conductors with ferrules or solid conductors
- Quick identification of faulty fuses, thanks to LED status indicator
- The easily accessible fuse inserts are easy to use or replace
- In addition to the testing option in the double function shaft, all terminal blocks provide an additional test pick-off

Commercial data

Item number	3002603
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE22
Product key	BE2236
Catalog page	Page 102 (C-1-2019)
GTIN	4055626369686
Weight per piece (including packing)	34 g
Weight per piece (excluding packing)	35 g
Customs tariff number	85369095
Country of origin	CN

PT 4-PE/L/HESILED 24 (5X20) - Fuse modular terminal block



3002603

<https://www.phoenixcontact.com/us/products/3002603>

Technical data

Notes

General	The current is determined by the fuse used, the voltage by the selected LED. If the fuse is faulty, the downstream circuit will not be disconnected.
---------	---------------------------------------------------------------------------------------------------------------------------------------------------------

General

Note	The current is determined by the fuse used, the voltage by the fuse or selected light indicator.
------	--------------------------------------------------------------------------------------------------

Product properties

Product type	Fuse terminal block
Number of connections	5
Number of rows	3
Potentials	3

Data management status

Article revision	08
------------------	----

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Fuse type	Glass / ceramics / ...
Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.02 W
Fuse	G / 5 x 20
LED voltage range	12 V AC/DC ... 30 V AC/DC
LED current range	0.31 mA ... 0.95 mA
Maximum power dissipation	max. 1.6 W (with single arrangement of the fuse terminal block in the event of overload)
	max. 1.6 W (With interconnected arrangement of several fuse terminal blocks in the event of overload)
	max. 4 W (with single arrangement of the fuse terminal block in the event of a short-circuit)
	max. 2.5 W (With interconnected arrangement of several fuse terminal blocks in the event of a short-circuit)

Input data

LED voltage range	12 V AC/DC ... 30 V AC/DC
-------------------	---------------------------

Connection data

Grounding foot	Yes
Number of connections per level	2

PT 4-PE/L/HESILED 24 (5X20) - Fuse modular terminal block



3002603

<https://www.phoenixcontact.com/us/products/3002603>

Nominal cross section	4 mm ²
-----------------------	-------------------

Level 1+2

Stripping length	10 mm ... 12 mm
Internal cylindrical gage	A4
Connection in acc. with standard	IEC 60947-7-1/IEC 60947-7-2
Conductor cross section rigid	0.2 mm ² ... 6 mm ²
Cross section AWG	24 ... 10 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 6 mm ²
Conductor cross section, flexible [AWG]	24 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm ² ... 4 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm ² ... 4 mm ²
Nominal current	6.3 A
Maximum load current	6.3 A (with 6 mm ² conductor cross section, rigid)
Nominal voltage	24 V
Nominal cross section	4 mm ²

Level 3

Stripping length	10 mm ... 12 mm
Connection in acc. with standard	IEC 60947-7-3
Conductor cross section rigid	0.2 mm ² ... 6 mm ²
Cross section AWG	24 ... 10 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 4 mm ²
Conductor cross section, flexible [AWG]	24 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm ² ... 4 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm ² ... 4 mm ²

Level 1+2 Connection cross sections directly pluggable

Conductor cross section rigid	0.5 mm ² ... 6 mm ²
Conductor cross section, rigid [AWG]	20 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm ² ... 4 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 4 mm ²

Level 3 Connection cross sections directly pluggable

Conductor cross section rigid	0.5 mm ² ... 6 mm ²
Conductor cross section, rigid [AWG]	20 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm ² ... 4 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 4 mm ²

Ex data

Rated data (ATEX/IECEx)

Identification	Ex II 3 G Ex ec IIC Gc
Operating temperature range	-60 °C ... 130 °C
Ex-certified accessories	3002619 D-PT 4-PE/L/HESI 1205066 SZS 1,0X4,0 VDE

PT 4-PE/L/HESILED 24 (5X20) - Fuse modular terminal block



3002603

<https://www.phoenixcontact.com/us/products/3002603>

List of bridges	3022276 CLIPFIX 35-5
	3022218 CLIPFIX 35
	Plug-in bridge / FBS 2-6 / 3030336
	Plug-in bridge / FBS 3-6 / 3030242
	Plug-in bridge / FBS 4-6 / 3030255
	Plug-in bridge / FBS 5-6 / 3030349
	Plug-in bridge / FBS 10-6 / 3030271
Bridge data	Plug-in bridge / FBS 20-6 / 3030365
	19 A / 4 mm ²
	275 V
	275 V
	275 V
	275 V
	250 V
output	(Permanent)

Ex connection data General

Nominal cross section	4 mm ²
Rated cross section AWG	12
Connection capacity rigid	0.2 mm ² ... 6 mm ²
Connection capacity AWG	24 ... 10
Connection capacity flexible	0.2 mm ² ... 4 mm ²
Connection capacity AWG	24 ... 12
output	(Permanent)

Ex level Level 2

Rated current	29 A (4 mm ²)
Maximum load current	32 A (6 mm ²)
Contact resistance	0.9 mΩ
Temperature increase	40 K (29 A/4 mm ²)
output	(Permanent)

Ex level Level 3

Rated current	6.3 A (4 mm ²)
Maximum load current	6.3 A (6 mm ²)
Contact resistance	5 mΩ

Dimensions

Width	6.2 mm
Height	119.5 mm
Depth	82.6 mm
Depth on NS 35/7,5	84.1 mm
Depth on NS 35/15	91.6 mm

Material specifications

PT 4-PE/L/HESILED 24 (5X20) - Fuse modular terminal block



3002603

<https://www.phoenixcontact.com/us/products/3002603>

Color	black (RAL 9005)
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Service life test category 1, class B, body mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$
ASD level	$0.964 \text{ (m/s}^2\text{)}^2\text{/Hz}$
Acceleration	0.58g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

Shocks

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	5g
Shock duration	30 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C

PT 4-PE/L/HESILED 24 (5X20) - Fuse modular terminal block



3002603

<https://www.phoenixcontact.com/us/products/3002603>

Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1/IEC 60947-7-2
	IEC 60947-7-3

Mounting

Mounting type	NS 35/7,5
	NS 35/15
Thread type	()


PT 4-PE/L/HESILED 24 (5X20) - Fuse modular terminal block



3002603
<https://www.phoenixcontact.com/us/products/3002603>

Drawings

Application drawing

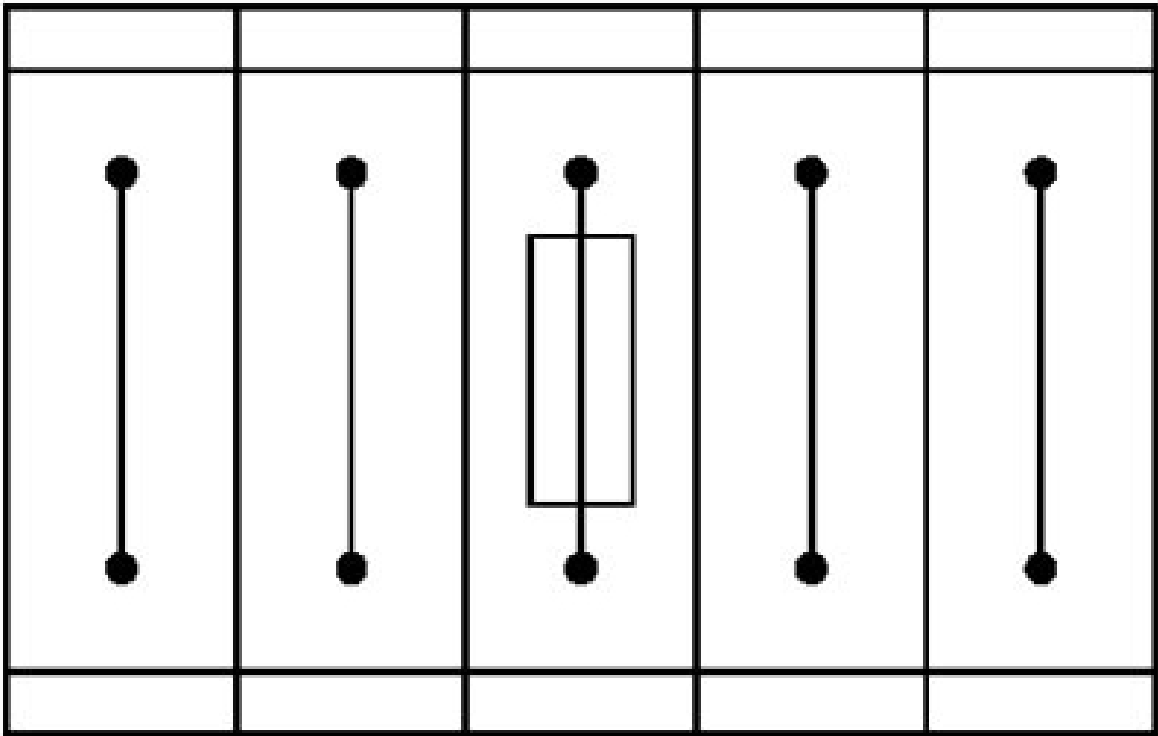


Fuse terminal block in single arrangement,
block consisting of one fuse terminal block and 4 feed-through terminal blocks

PT 4-PE/L/HESILED 24 (5X20) - Fuse modular terminal block

3002603

<https://www.phoenixcontact.com/us/products/3002603>

Circuit diagram

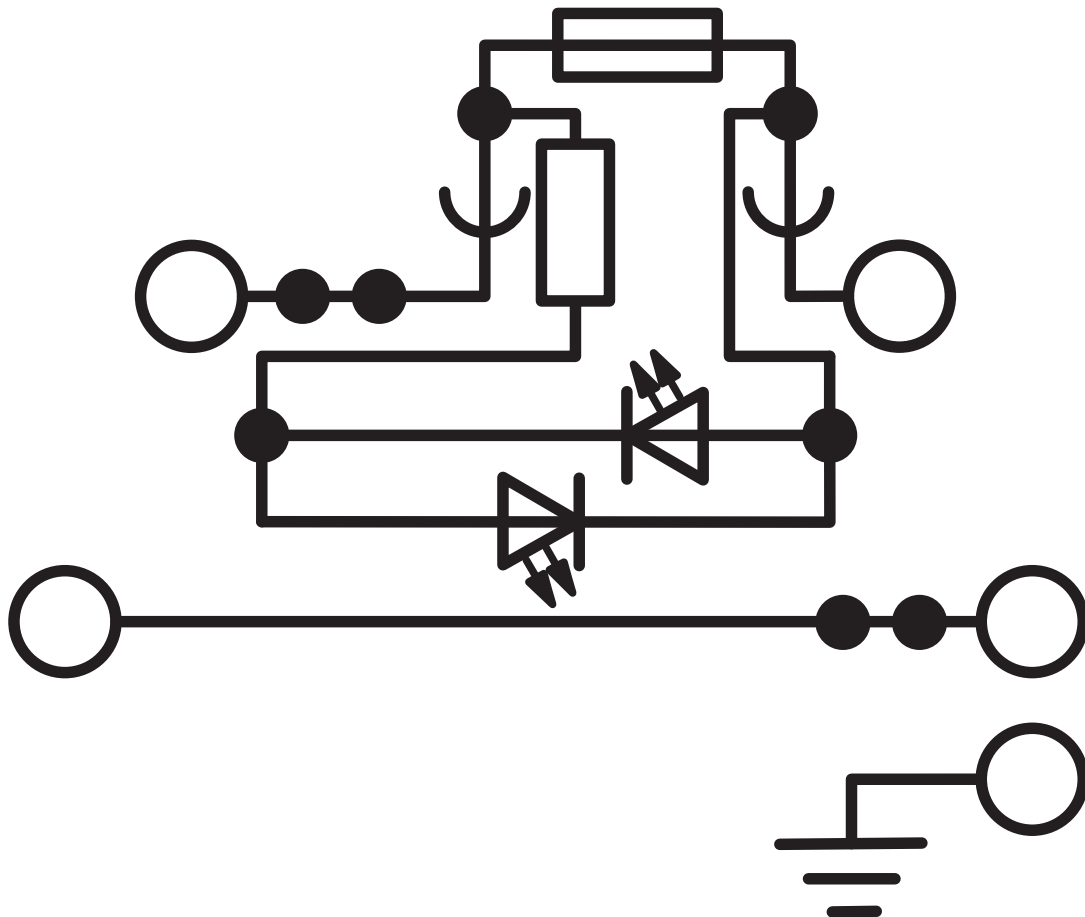


PT 4-PE/L/HESILED 24 (5X20) - Fuse modular terminal block



3002603
<https://www.phoenixcontact.com/us/products/3002603>

Application drawing

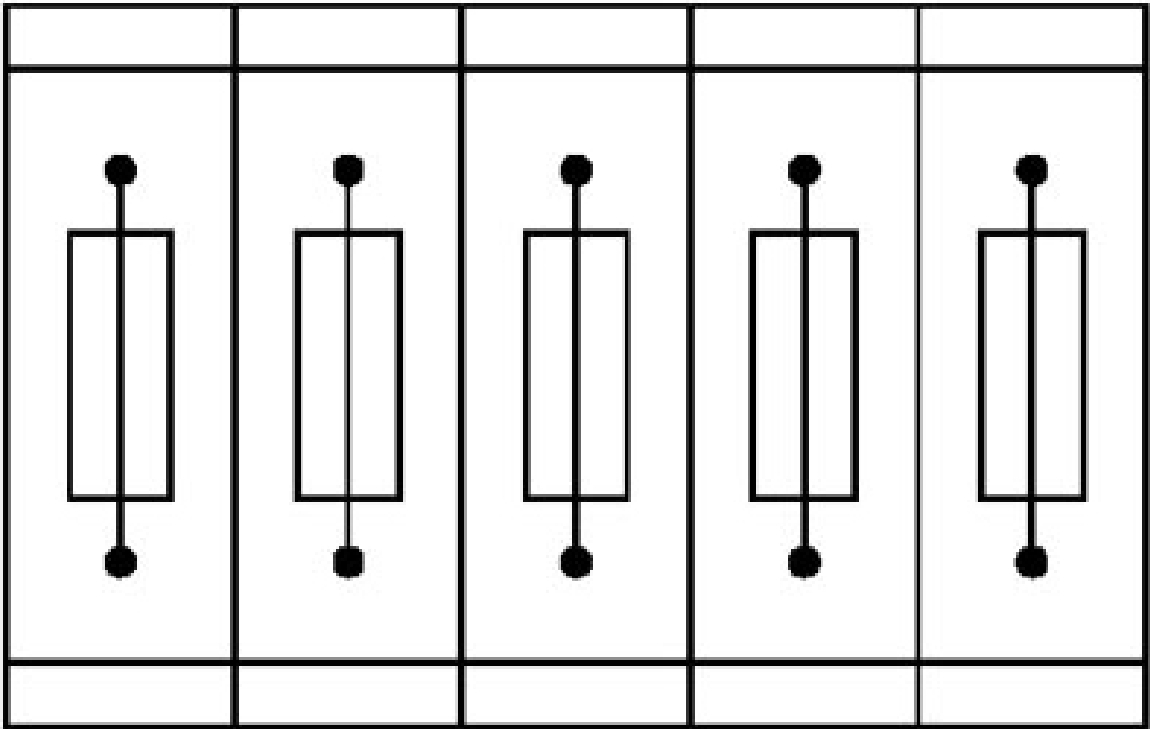

Fuse terminal blocks in interconnected arrangement,
block consisting of 5 fuse terminal blocks

PT 4-PE/L/HESILED 24 (5X20) - Fuse modular terminal block




3002603


<https://www.phoenixcontact.com/us/products/3002603>


Approvals


To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3002603>


 CSA Approval ID: 13631				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B				
upper level	300 V	6.3 A	24 - 10	-
lower level	300 V	20 A	24 - 10	-
Use group C				
upper level	300 V	6.3 A	24 - 10	-
lower level	300 V	20 A	24 - 10	-
Use group D				
	600 V	5 A	24 - 10	-


 EAC Approval ID: RU C-DE.BL08.B.00644				
-------------------------------------------------------------------------------------------------------------------------------------	--	--	--	--


 cULus Recognized Approval ID: E60425				
------------------------------------------------------------------------------------------------------------------------------------	--	--	--	--

 cULus Recognized Approval ID: E60425				
------------------------------------------------------------------------------------------------------------------------------------	--	--	--	--

 cULus Recognized Approval ID: E60425				
------------------------------------------------------------------------------------------------------------------------------------	--	--	--	--

 cUL Recognized Approval ID: E192998				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Feed-through	275 V	20 A	24 - 10	24 - 10
depending on the LED display	275 V	6.3 A	24 - 10	24 - 10

 IECEx Approval ID: IECExKIWA17.0025U				
------------------------------------------------------------------------------------------------------------------------------------	--	--	--	--

 UL Recognized Approval ID: E192998				
----------------------------------------------------------------------------------------------------------------------------------	--	--	--	--

PT 4-PE/L/HESILED 24 (5X20) - Fuse modular terminal block



3002603

<https://www.phoenixcontact.com/us/products/3002603>

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Feed-through	275 V	20 A	24 - 10	-
depending on the LED display	275 V	6.3 A	24 - 10	-



CCC

Approval ID: 2020322313000626



ATEX

Approval ID: KIWA17ATEX0045U



UKCA-EX

Approval ID: CSAE 21UKEX3605U

cULus Recognized

PT 4-PE/L/HESILED 24 (5X20) - Fuse modular terminal block



3002603

<https://www.phoenixcontact.com/us/products/3002603>

Classifications

ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27250113

ETIM

ETIM 9.0	EC000899
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

PT 4-PE/L/HESILED 24 (5X20) - Fuse modular terminal block



3002603
<https://www.phoenixcontact.com/us/products/3002603>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com