



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: .1 – .82 mm²

Mating Tab Width: **4.75 mm** [.187 in]

Mating Tab Thickness: **.81 mm** [.032 in]

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	4.75 mm[.187 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Terminal Material Thickness	.36 mm[.014 in]
Product Length	17.02 mm[.67 in]
Compatible Insulation Diameter Range	2.29 – 3.3 mm[.09 – .13 in]
Wire Size	.1 – .82 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

Compatible With Agency/Standards Products	UL
---	----

Packaging Features

Packaging Quantity	15000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer





This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 175578-1 PL 187 HOUSING RECEPTACLE	 TE Part # 521198-1 HSG.REC.POS-LOK.187 NAT.	 TE Part # 1-172075-6 187 POSITIVE MK-2 REC HSG 3P	 TE Part # 190679-2 POSILOK T'P
 TE Part # 2150432-2 OCEAN_2.0_Applicator-E-080F155F-REA	 TE Part # 2825431-1 187 SERIES POSITIVE LOCK (MARK-II) REC	 TE Part # 7-2150432-7 OCEAN_2.0_SPARE_PART_KIT-080F155F	 TE Part # 936663-1 PL 187 REC 20-16 AWG 0.3 X 14.0 PTPBR

Also in the Series | Mark III

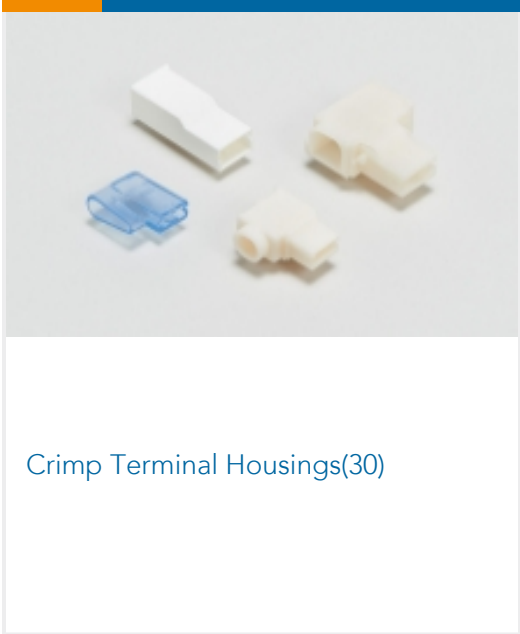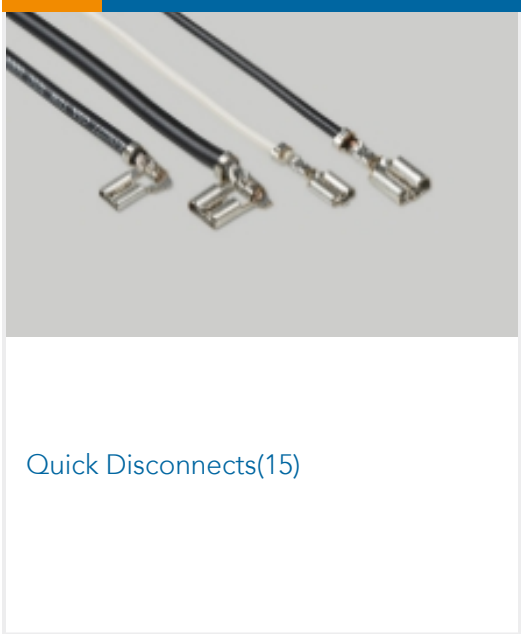 Crimp Terminal Housings(30)	 Quick Disconnects(15)
--	---

Also in the Series | Positive Lock 187



Crimp Terminal Housings(86)



Insertion & Extraction Tools(2)



Insulation Boots & Sleeves(7)



Quick Disconnects(57)

Customers Also Bought



TE Part #130191
TERM, SOLIS R 12-10 5MM



TE Part #3-1624112-2
3650 0402 3.9nH 5% 2K RL




TE Part #7-1452653-3
MCON Receptacle and Tab



TE Part #2-2287720-1
PICO MQS, TERMINAL




TE Part #2150073-1
OCEAN_2.0_Applicator-E-100F140F-REM

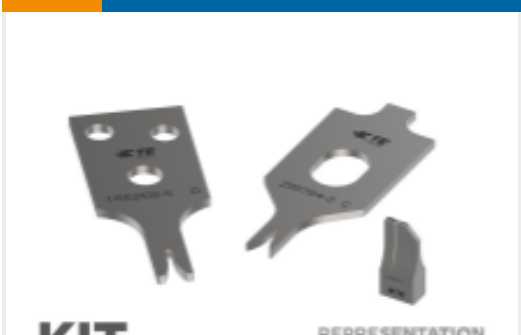

TE Part #7-2150073-7
OCEAN_2.0_SPARE_PART_KIT-100F140F



TE Part #AUA035N00480150000
623 PLUG, ANGLED



TE Part #926211-1
3P MT-EDGE GEH



TE Part #1-1355524-3
MQS ABDECKKAPPE 12P

Documents

Product Drawings

PL 187 TERMINAL REC 22-18 AWG TPBR

English

CAD Files

Customer View Model

ENG_CVM_CVM_1217097-2_L.2d_dxf.zip

English

3D PDF



3D

Customer View Model

[ENG_CVM_CVM_1217097-2_L.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1217097-2_L.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Positive Lock Receptacles](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL Report](#)

English