


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

PROPRIETARY INFORMATION
NOT TO BE RELEASED
WITHOUT WRITTEN PERMISSION
FROM AN AUTHORIZED
REPRESENTATIVE OF
APPLIED ENGINEERING PRODUCTS.

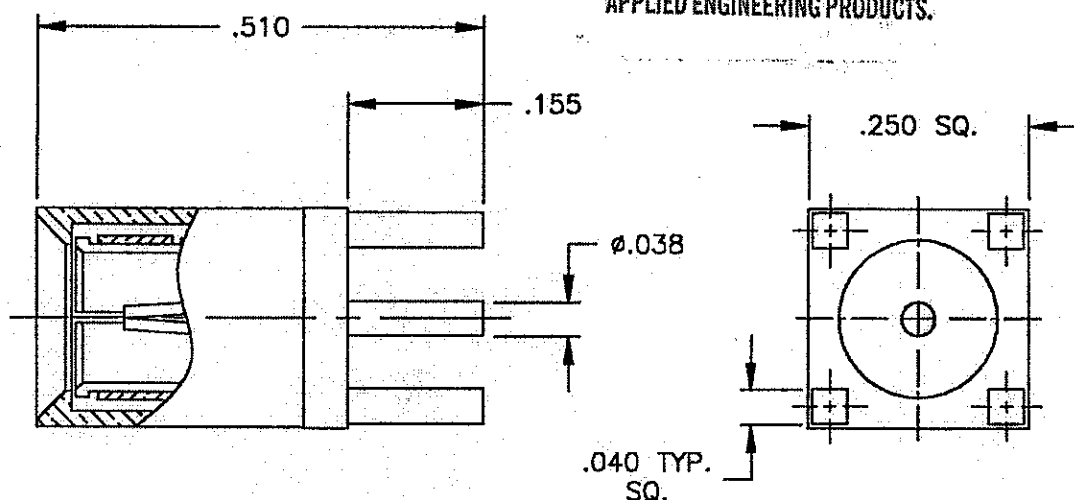

NOTES:

MATERIAL:

- BODY & SLEEVE = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.
- CONTACT & SPRING = BERYLLIUM COPPER PER ASTM B196, ALLOY C173000, TEMPER TD04.
- INSULATOR = TEFLON, PER ASTM D1710, GRADE 1, TYPE II, CLASS A.

FINISHES:

- CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
- ALL OTHER METAL PARTS = NICKEL PLATE PER QQ-N-290, CLASS 1, GRADE G, EXCEPT .0001 - .0002 THK. OVER .00005 - .0001 THK. COPPER PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON FRAC. 1/64 DECIMAL ANGLES $\pm 2^\circ$			DRAWN D.N.		DATE 11-24-97		APPLIED ENGINEERING PRODUCTS 104 John W. Murphy Drive, P.O. Box 510 New Haven, CT 06513	
MATERIAL: SEE NOTES			CHECKED <i>[Signature]</i>		DATE 11/24/97		75 ohm AIR DIELECTRIC STRAIGHT SLIDE-ON FEMALE PRINTED CIRCUIT MOUNT	
			APPROVED <i>[Signature]</i>		DATE 11/24/97		SIZE A	
			FINISH: SEE NOTES		CODE IDENT NO. 19505		8631-7511-005	
			SCALE		5:1		SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

[8631-7511-005](#)