




Part Number : [1201080058](#)
Product Description : Micro-Change (M12) to Ultra-Lock (M12) Double-Ended Cordset, 4 Poles, D-Coded, Male (90°) to Male (90°), 26 AWG, Shielded PUR Cable, 1.0m (3.28') Length
Series Number : 120108
Status : Active
Product Category : Circular Industrial Cordsets
Engineering Number : EWWA06315M010

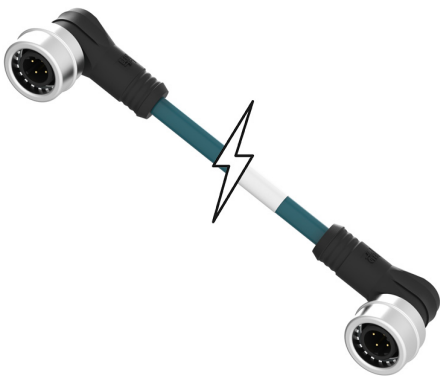

Documents & Resources

Drawings
[Drawing 1201080058_sd.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	Not Reviewed per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Not Reviewed per IEC 61249-2-21
REACH SVHC	Not Reviewed per D(2024)4144-DC (27 June 2024)
EU RoHS	Not Reviewed per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474

Part Details

General

Status	Active
Category	Circular Industrial Cordsets
Series	120108
Description	Micro-Change (M12) to Ultra-Lock (M12) Double-Ended Cordset, 4 Poles, D-Coded, Male (90°) to Male (90°), 26 AWG, Shielded PUR Cable, 1.0m (3.28') Length
IP Rating	IP67
Product Family	Brad Industrial Ethernet Solutions
Product Name	Micro-Change (M12),Ultra-Lock (M12)
Region	America, Asia, Europe
Type	Double Ended
UPC	78172555132

Electrical

Current - Maximum per Contact	1.5A
Voltage - Maximum	30V

Physical

Cable Diameter	6.10mm (.240")
Cable Length	1.0m (3.28')
Color - Cable Jacket	Teal
Connector End A	Micro-Change (M12)
Connector End B	Ultra-Lock (M12)
Coupling Style	Push to Lock
Gender	Male-Male
Keyway	D-Coded
LED Indicator	No
Material - Cable Jacket	PVC
Material - Connector Body	PVC

Material - Contact	Copper Alloy
Material - Coupling Nut	Nickel-plated Brass
Material - O-Ring	Fluoro-elastomer
Material - Plating Mating	Gold
Net Weight	90.865/g
Orientation	90° to 90°
Poles	4
Temperature Range - Operating	-20° to +75°C
Wire/Cable Type	Shielded-Stranded
Wire Size (AWG)	26