

Features

- Operate from 1.65V to 5.5V
- Input and Open-Drain Output
Accept Voltages to 5.5V
- Max tPD of 4 ns at 3.3V
- ESD Protection Exceeds JESD 22
-2000-V Human-Body Model (A114-A)
-200-V Machine Model (A115-A)
-1000-V Charged-Device Model (C101)

General Description

The SN74LVC1G06 is a single inverter and its output is an open drain. This device provides the Function $Y = \overline{A}$ in positive logic.

Applications

- AV Receiver
- Audio Dock: Portable
- Blu-ray Player and Home Theater
- Embedded PC
- Personal Digital Assistant(PDA)
- Power: Telecom/Server AC/DC Supply: Single Controller: Analog and Digital
- Solid State Drive(SSD): Client and Enterprise
- Wireless Headset, Keyboard, and Mouse



Logic Diagram



Ordering Information

ORDER NUMBER	PACKAGE DESCRIPTION	PACKAGE OPTION	Marking
SN74LVC1G06DBVR	SOT23-5	Tape and Reel, 3000	C06F
SN74LVC1G06DCKR	SOT353	Tape and Reel, 3000	CT5
SN74LVC1G06DRLR	SOT553	Tape and Reel, 4000	CT7
SN74LVC1G06DRYR	DFN1X1-6	Tape and Reel, 5000	CT

Pin Configuratio

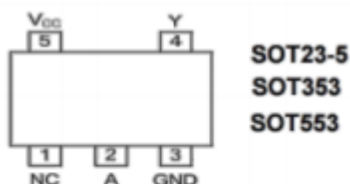

Function Table

INPUT(A)	OUTPUT(Y)
H	L
L	Z

Note: H: High Voltage Level

L: Low Voltage Level

Z: High-Impedance OFF-State

Absolute Maximum Ratings

PARAMETER	SYMBOL	CONDITIONS	RATINGS	UNIT
Supply Voltage	VCC		-0.5 ~ +6.5	V
Input Voltage	VIN		-0.5 ~ +6.5	V
Output Voltage	VOUT		-0.5 ~ +6.5	V
VCC or GND Current	ICC	Output in the Power-off state	±100	mA
Continuous Output Current	IOUT	VOUT=0~VCC	±50	mA
Input Clamp Current	IIK	VIN<0	-50	mA
Output Clamp Current	IOK	VOUT<0	-50	mA
Storage Temperature Range	TSTG		-65 ~ +150	°C
Junction to Ambient	θ_{JA}	SOT-23-5	230	°C/W
		SOT353	280	°C/W
		SOT553	250	°C/W
		DFN1X1-6	460	°C/W

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

Recommended Operating Conditions

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	VCC	Operating	1.65	--	5.5	V
		Data retention only	1.5	--	--	V
Input Voltage	VIN		0	--	5.5	V
Output Voltage	VOUT	High or low state	0	--	VCC	V
Low-Level Output Current	IOL	VCC=1.65V	--	--	4	mA
		VCC=2.3V	--	--	8	mA
		VCC=3V	--	--	16	mA
		VCC=3V	--	--	24	mA
		VCC=4.5V	--	--	32	mA
Input Transition Rise or Fall ate	$\Delta t/\Delta v$	VCC=1.8V±0.15V, 2.5V±0.2V	--	--	20	ns/V
		VCC=3.3V±0.3V	--	--	10	ns/V
		VCC=5V±0.5V	--	--	5	ns/V
Operating Temperature	TA		-40	--	125	°C

Electrical Characteristics (unless otherwise specified)

PARAMETER	SYM BOL	TEST Conditions	TA=25°C			TA=-40°C~+125°C			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
High-Level Input Voltage	V _{IH}	V _{CC} =1.65V ~ 1.95V	0.65×V _{CC}	--	--	0.65×V _{CC}	--	--	V
		V _{CC} =2.3V ~ 2.7V	1.7	--	--	1.7	--	--	V
		V _{CC} =3V ~ 3.6V	2	--	--	2	--	--	V
		V _{CC} =4.5V ~ 5.5V	0.7×V _{CC}	--	--	0.7×V _{CC}	--	--	V
Low-Level Input Voltage	V _{IL}	V _{CC} =1.65V ~ 1.95V	--	--	0.35×V _{CC}	--	--	0.35×V _{CC}	V
		V _{CC} =2.3V ~ 2.7V	--	--	0.7	--	--	0.7	V
		V _{CC} =3V ~ 3.6V	--	--	0.8	--	--	0.8	V
		V _{CC} =4.5V ~ 5.5V	--	--	0.35×V _{CC}	--	--	0.35×V _{CC}	V
Low-Level Output Voltage	V _{OL}	V _{CC} =1.65 ~ 5.5V, I _{OL} =100μA	--	--	0.1	--	--	0.1	V
		V _{CC} =1.65V, I _{OL} =4mA	--	--	0.45	--	--	0.7	V
		V _{CC} =2.3V, I _{OL} =8mA	--	--	0.3	--	--	0.45	V
		V _{CC} =3.0V, I _{OH} =16mA	--	--	0.4	--	--	0.6	V
		V _{CC} =3.0V, I _{OH} =24mA	--	--	0.55	--	--	0.8	V
		V _{CC} =4.5V, I _{OH} =32mA	--	--	0.55	--	--	0.8	V
Input Leakage Current	I _{I(LEAK)}	V _{CC} =0 ~ 5.5V, V _{IN} =5.5V or GND	--	--	±5	--	--	±5	μA
Power OFF Leakage Current	I _{OFF}	V _{CC} =0V, V _{IN} or V _{OUT} =5.5V	--	--	±10	--	--	±10	μA
Quiescent Supply Current	I _Q	V _{CC} =1.65 ~ 5.5V, V _{IN} =V _{CC} or GND, I _{OUT} =0A	--	--	10	--	--	±10	μA
Additional Quiescent Supply Current Per Input Pin	ΔI _Q	V _{CC} =3 ~ 5.5V, One input at V _{CC} -0.6V, Other inputs at V _{CC} or GND	--	--	500	--	--	500	μA


OPERATING CHARACTERISTICS (f=10MHz, TA =25°C , unless otherwise specified)

PARAMETER	SYMBOL	TEST Conditions	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	C _{PD}	V _{CC} =1.8V	--	3	--	pF
		V _{CC} =2.5V	--	3	--	pF
		V _{CC} =3.3V	--	4	--	pF
		V _{CC} =5.0V	--	6	--	pF
Input Capacitance	C _I	V _{CC} =3.3V, V _{IN} =V _{CC} or GND	--	4	--	pF
Output Capacitance	C _O	V _{CC} =3.3V, V _{OUT} =V _{CC} or GND	--	5	--	pF

SWITCHING CHARACTERISTICS (unless otherwise specified)


PARAMETER	SYMBOL	TEST Conditions	TA=25°C			TA=-40°C~+125°C			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
Propagation delay from input (A or B) to output(Y)	t _{PLH} / t _{PHL}	CL=30pF V _{CC} =1.8±0.15V, R _L =1KΩ	2.2	--	6.5	1.0	--	8.5	nS
			1.1	--	6	0.5	--	6.0	nS
		CL=50pF R _L =500Ω	1.2	--	6	0.5	--	7.0	nS
			1	--	5.5	1.0	--	5.5	nS

TEST CIRCUIT AND WAVEFORMS




TEST CIRCUIT

V _{CC}	Inputs		V _M	V _{LOAD}	V _Δ	C _L	R _L
	V _{IN}	t _R , t _F					
1.8V±0.15V	V _{CC}	≤2ns	V _{CC} /2	2 x V _{CC}	0.15V	30pF	1KΩ
2.5V±0.2V	V _{CC}	≤2ns	V _{CC} /2	2 x V _{CC}	0.15V	30pF	500Ω
3.3V±0.3V	3V	≤2.5ns	1.5V	6V	0.3V	50pF	500Ω
5V±0.5V	V _{CC}	≤2.5ns	V _{CC} /2	2 x V _{CC}	0.3V	50pF	500Ω

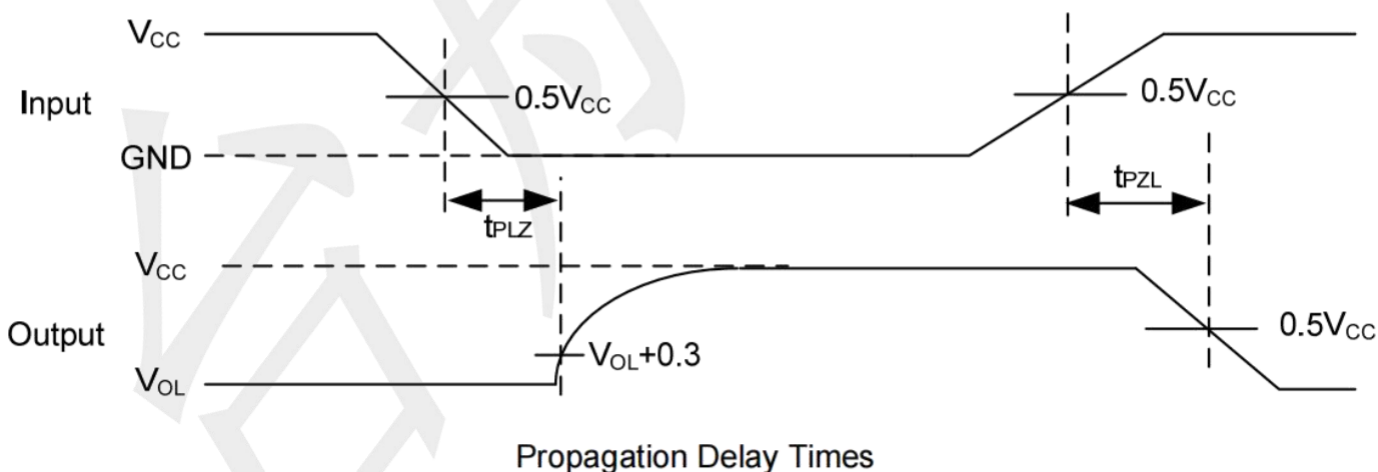


Package information

SOT23-5 (Unit: mm)

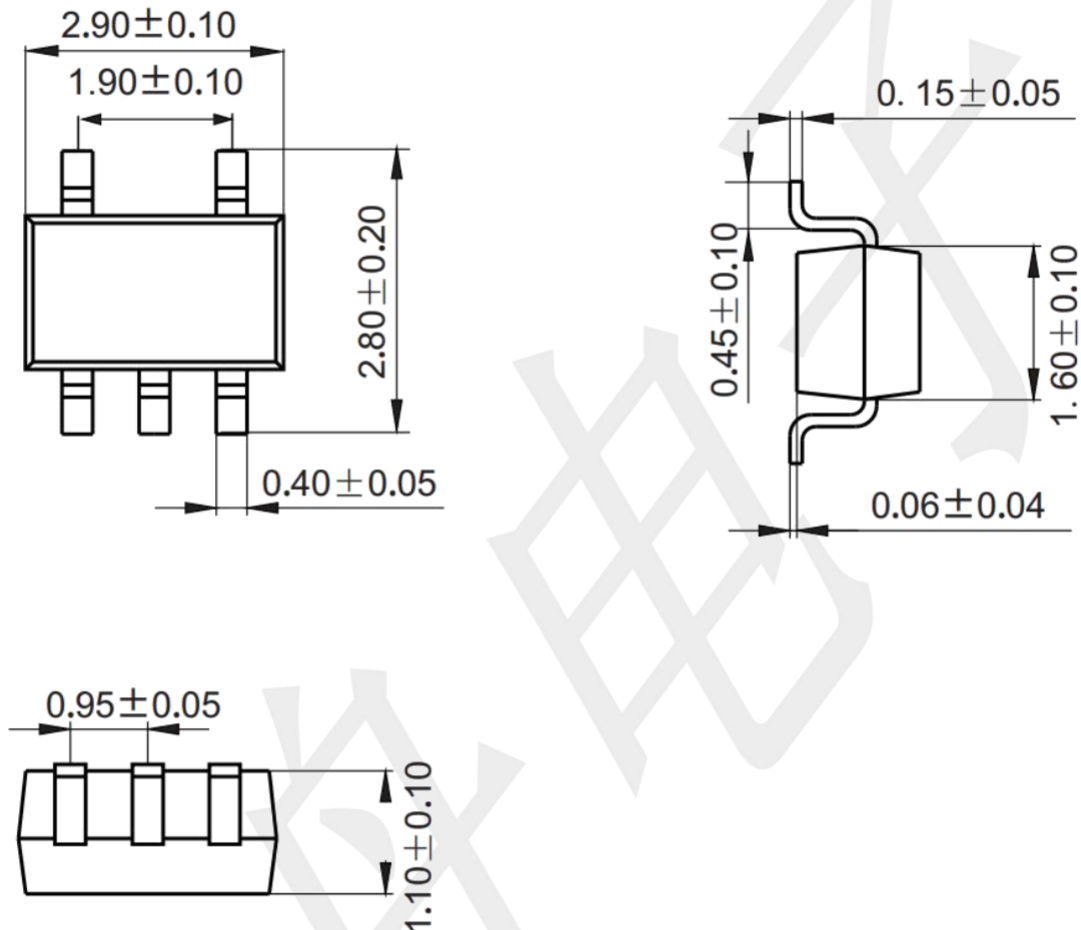


Mounting Pad Layout (unit: mm)

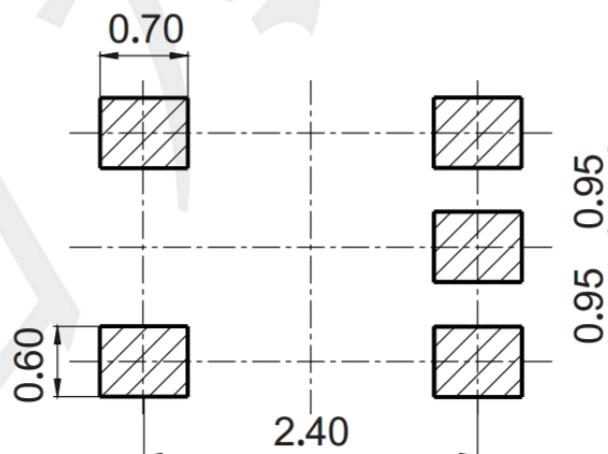


Package information

SOT353 (Unit: mm)

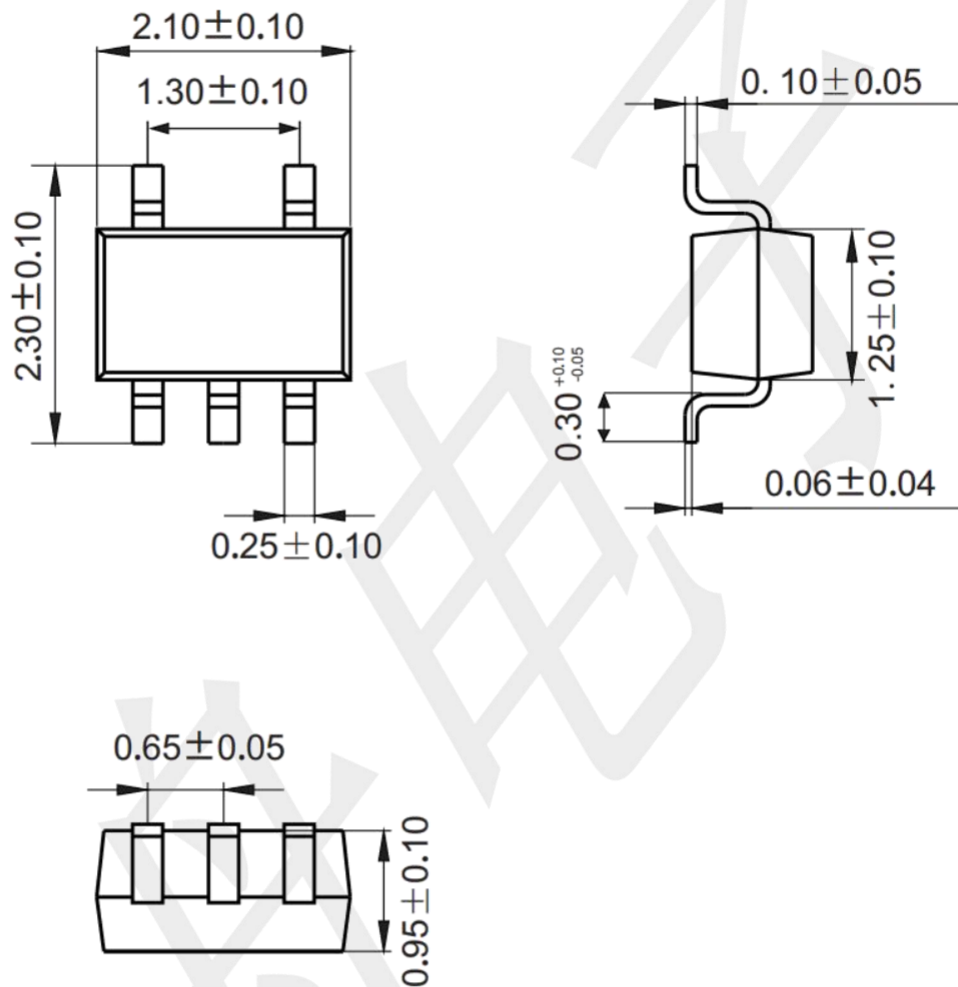


Mounting Pad Layout (unit: mm)

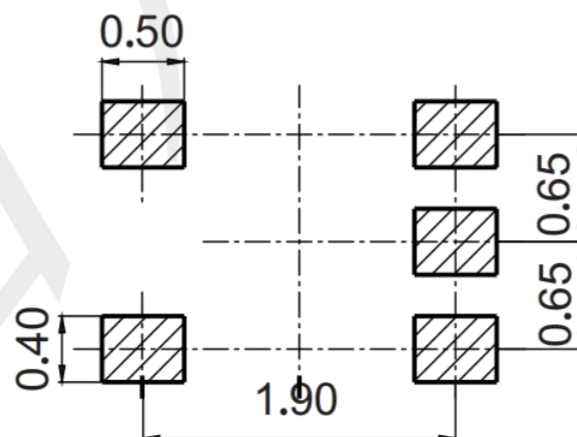


Package information

SOT553 (unit: mm)

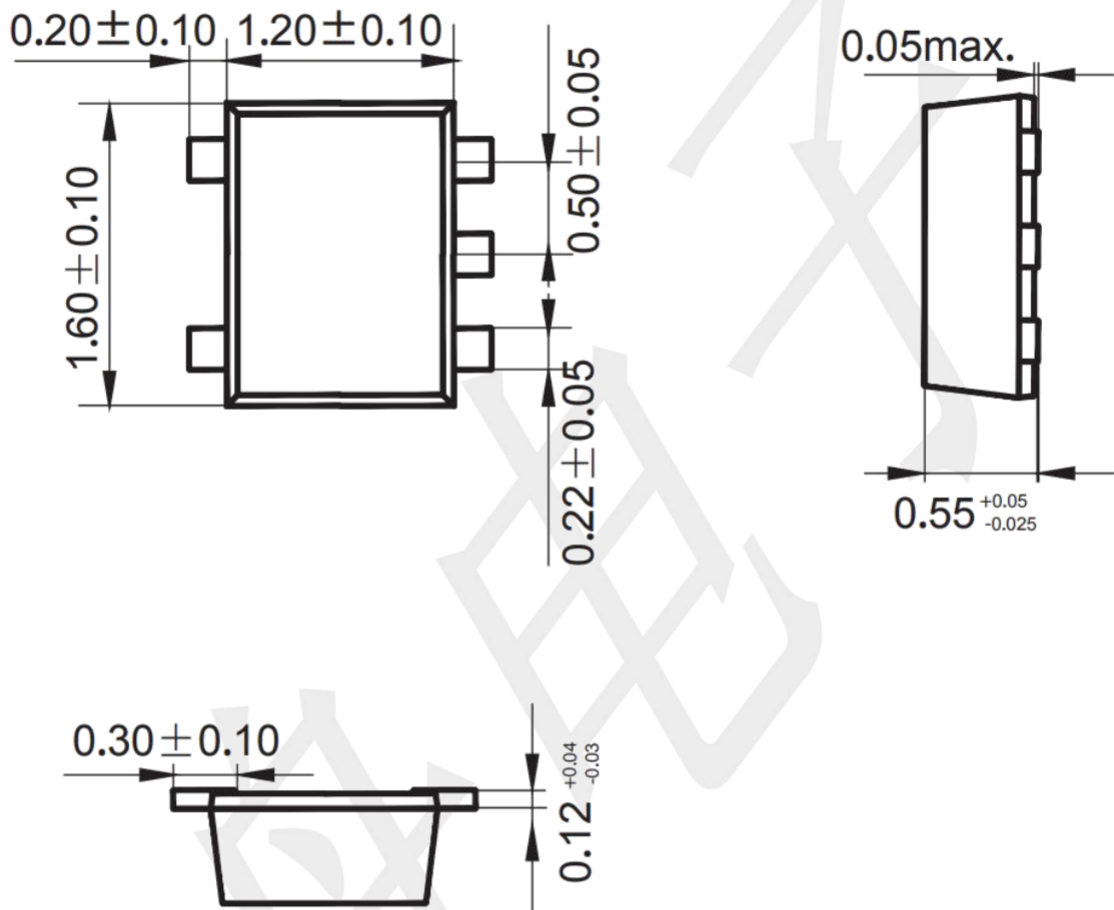


Mounting Pad Layout (unit: mm)

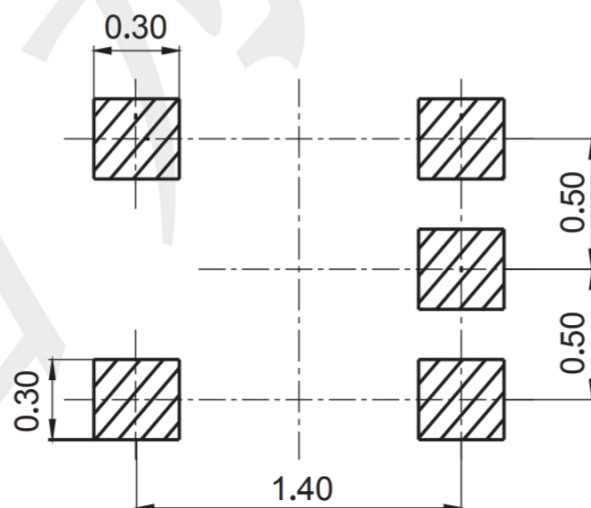


Package information

DFN1X1-6 (unit: mm)

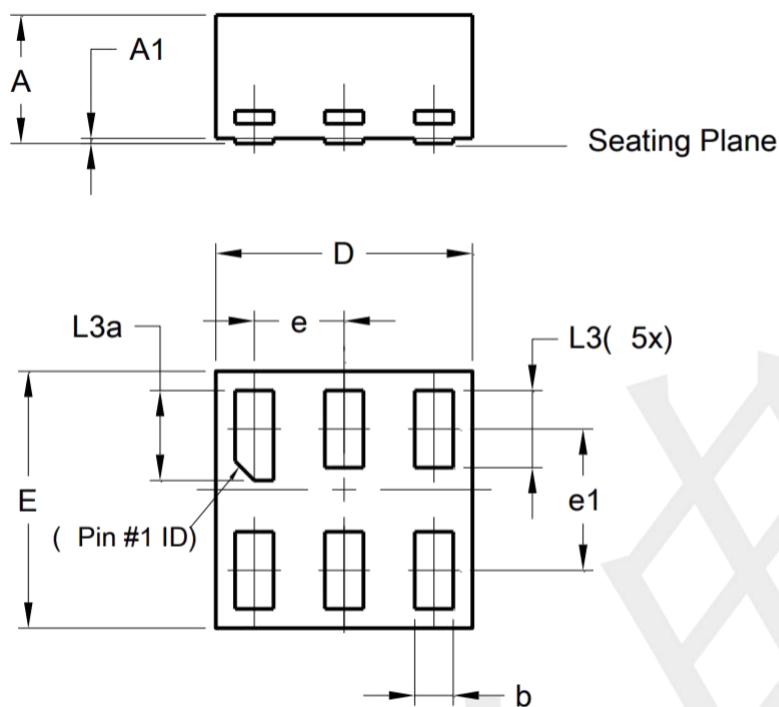

DFN1010-6 (Type B)			
Dim	Min	Max	Typ
A	-	0.50	0.39
A1	-	0.04	-
b	0.12	0.20	0.15
D	0.95	1.050	1.00
E	0.95	1.050	1.00
e	0.35 BSC		
e1	0.55 BSC		
L3	0.27	0.30	0.30
L3a	0.32	0.40	0.35
All Dimensions in mm			

Mounting Pad Layout (unit: mm)

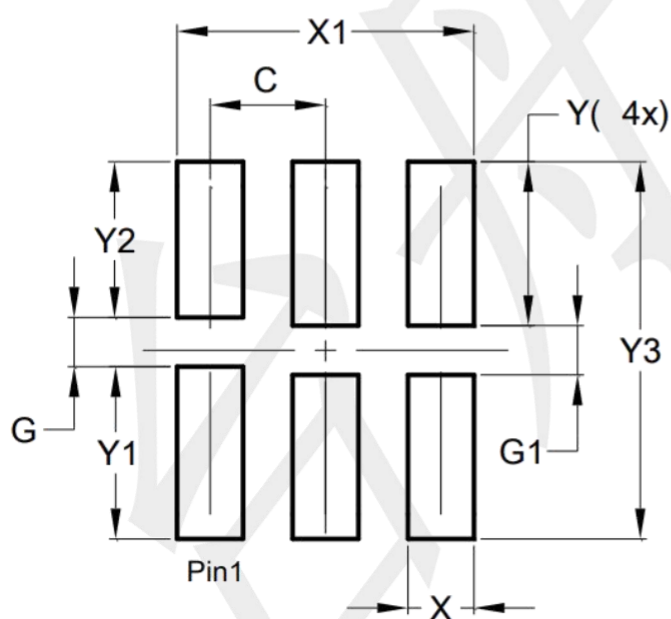

Dimensions	Value (in mm)
C	0.350
G	0.150
G1	0.150
X	0.200
X1	0.900
Y	0.500
Y1	0.525
Y2	0.475
Y3	1.150