



Die deutsche Version dieser Zeichnung dient nur zur Erleichterung der
Anwendung der Änderungen von den englischen Original gilt als
englische Original.
The german version of this drawing has been offered for convenience only
and may deviate from the english original.
In case of any deviation the English version shall prevail.


Verfertigung sowie Verfertigung dieses Dokuments, Vervielfältigung und Mitteilung seines Inhalts sind
verboten, sowie nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz.
Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Geschmackszeichenverletzung vorbehalten.
The reproduction, distribution and utilization of this document as well as the communication
of its contents to others without express authorization is prohibited. Offenders will be held liable for the
payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

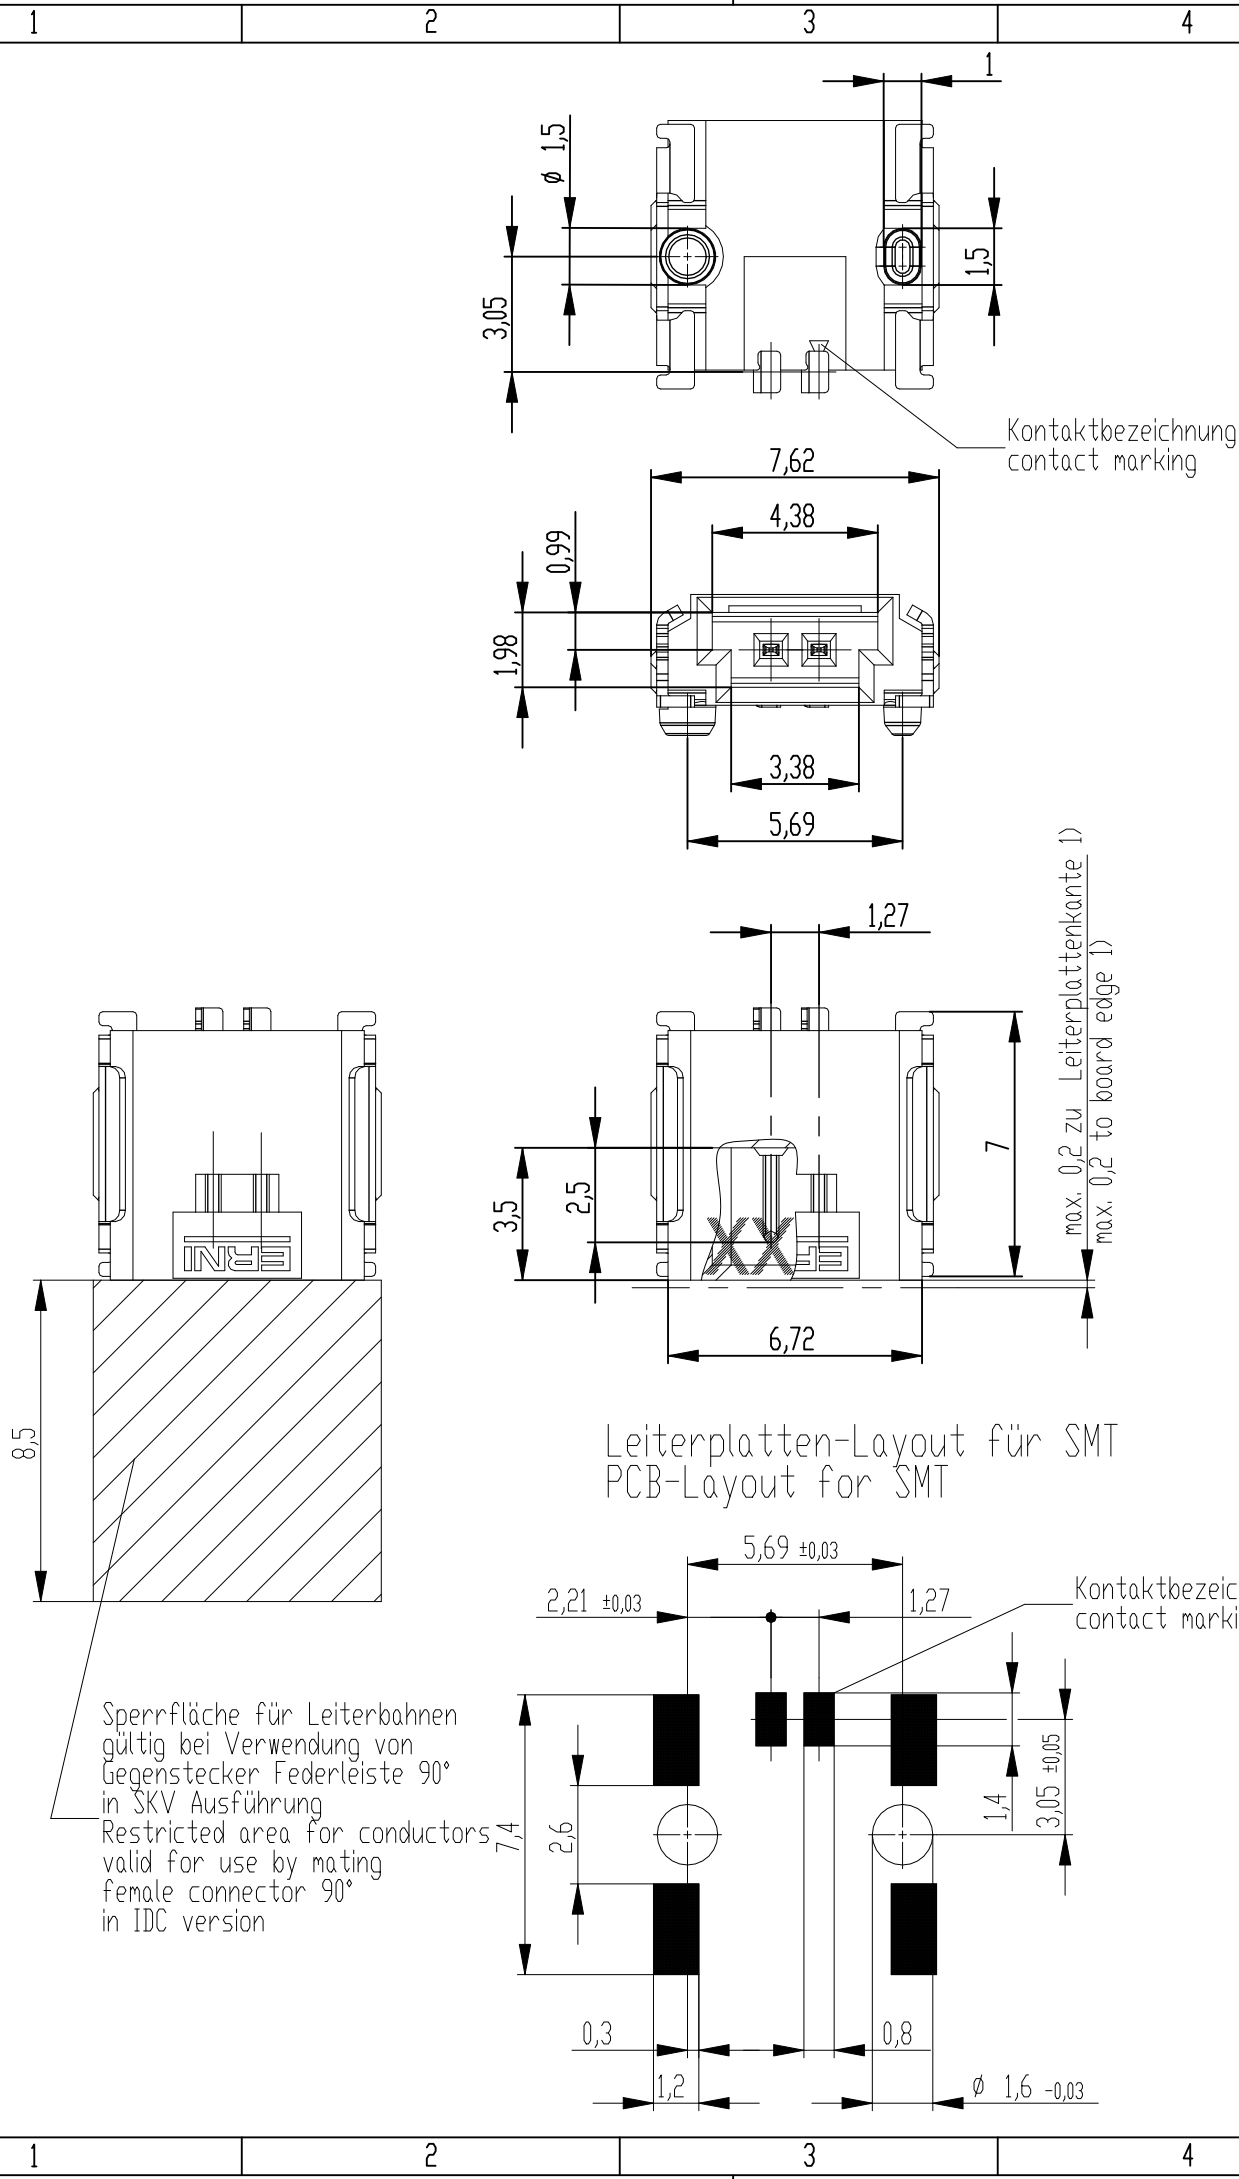

Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
tape on reel packaging according to DIN IEC 60286-3
Verpackungseinheit: 1000 Stück
packaging unit: 1000 pcs




Abspulrichtung - reel off direction

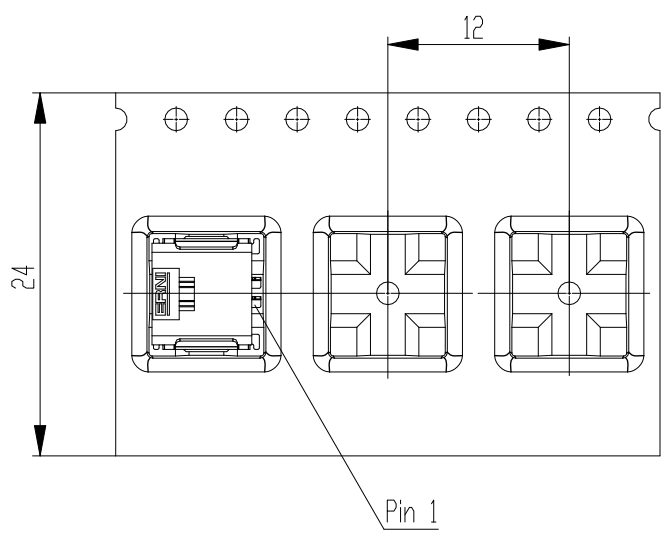

Anforderungsstufe 1
performance level 1
Kontaktbereich vergoldet
mating area gold plating
Anschlussbereich verzinkt 4-6 µm
terminal area 4-6 µm tin plating
Koplanarität der Anschlüsse ≤ 0,1 mm
coplanarity area of termination ≤ 0,1 mm

1) gültig bei Verwendung von Gegenstecker Federleiste 90° in SMD Ausführung
valid for use by mating female connector 90° in SMT version

Dimension no.				Tolerances Dim. for Information ISO 8015		 All Dimensions in mm		Scale 5:1		Material	
<u>Customer drawing:</u> THIS DRAWING IS A CONTROLLED DOCUMENT.				Subject to modification without prior notice. Drawing will not be updated.		 TE Connectivity		ERNI-MiniBridge Male Angeled SMT 02p			
								C- 214011-E			
I				10.03.2021				I			
Index				Date				A3			
Class								SRCA			