| REV | ECN NO | DESRIPTION | DESIGN | APPROVAL | DATE |
|---|---|---|---|---|---|
| A1 | NEW | Replace frame | | | 2020.06.12 |
| | | | | | |

ROHS

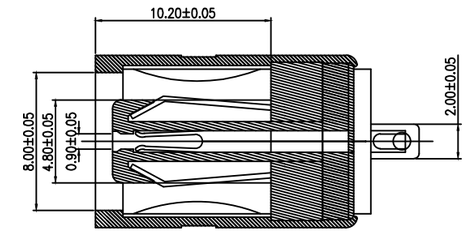





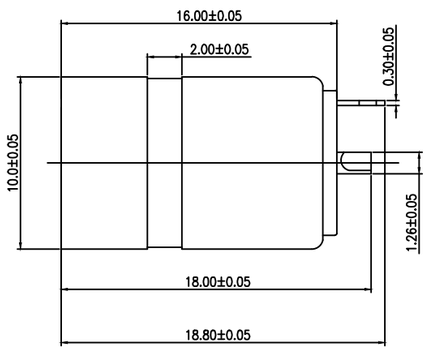


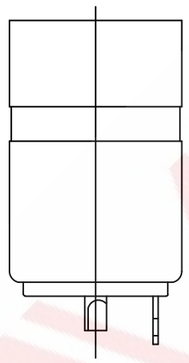

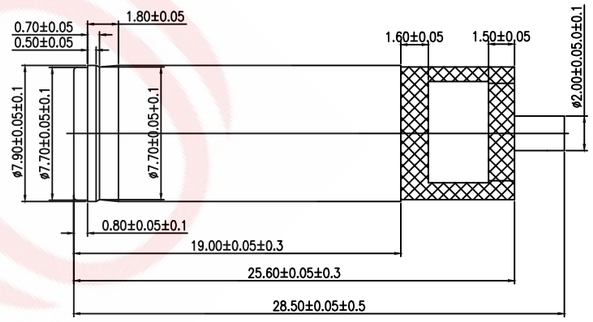


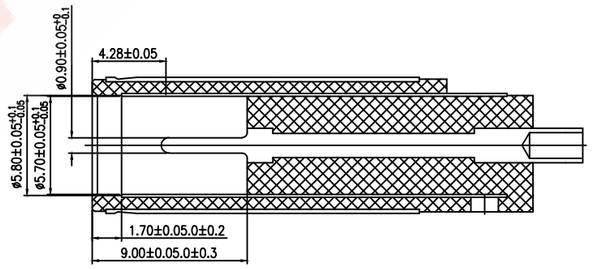


公头数据

9C H 2 160 B E K A

- Model Definition
- Mould Number: MX7909
- Needle Diameter: Core4.8 mm, Inner Hole 0.9 mm
- Fixing Method: Without Fixed Column
- Interface Method: Conventional Flared Opening
- Overall Length: 16.00 mm
- Pin Position: 2 Pin
- Mounting Method: Wire Welding
- Product Series: DC Power Jacks

## 主要技术性能

1. 额定电负荷： 20V 5A;
2. 绝 缘 电 阻：≥100MΩ;
3. 耐 压：AC500V(50Hz)/min;
4. 插 拔 力：3～25N;
5. 寿 命：5,000次。

| 序号 | 名 称 | 数量 | 材 料 | 备 注 |
|---|---|---|---|---|
| 4 | 中心针 | 1 | 黄铜 | 镀镍 |
| 3 | 塑料基座 | 1 | PBT | 黑色 |
| 2 | 端子 | 1 | 磷铜带 | 镀镍 |
| 1 | 外壳 | 1 | 黄铜 | 镀镍 |



| | | | | |
|---|---|---|---|---|
| | | | GENERAL TOLERANCE | |
| | | | ≥0~2< | ±0.15 |
| DESIGN | WANGGUIFA | 2018.06.12 | ≥2~5< | ±0.25 |
| CHECKED | ZHENGUILAN | 2018.06.12 | ≥0~2< | ±0.15 |
| APPROVED | LILIANJIANG | 2018.06.14 | ≥5 | ±0.35 |

FIRST VIEW



SCALE 1:1 UNIT mm

SAMZO COMPONENTS
Electronic switch and connector manufacturer

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
WWW.KKK-JP.COM

TITLE:: 大电流 焊线式 2P母座

DWG NO: 9CH2-A7909

PART NO: 9CH2-20227909

MODEL NO: 9CH2160BEKA

NAME: DC JACK