
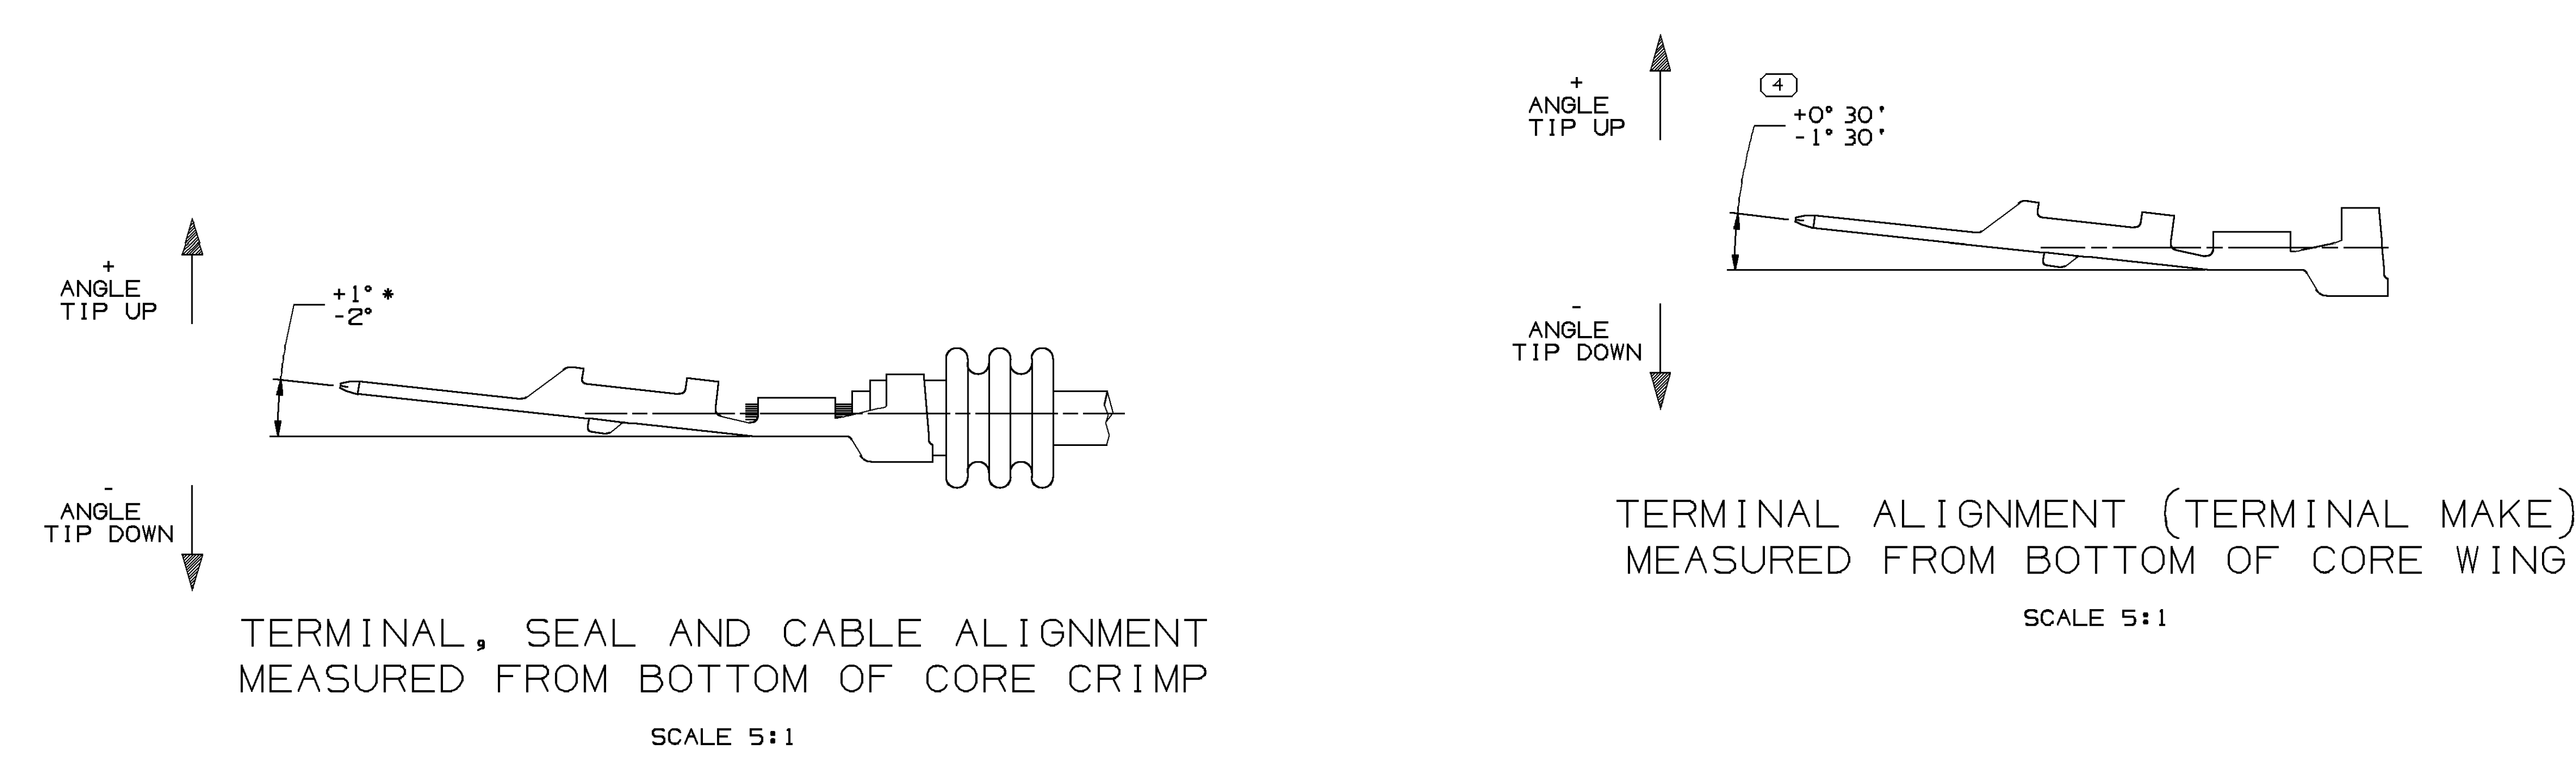
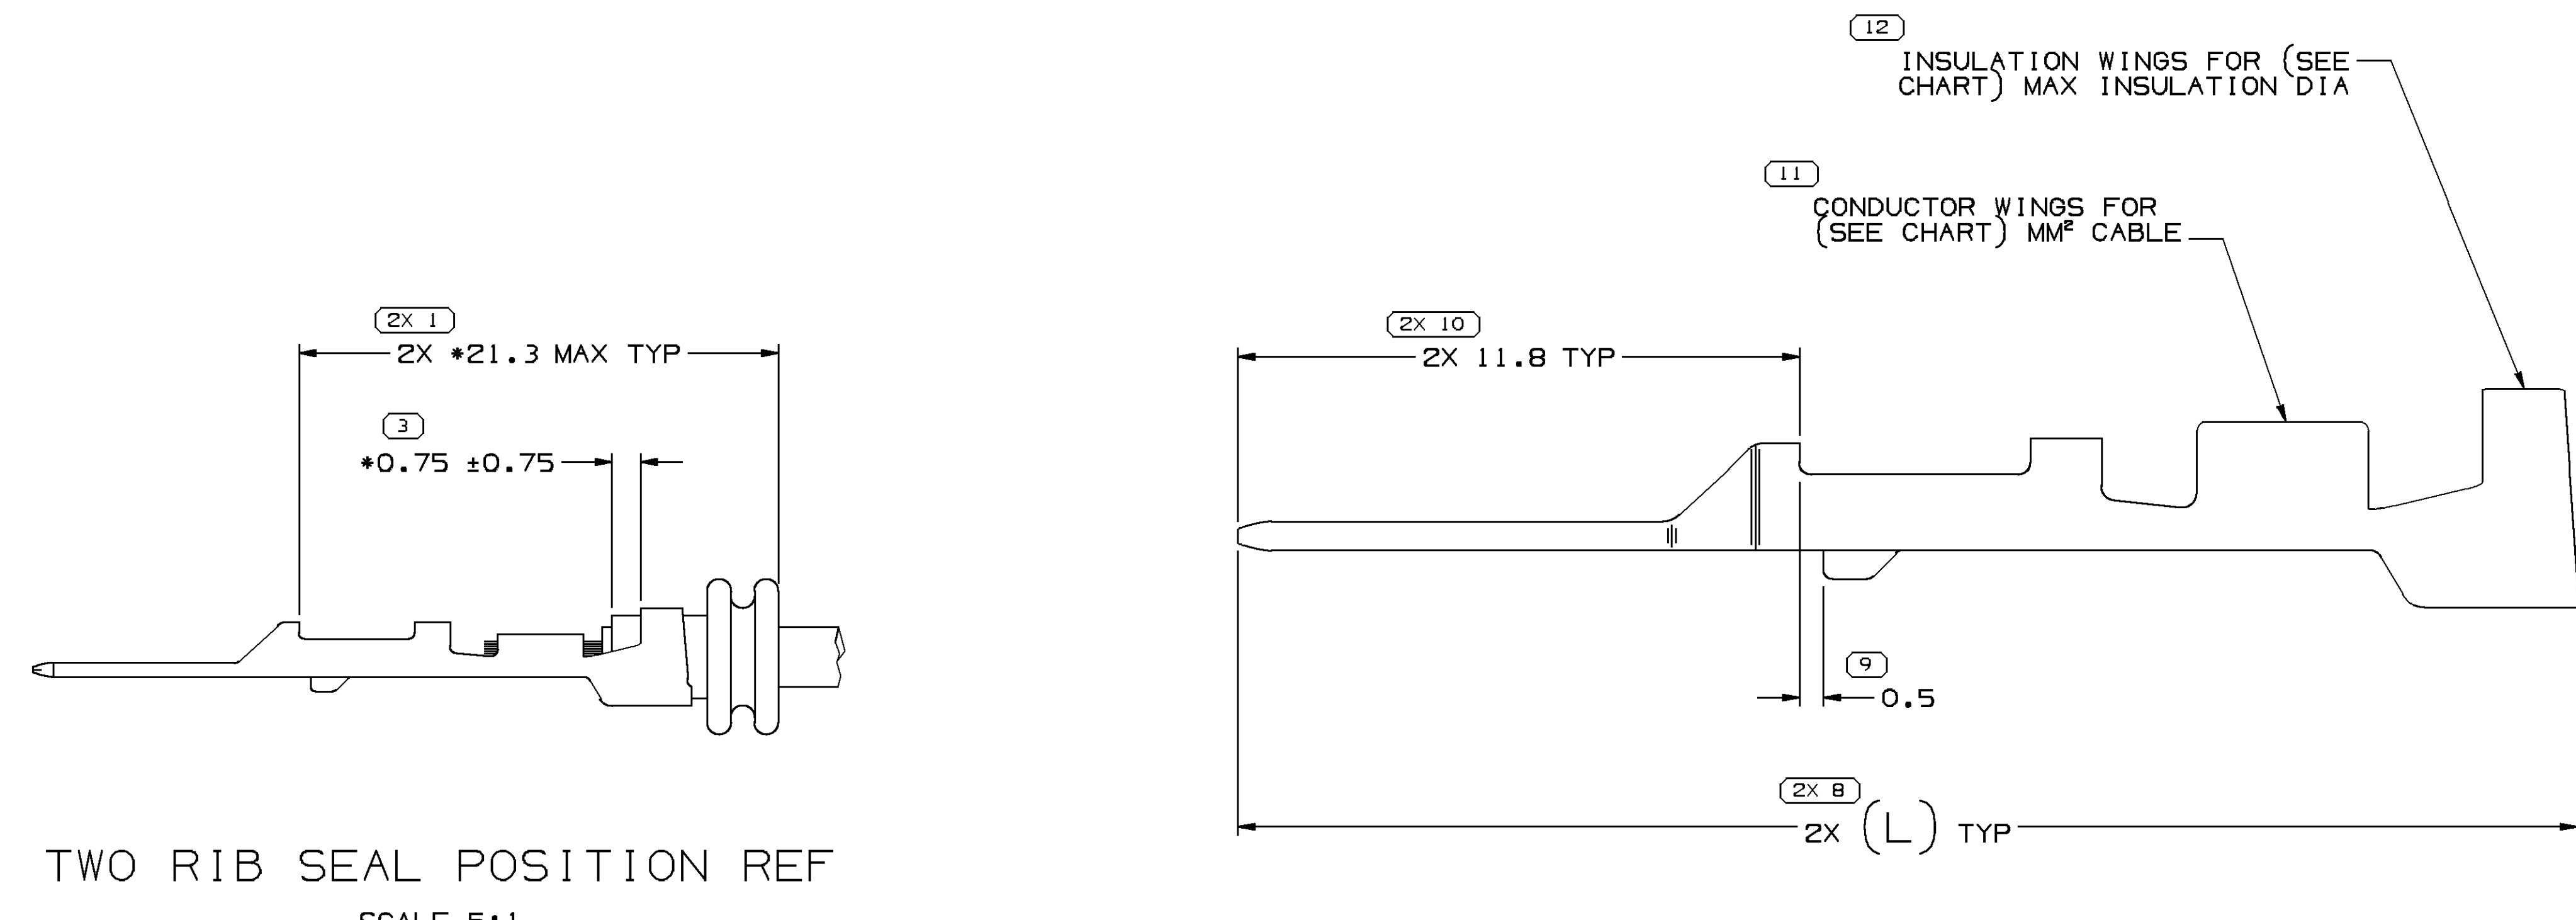



| SYMBOL DEFINITION                                                                                                                            |                                        |    |
|----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|----|
| A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL<br>DOES NOT REQUIRE INSPECTION. IT MAY BE<br>CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING. | TOTAL NO OF<br>INSPECTIONS<br>REQUIRED | 22 |
|                                                                                                                                              | LAST NO.<br>USED                       | 19 |

| CWS STATUS |     |     |     | ZONE | REVISION HISTORY                                                                                                     |  | AUTH   | DR  | APV/APVQ |
|------------|-----|-----|-----|------|----------------------------------------------------------------------------------------------------------------------|--|--------|-----|----------|
| DATE       | STG | REV | N/P |      |                                                                                                                      |  |        |     |          |
| 31JUL02    | R   | 05  | -   | -    | CLEARED REV COLUMN; RELEASED 15443663                                                                                |  | 228344 | CJP | CJP      |
| 170C02     | R   | 06  | -   | -    | ALL PARTS - UPDATED PDM ATTRIBUTES                                                                                   |  | 227307 | EV  | EV       |
| 25FE03     | R   | 07  | -   | -    | 15443663 - OBSOLETE                                                                                                  |  | 237063 | MAC | MAC      |
| 16AP03     | R   | 08  | -   | -    | ALL PARTS - ADDED APPLICATION, TYPICAL CABLE SEAL AND TYPICAL SEALING CAVITY CONFIG TO CHART                         |  | 239445 | TLD | EJH      |
| 20JUL03    | R   | 09  | -   | -    | 15326268, 15326269, 15355563, AND 15373413 - ADDED TERMINAL MAKE STRAIGHTNESS AND TERMINAL CRIMP STRAIGHTNESS VIEWS. |  | 242518 | BRB | BRB      |
| 01MR04     | R   | 10  | -   | -    | 15373413 - UPDATED PDM ATTRIBUTES                                                                                    |  | 252269 | EES | EES      |
| 040C04     | R   | 11  | -   | -    | 15326268 - 69, 15355563 & 15373413 - ADDED STAMP DIE I.D                                                             |  | 259308 | OPS | JVM      |
| 22SE08     | R   | 12  | -   | -    | 13722265 & 13722267 - RELEASED                                                                                       |  | 406110 | JOA | FKV      |
| 01DE08     | R   | 13  | -   | -    | 15326268, 15326269, 15355563, 15373413 - UPDATED MATERIAL CALLOUT                                                    |  | 406833 | MH  | PYP      |
| 18MR09     | R   | 14  | -   | -    | 13722265 & 13722267 - UPDATED PDM ATTRIBUTES                                                                         |  | 407578 | LVR | FKV      |
| 160C09     | R   | 15  | -   | -    | 13722265 & 13722267 - ADDED LABEL OF SILVER PLATING ZONE                                                             |  | 409243 | FKV | FKV      |
| 29MR10     | R   | 16  | -   | -    | ALL ACTIVE PARTS - UPDATED PDM ATTRIBUTES                                                                            |  | 410409 | FRE | FRE      |
| 16AU10     | R   | 17  | -   | -    | ALL ACTIVE PARTS - ADDED PLATING NOTE, UPDATED MAT'L CALLOUT AND ADDED CONTACT AREA & CRIMP AREA COLUMNS ON CHART    |  | 411632 | JRL | JRL      |
| 060C10     | R   | 18  | -   | -    | ALL ACTIVE PARTS - UPDATED PLATING NOTES                                                                             |  | 412129 | CBG | CBG      |
| 23AU11     | R   | 19  | -   | -    | ALL ACTIVE PARTS - ALTERNATIVE MAT'L SIZE WAS MAT'L SIZE AND ADDED PREFERRED MAT'L SIZE COLUMN                       |  | 415183 | AGM | JVM      |
| 28SE11     | R   | 20  | -   | -    | 13722265-67 - ALTERNATIVE MAT'L SIZE WAS 0.3 X 35.75 AND PREFERRED MAT'L SIZE WAS EMPTY                              |  | 415603 | BLG | BLG      |
| 160C14     | R   | 21  | -   | -    | 13722265 & 13722267 - REVISED NOTE 11 ABOUT "TARNISH INFO" IN PLATING TYPE                                           |  | 427927 | ABH | JVM      |

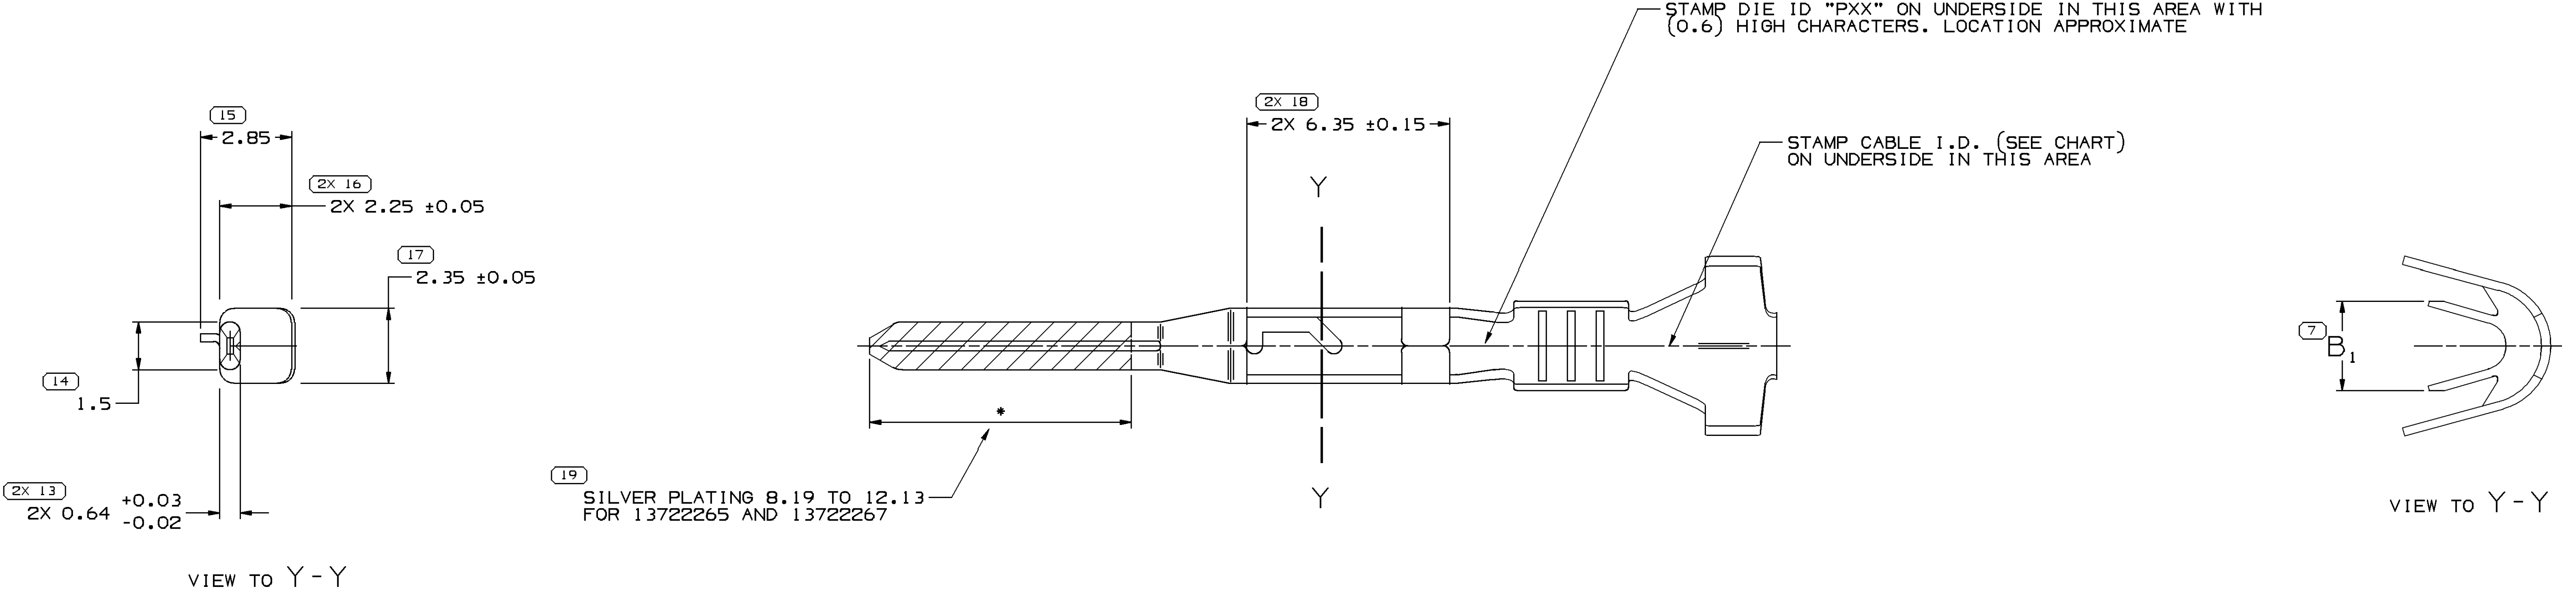

- NOTES
- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
  - REFERENCE MATING COMPONENTS OR EQUIVALENT: TERMINAL 12191818
  - \* DENOTES DIMENSIONS MADE AT CUT OFF AND CRIMP DIE.
  - PLATING TYPE:
    - REFLOW TIN 1.9-3.3 MICROMETERS THICK WITH A COPPER UNDERPLATE 0.5 MICROMETER TO 1.0 MICROMETER THICK.
    - SILVER 3.5-6.0 MICROMETERS THICK OVER 0.13-0.25 MICROMETERS THICK NICKEL UNDERPLATE.
    - FOR TERMINALS PACKAGED & STORED IN THE APPROVED MANNER, TARNISH ON SILVER PLATED SURFACES WILL NOT AFFECT THE PERFORMANCE OF THE PART.
    - MATE TIN ELECTROPLATE 1.9-7.0 MICROMETERS THICK WITH A NICKEL UNDERPLATE 0.13-0.25 MICROMETERS THICK.
- PLATING TYPE INFORMATION SHOWN ABOVE IS REFERENCE ONLY. PLATING REQUIREMENTS ARE CONTAINED IN APPLICABLE MATERIAL SPECIFICATION.

|          |     |     |                      |                        |                        |            |    |                 |       |      |                     |               |                        |                    |                                      |                                        |                                      |
|----------|-----|-----|----------------------|------------------------|------------------------|------------|----|-----------------|-------|------|---------------------|---------------|------------------------|--------------------|--------------------------------------|----------------------------------------|--------------------------------------|
| 13722267 | 01  | AH  | 0.3 X 35.75          | -                      | A6 PLATED COPPER ALLOY | 0.35 - 0.5 | 21 | 1.85 - 1.2±0.15 | 201   | 2.1  | 28.15               | SEALED (6T)   | 12191226 OR EQUIVALENT | Ø 4 ROUND          | 11                                   | 111                                    |                                      |
| 13722265 | 01  | AH  | 0.3 X 35.75          | -                      | A6 PLATED COPPER ALLOY | 0.75 - 1   | 17 | 2.25 - 1.7±0.15 | 201   | 2.65 | 28.15               | SEALED (6T)   | 12191227 OR EQUIVALENT | Ø 4 ROUND          | 11                                   | 111                                    |                                      |
| 15443663 | 01  | AC  | -                    | 0.3 X 36.12            | -                      | 0.75 - 0.8 | 19 | 2.02 - 1.7      | 201   | 2.65 | 28.15               | SEALED (MINI) | 15305351 OR EQUIVALENT | 3.2 X 4 OVAL       | -                                    | -                                      |                                      |
| 15373413 | 01  | AM  | 0.3 X 35.75          | 0.3 X 36.12            | COPPER ALLOY           | 0.75 - 0.8 | 18 | 2.02 - 1.7      | 201   | 2.65 | 28.15               | SEALED (MINI) | 15305351 OR EQUIVALENT | 3.2 X 4 OVAL       | 1                                    | 1                                      |                                      |
| 15355563 | 01  | AL  | 0.3 X 35.75          | 0.3 X 36.12            | COPPER ALLOY           | 0.35 - 0.5 | 21 | 1.85 - 1.2      | 201   | 2.1  | 28.15               | SEALED (MINI) | 12191229 OR EQUIVALENT | 3.2 X 4 OVAL       | 1                                    | 1                                      |                                      |
| 15326269 | 02  | AK  | 0.3 X 35.75          | 0.3 X 36.12            | COPPER ALLOY           | 0.75 - 1   | 17 | 2.25 - 1.7±0.15 | 201   | 2.65 | 28.15               | SEALED (6T)   | 12191227 OR EQUIVALENT | Ø 4 ROUND          | 1                                    | 1                                      |                                      |
| 15326268 | 02  | AK  | 0.3 X 35.75          | 0.3 X 36.12            | COPPER ALLOY           | 0.35 - 0.5 | 21 | 1.85 - 1.2±0.15 | 201   | 2.1  | 28.15               | SEALED (6T)   | 12191226 OR EQUIVALENT | Ø 4 ROUND          | 1                                    | 1                                      |                                      |
| PART NO  | REV | N/P | PREFERRED MAT'L SIZE | ALTERNATIVE MAT'L SIZE | MAT'L DESCRIPTION      | SIZE (MM²) | ID | DIA             | CABLE | TYPE | B <sub>1</sub> ±0.2 | (L)           | APPLICATION            | TYPICAL CABLE SEAL | TYPICAL SEALING CAVITY CONFIGURATION | CONTACT AREA PLATING TYPE SEE NOTE (4) | CRIMP AREA PLATING TYPE SEE NOTE (4) |

|                                                                                                  |         |                                   |                                                                                                                        |
|--------------------------------------------------------------------------------------------------|---------|-----------------------------------|------------------------------------------------------------------------------------------------------------------------|
| 10 PROCESS SENSITIVE DIMENSION                                                                   |         | ALL DIMENSIONS ARE IN MILLIMETERS |                                                                                                                        |
| DIMENSIONS ENCLOSED IN ( ) INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED |         | REFERENCE                         |                                                                                                                        |
| DIMENSIONAL RANGE (MM)                                                                           | CHART D | THIRD ANGLE PROJECTION            | DO NOT SCALE<br>USE MATH DATA<br> |
| FROM 0 TO 10                                                                                     | > 10    |                                   |                                                                                                                        |
| TOLERANCE UNLESS OTHERWISE SPECIFIED                                                             |         |                                   |                                                                                                                        |
| ANGULAR TOLERANCE 12°                                                                            |         |                                   |                                                                                                                        |

**DELPHI**  
DELPHI PACKARD ELECTRICAL/ELECTRONIC ARCHITECTURE  
WARREN, OH  
COPYRIGHT 1997 DELPHI CORPORATION AND/OR ITS AFFILIATES. ALL RIGHTS RESERVED.  
THIS DRAWING IS THE PROPERTY OF DELPHI CORPORATION AND CONTAINS DELPHI CONFIDENTIAL INFORMATION. THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT OR ITS CONTENTS OR DATA, WITHOUT EXPRESS AUTHORIZATION, IS PROHIBITED.

|                                                                 |        |
|-----------------------------------------------------------------|--------|
| DATE                                                            |        |
| OR                                                              |        |
| APV01 H. CASTRILLON                                             | 18AP97 |
| APV02 PEDRO YABUR                                               | 24AP97 |
| APV03 S.C. HSIEH                                                | 12MY97 |
| APV04                                                           |        |
| APV05                                                           |        |
| SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI (0944900) |        |
| DRAWING NUMBER                                                  |        |
| TAXI TERM M GT 150 SEALED                                       |        |
| DRAWING NUMBER                                                  |        |
| 15304703                                                        |        |
| SIZE                                                            | SCALE  |
| A0                                                              | 10:1   |
| FRAME NO                                                        | 1 OF 1 |
| SHEET NO                                                        | 2 OF 2 |
| STG                                                             | REV    |
| R                                                               | 21     |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Delphi Connection Systems:](#)

[15326269-L](#) [15326269](#) [15326268-MR](#) [15326269-MR](#)