

G-INSEC-PG13,5-S68N-NNES-S - Cable gland



1411198

<https://www.phoenixcontact.com/us/products/1411198>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable gland, material for screw connection: Brass, nickel-plated, application: EMC, external cable diameter 6 mm ... 12 mm, shielding: yes, connecting thread: Pg13.5, color: silver, with O-ring

Commercial data

Item number	1411198
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	BF68
Product key	BF7DBX
Catalog page	Page 691 (C-2-2019)
GTIN	4046356923293
Weight per piece (including packing)	31.55 g
Weight per piece (excluding packing)	22.22 g
Customs tariff number	74198090
Country of origin	TR

G-INSEC-PG13,5-S68N-NNES-S - Cable gland



1411198

<https://www.phoenixcontact.com/us/products/1411198>

Technical data

Mounting

Assembly note	1) Mount screw connection flange in the housing using the correct torque 2) Insert cable 3) Tighten union nut using the correct torque
	Method 1 Cut the outer sheath, but do not remove it. Feed the cable through the screw connection and then remove the outer sheath. Now pull the cable back until the connection is established between the cable shield and the contact spring.
	Method 2 Push the braided shield back around 15 ... 20 mm over the outer sheath. Insert the cables into the screw connection until the connection is established between the cable shield and the contact spring.


Product properties

Product type	Cable screw gland
Application	EMC
No. of conductors	1
Manufacturer	BIMED
Manufacturer Designation	BSEM-04
Shielded	yes

Characteristics

Cable diameter without cable sheath	5 mm (Diameter of braided shield)
-------------------------------------	-----------------------------------

Dimensions

Dimensional drawing	
Length	30 mm
Length of the connecting thread	6.5 mm
Hole diameter	20.5 mm ... 20.7 mm
Wrench size, union nut	22 mm
Wrench size, support	22 mm
Hexagon angular dimension	24.5 mm
Thread type connection side	Pg13.5

Connection data

Tightening torque	8 Nm (Union nut: EN 62444)
	5.5 Nm (Support: EN 62444)

G-INSEC-PG13,5-S68N-NNES-S - Cable gland



1411198

<https://www.phoenixcontact.com/us/products/1411198>

Material specifications

Color	Brass
Material Compression ring	PA 6
Seal material O-ring	Perbunan
Seal material Cable seal	CR
Material for screw connection	Brass, nickel-plated

Cable/line

External cable diameter Cable 1	6 mm ... 12 mm
Halogen-free	no

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP68
Ambient temperature (operation)	-40 °C ... 100 °C (static)

G-INSEC-PG13,5-S68N-NNES-S - Cable gland


1411198

<https://www.phoenixcontact.com/us/products/1411198>




Drawings

Dimensional drawing

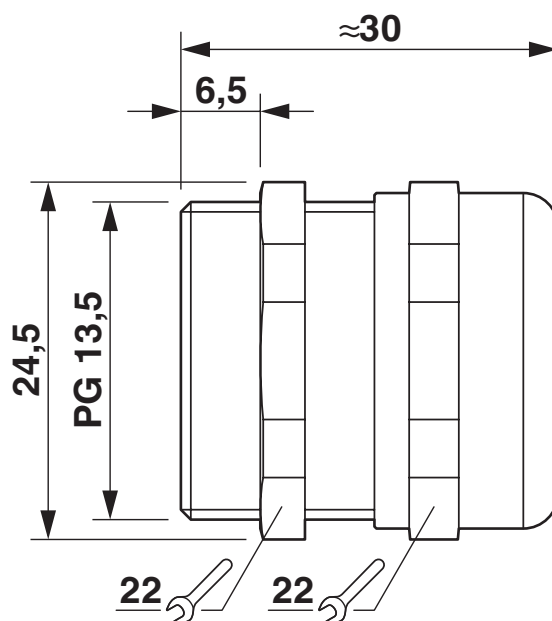

Dimensional drawing

Functional drawing

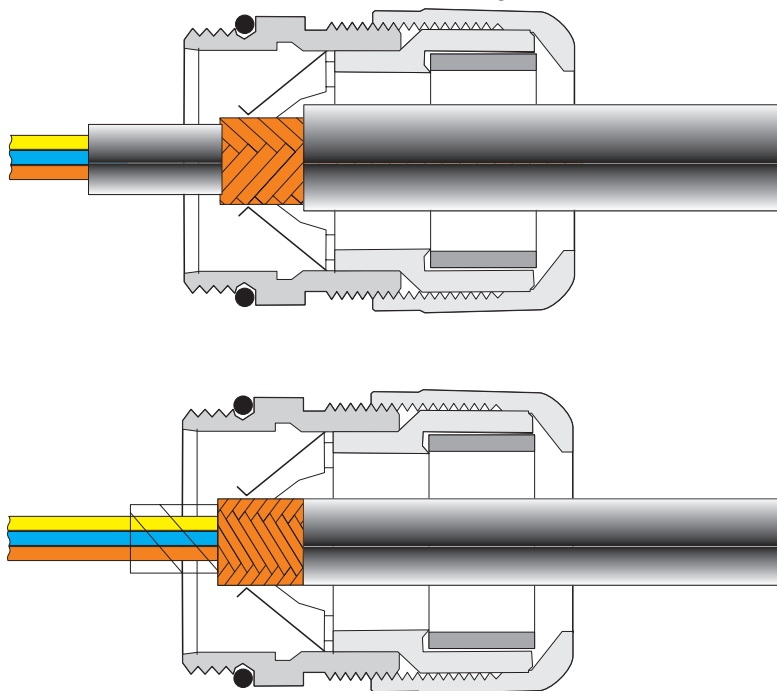

See assembly instruction

G-INSEC-PG13,5-S68N-NNES-S - Cable gland



1411198

<https://www.phoenixcontact.com/us/products/1411198>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1411198>

DNV

Approval ID: TAE00003WY

G-INSEC-PG13,5-S68N-NNES-S - Cable gland



1411198

<https://www.phoenixcontact.com/us/products/1411198>

Classifications

ECLASS

ECLASS-11.0	27144432
ECLASS-12.0	27140801
ECLASS-13.0	27140801

ETIM

ETIM 9.0	EC000441
----------	----------

UNSPSC

UNSPSC 21.0	39121300
-------------	----------

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	eabb84bd-cfee-442f-8969-4f479f7a87f3

G-INSEC-PG13,5-S68N-NNES-S - Cable gland

1411198

<https://www.phoenixcontact.com/us/products/1411198>



Accessories

A-INLE-PG13,5-N-S - EMC nut

1411278

<https://www.phoenixcontact.com/us/products/1411278>

EMC nut, for threads Pg13.5, color: silver



SEALING PLUG 9X16 RD - Closing cap

1400259

<https://www.phoenixcontact.com/us/products/1400259>

Closing cap, color: red



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com