

Description

The SX70P03DF uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with gate voltages as low as 4.5V. This device is suitable for use as a Battery protection or in other Switching application.

General Features

$V_{DS} = -30V$ $I_D = -70A$

$R_{DS(ON)} < 8.0m\Omega$ @ $V_{GS} = -10V$



Application

Lithium battery protection

Wireless impact

Mobile phone fast charging

PDFN3*3-8L

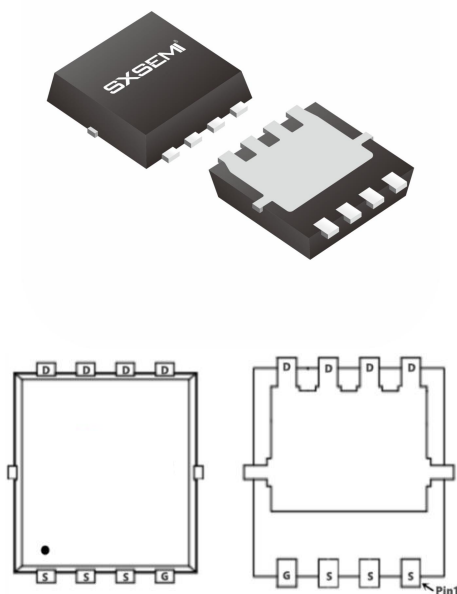

Absolute Maximum Ratings (TC=25°C unless otherwise noted)

Symbol	Parameter	Rating	Units
VDS	Drain-Source Voltage	-30	V
VGS	Gate-Source Voltage	±20	V
ID@TC=25°C	Continuous Drain Current, VGS @ -10V1	-70	A
ID@TC=100°C	Continuous Drain Current, VGS @ -10V1	-57	A
IDM	Pulsed Drain Current2	-200	A
EAS	Single Pulse Avalanche Energy3	125	mJ
IAS	Avalanche Current	-40	A
PD@TC=25°C	Total Power Dissipation4	69	W
TSTG	Storage Temperature Range	-55 to 150	°C
TJ	Operating Junction Temperature Range	-55 to 150	°C
RθJA	Thermal Resistance Junction-Ambient 1	85	°C/W
RθJC	Thermal Resistance Junction-Case1	1.6	°C/W

Electrical Characteristics (T_J=25 °C, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =-250uA	-30	-34	---	V
$\Delta BV_{DSS}/\Delta T_J$	BVDSS Temperature Coefficient	Reference to 25°C , I _D =-1mA	---	-0.0232	---	V/°C
RDS(ON)	Static Drain-Source On-Resistance	V _{GS} =-10V , I _D =-20A	---	5.8	8.0	mΩ
		V _{GS} =-4.5V , I _D =-15A	---	8.0	11	
V _{GS(th)}	Gate Threshold Voltage	V _{GS} =V _{DS} , I _D =-250uA	-1.2	-1.4	-2.5	V
$\Delta V_{GS(th)}$	V _{GS(th)} Temperature Coefficient		---	4.6	---	mV/°C
I _{DSS}	Drain-Source Leakage Current	V _{DS} =-24V , V _{GS} =0V , T _J =25°C	---	---	-1	uA
		V _{DS} =-24V , V _{GS} =0V , T _J =55°C	---	---	-5	
I _{GSS}	Gate-Source Leakage Current	V _{GS} =±20V , V _{DS} =0V	---	---	±100	nA
g _{fs}	Forward Transconductance	V _{DS} =-5V , I _D =-30A	---	30	---	S
R _g	Gate Resistance	V _{DS} =0V , V _{GS} =0V , f=1MHz	---	9.8	---	Ω
Q _g	Total Gate Charge (-4.5V)	V _{DS} =-15V , V _{GS} =-4.5V I _D =-20A	---	35	---	nC
Q _{gs}	Gate-Source Charge		---	9.9	---	
Q _{gd}	Gate-Drain Charge		---	10.5	---	
T _{d(on)}	Turn-On Delay Time	V _{DD} =-15V , V _{GS} =-10V , R _G =3.0Ω I _D =-20A	---	10.8	---	ns
T _r	Rise Time		---	13.2	---	
T _{d(off)}	Turn-Off Delay Time		---	73	---	
T _f	Fall Time		---	35	---	
C _{iss}	Input Capacitance	V _{DS} =-15V , V _{GS} =0V , f=1MHz	---	3520	---	pF
C _{oss}	Output Capacitance		---	465	---	
C _{rss}	Reverse Transfer Capacitance		---	370	---	
I _S	Continuous Source Current	V _G =V _D =0V , Force Current	---	---	-70	A
I _{SM}	Pulsed Source Current		---	---	-130	A
V _{SD}	Diode Forward Voltage	V _{GS} =0V , I _S =-1A , T _J =25°C	---	---	-1.3	V
t _{rr}	Reverse Recovery Time	I _F =-20A , dI/dt=100A/μs , T _J =25°C	---	25	---	nS
Q _{rr}	Reverse Recovery Charge		---	10	---	nC

Note :

- 1、The data tested by surface mounted on a 1 inch 2 FR-4 board with 2OZ copper.
- 2、The data tested by pulsed , pulse width .The EAS data shows Max. rating .
- 3、The power dissipation is limited by 175°C junction temperature
- 4、EAS condition: T_J=25°C , V_{DD}= -24V, V_G= -10V, R_G=7Ω, L=0.1mH, I_{AS}= -40A
- 5、The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

Typical Characteristics

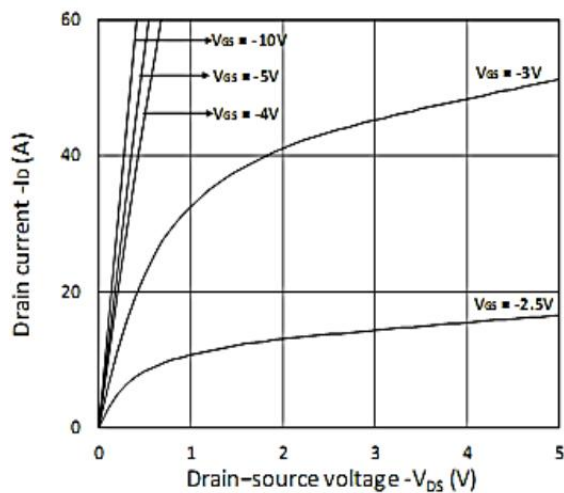


Figure 1. Output Characteristics

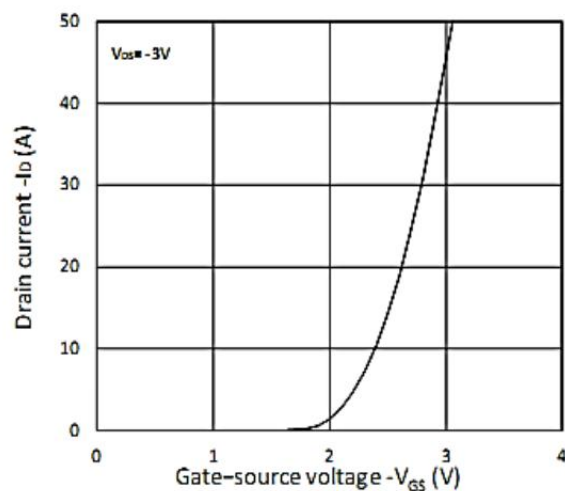


Figure 2. Transfer Characteristics

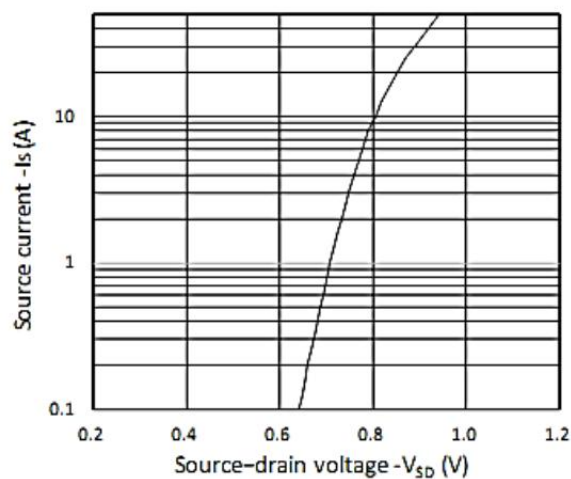


Figure 3. Forward Characteristics of Reverse

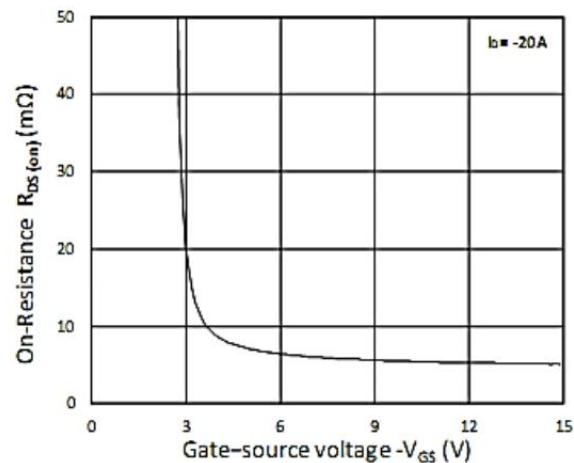


Figure 4. $R_{DS(on)}$ vs. V_{GS}

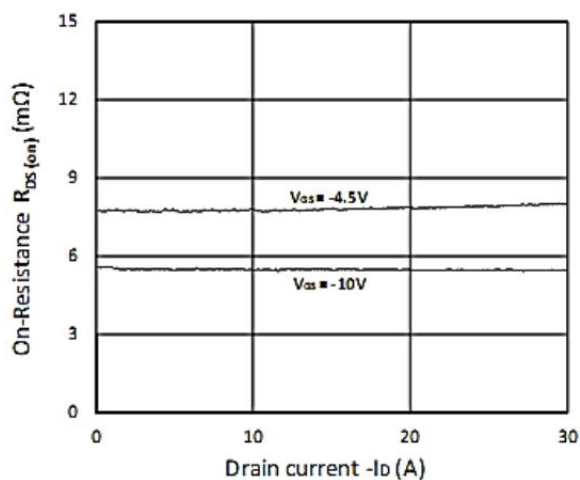


Figure 5. $R_{DS(on)}$ vs. I_D

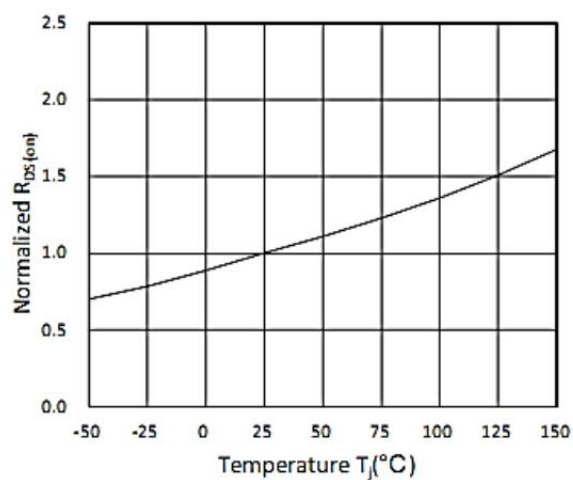


Figure 6. Normalized $R_{DS(on)}$ vs. Temperature

Typical Characteristics

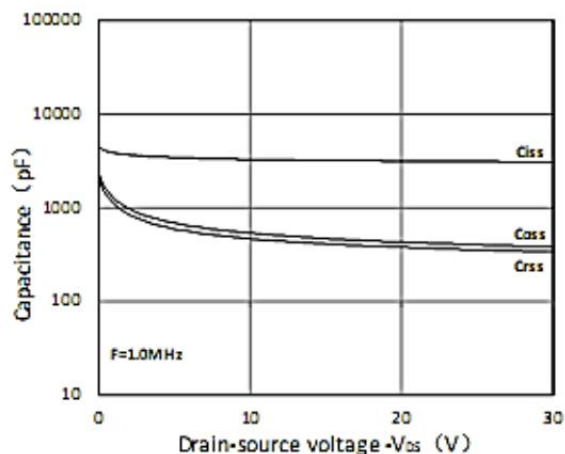


Figure 7. Capacitance Characteristics

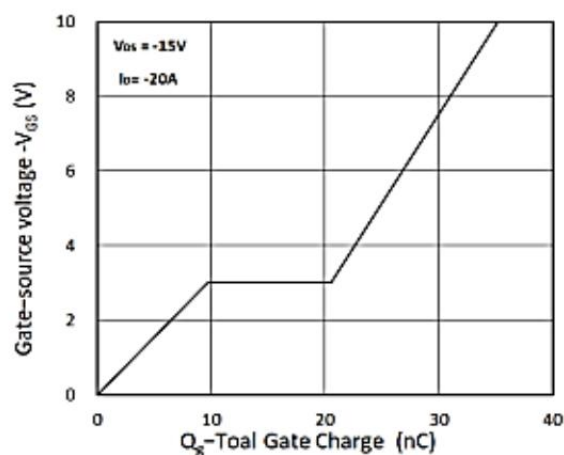


Figure 8. Gate Charge Characteristics

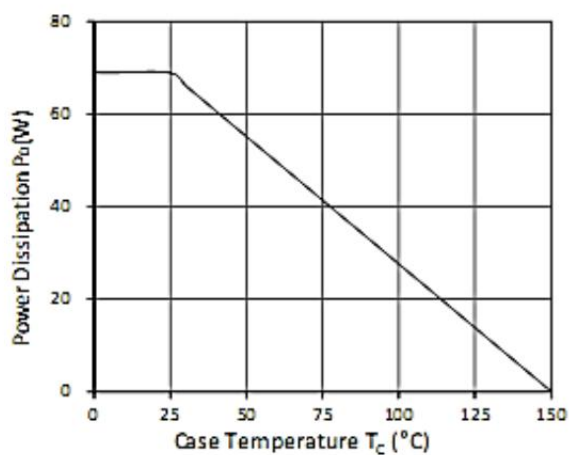


Figure 9. Power Dissipation

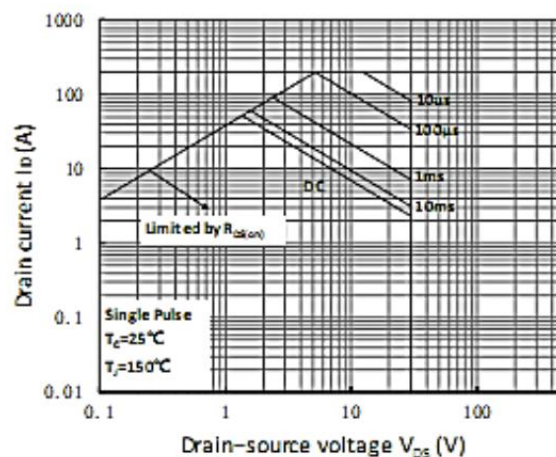


Figure 10. Safe Operating Area


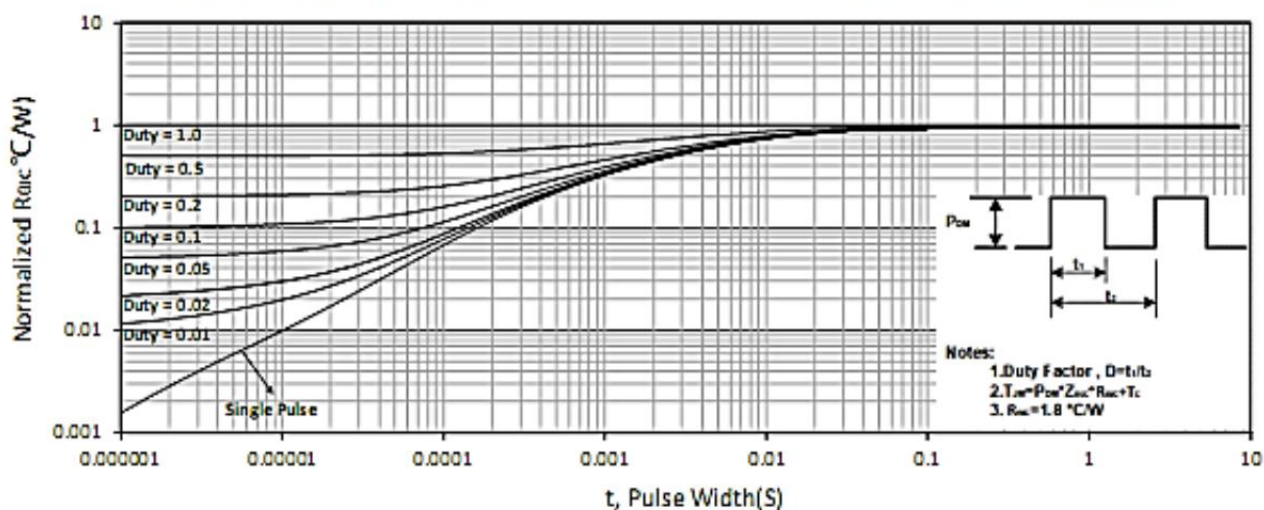


Figure 11. Normalized Maximum Transient Thermal Impedance

Package Mechanical Data-PDFN3*3-8L-JQ Single

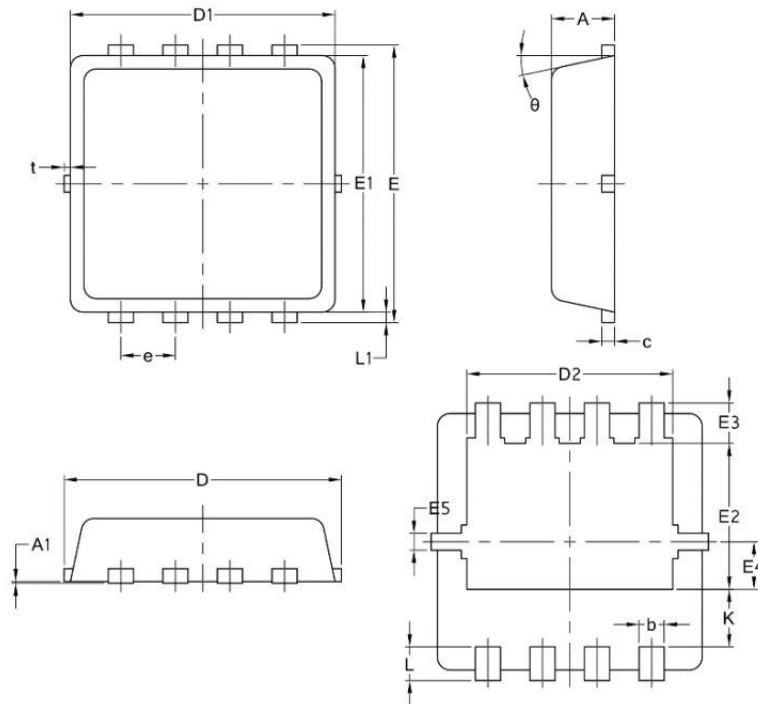

Symbol	Common		
	mm		
	Mim	Nom	Max
A	0.70	0.75	0.85
A1	/	/	0.05
b	0.20	0.30	0.40
c	0.10	0.152	0.25
D	3.15	3.30	3.45
D1	3.00	3.15	3.25
D2	2.29	2.45	2.65
E	3.15	3.30	3.45
E1	2.90	3.05	3.20
E2	1.54	1.74	1.94
E3	0.28	0.48	0.65
E4	0.37	0.57	0.77
E5	0.10	0.20	0.30
e	0.60	0.65	0.70
K	0.59	0.69	0.89
L	0.30	0.40	0.50
L1	0.06	0.125	0.20
t	0	0.075	0.13
Φ	10	12	14

Package Marking and Ordering Information

Product ID	Pack	Marking	Qty(PCS)
TAPING	PDFN3*3-8L		5000