


Capacitor, tantalum, 0.33 uF, 3216, +/-10% Tol, 35V@85C

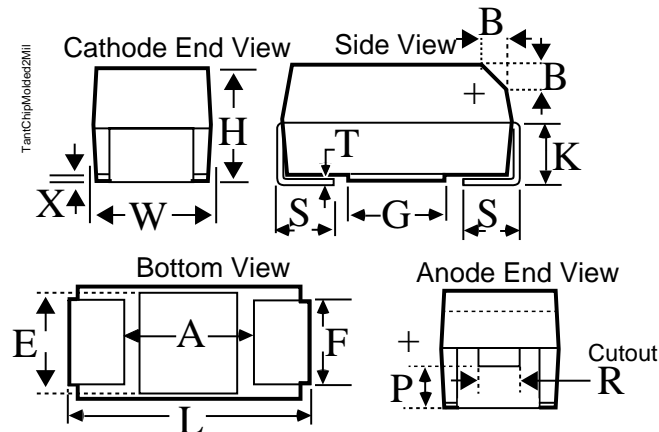

Cutout at KEMET's option (either end);
 see note about P and R dimensions and cutout.

Dimensions (mm)

Specifications

ID	Dimension	Tolerance	Manufacturer:	KEMET
L	3.2	+/-0.2	Capacitance:	0.33 uF
W	1.6	+/-0.2	Voltage DC @ 85C:	35V
H	1.6	+/-0.2	Voltage DC @ 105C:	29V
K	0.9	+/-0.2	Voltage DC @ 125C:	23V
F	1.2	+/-0.1	Tolerance:	+/-10%
S	0.8	+/-0.3	Application:	General Purpose
B	0.4	+/-0.15	Body Type:	Molded Chip
X	0.1	ref	Temperature Range:	-55/+125C
P	0.4	ref	Footprint:	3216
R	0.4	ref	Termination:	Tin
T	0.13	ref	Leakage Current:	0.5 uA
A	0.8	ref	Dissipation Factor:	4%
G	1.1	ref	Impedance @ 100kHz:	15 Ohm
E	1.3	ref	Package Kind:	T&R
			Package Quantity:	9000
			Miscellaneous Electrical:	Closest Kemet Original Series Equivalent: T491A334K035AT7280

Notes:

-A