
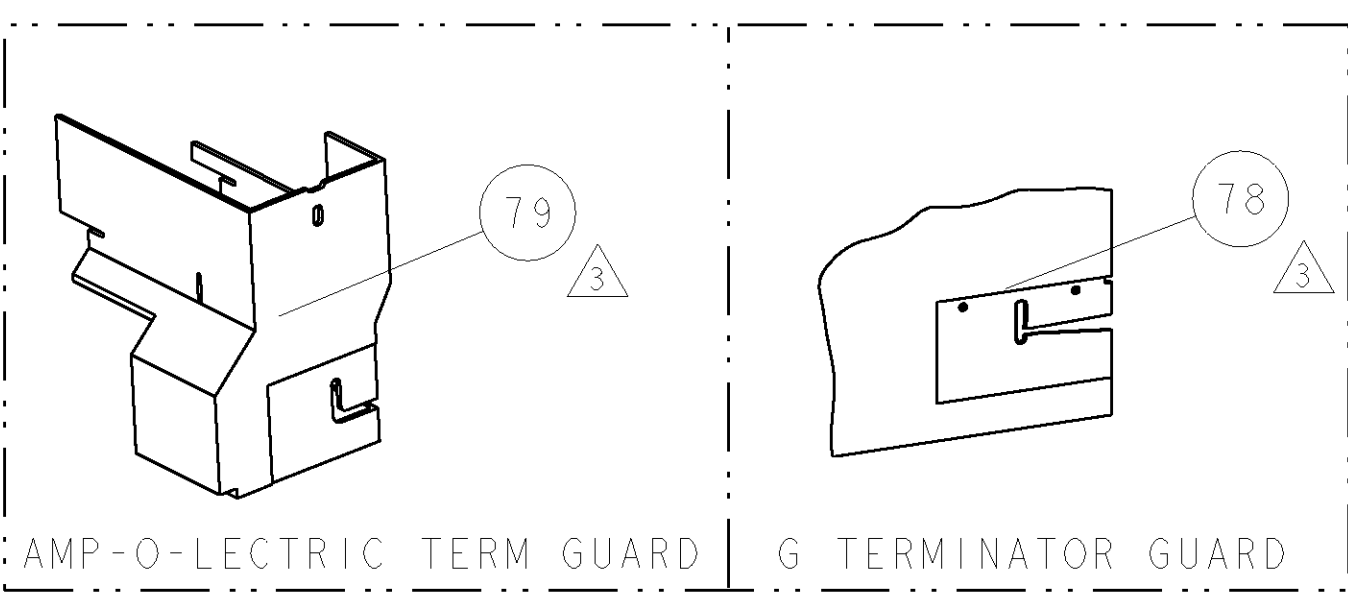
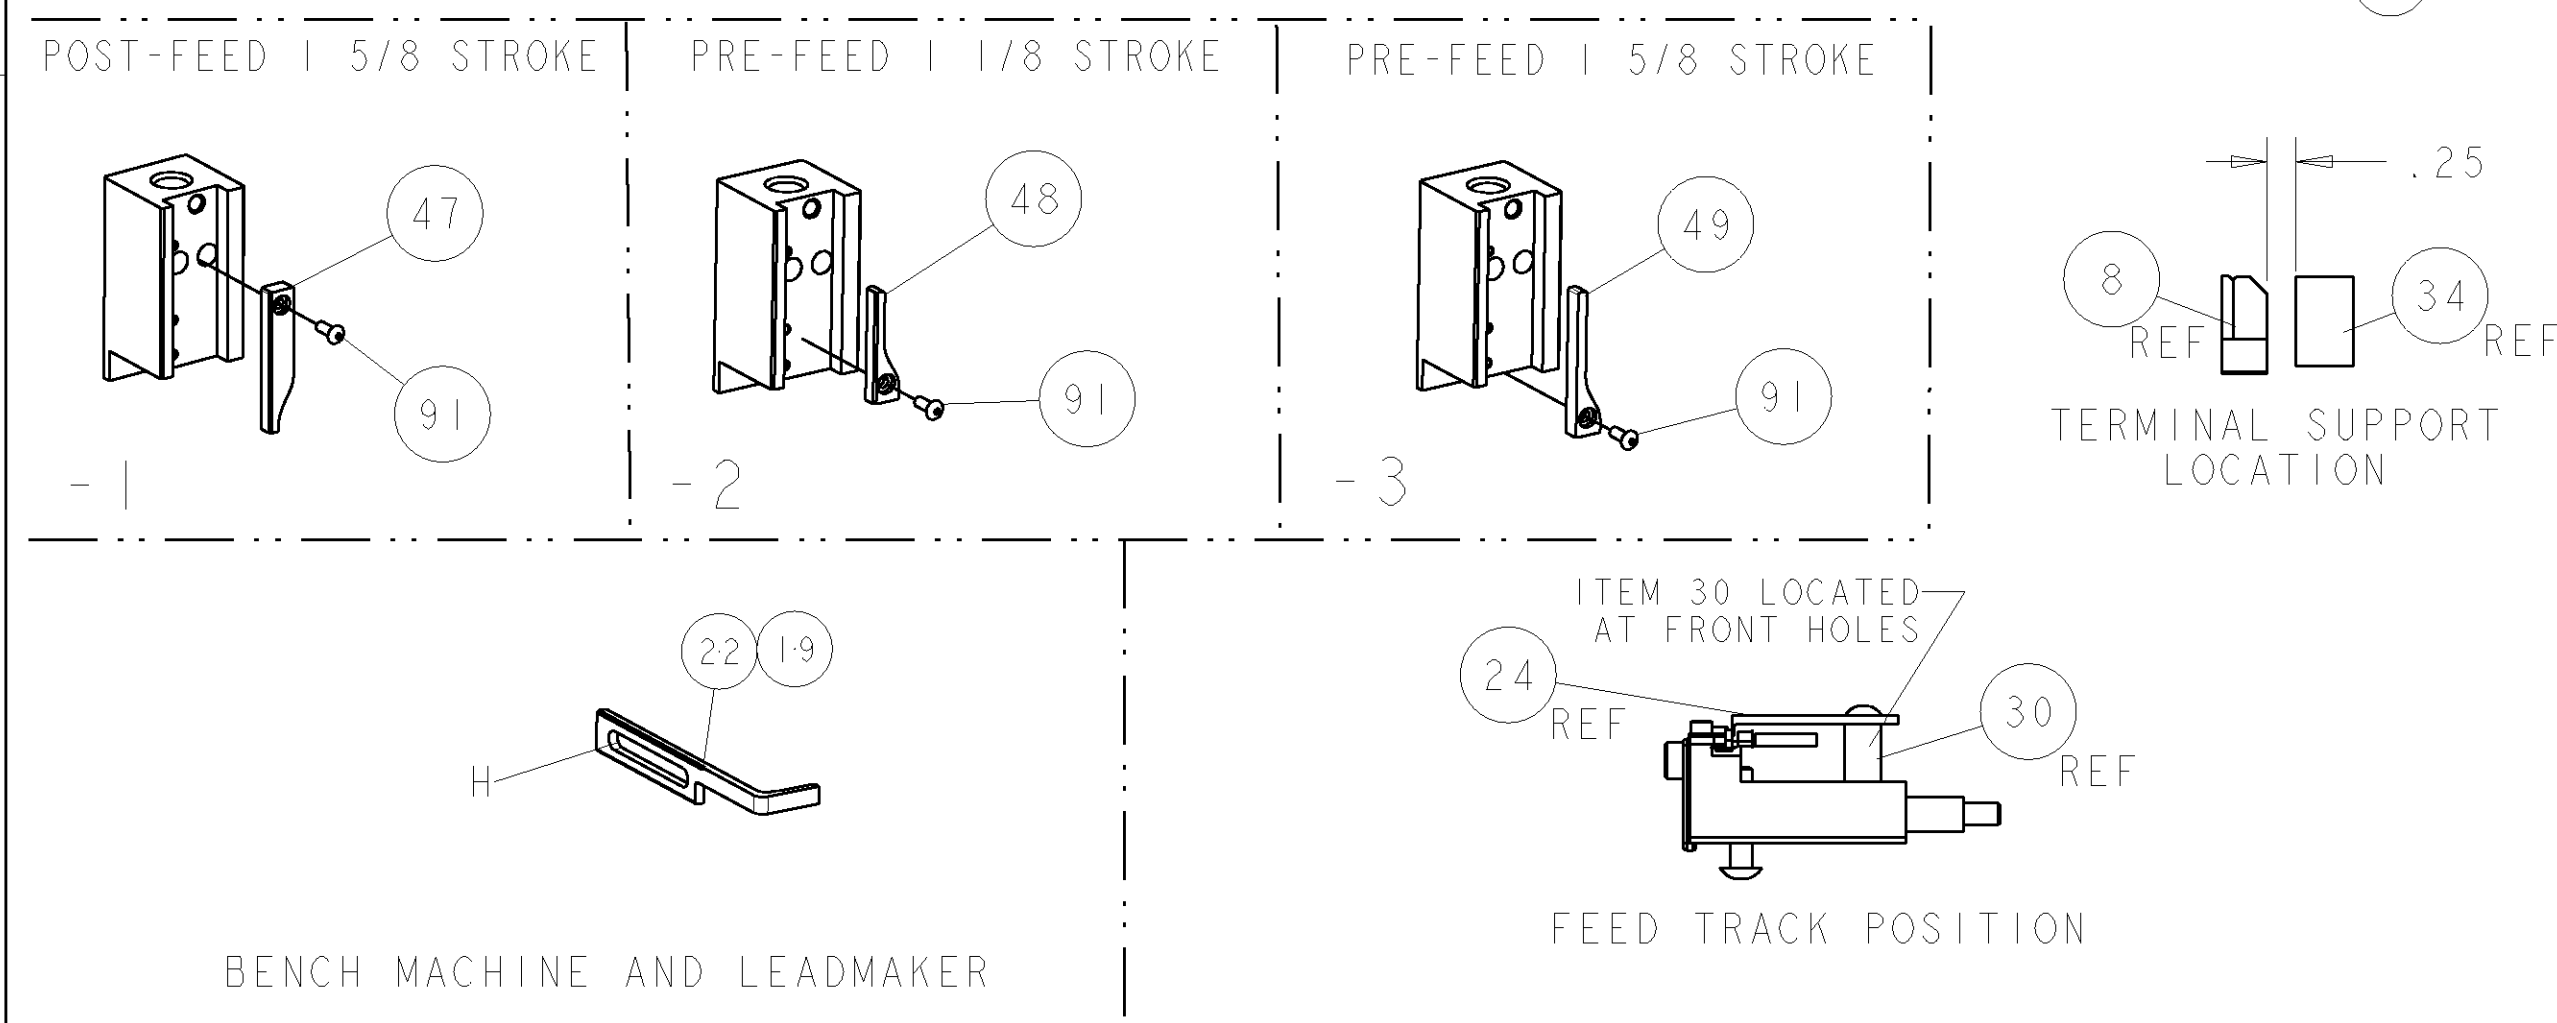


8				7							
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION				20			
(C) COPYRIGHT 20				BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.							
PART NUMBER		REV	FIRST USED	POWER UNIT				FEED TYPE			
1852084-1		A	122500-1	LEADMAKER				POST FEED			
1852084-2		A	565435-5	BENCH MODEL K				PRE FEED			
1852084-3		A	354500-1	BENCH MODEL G				PRE FEED			

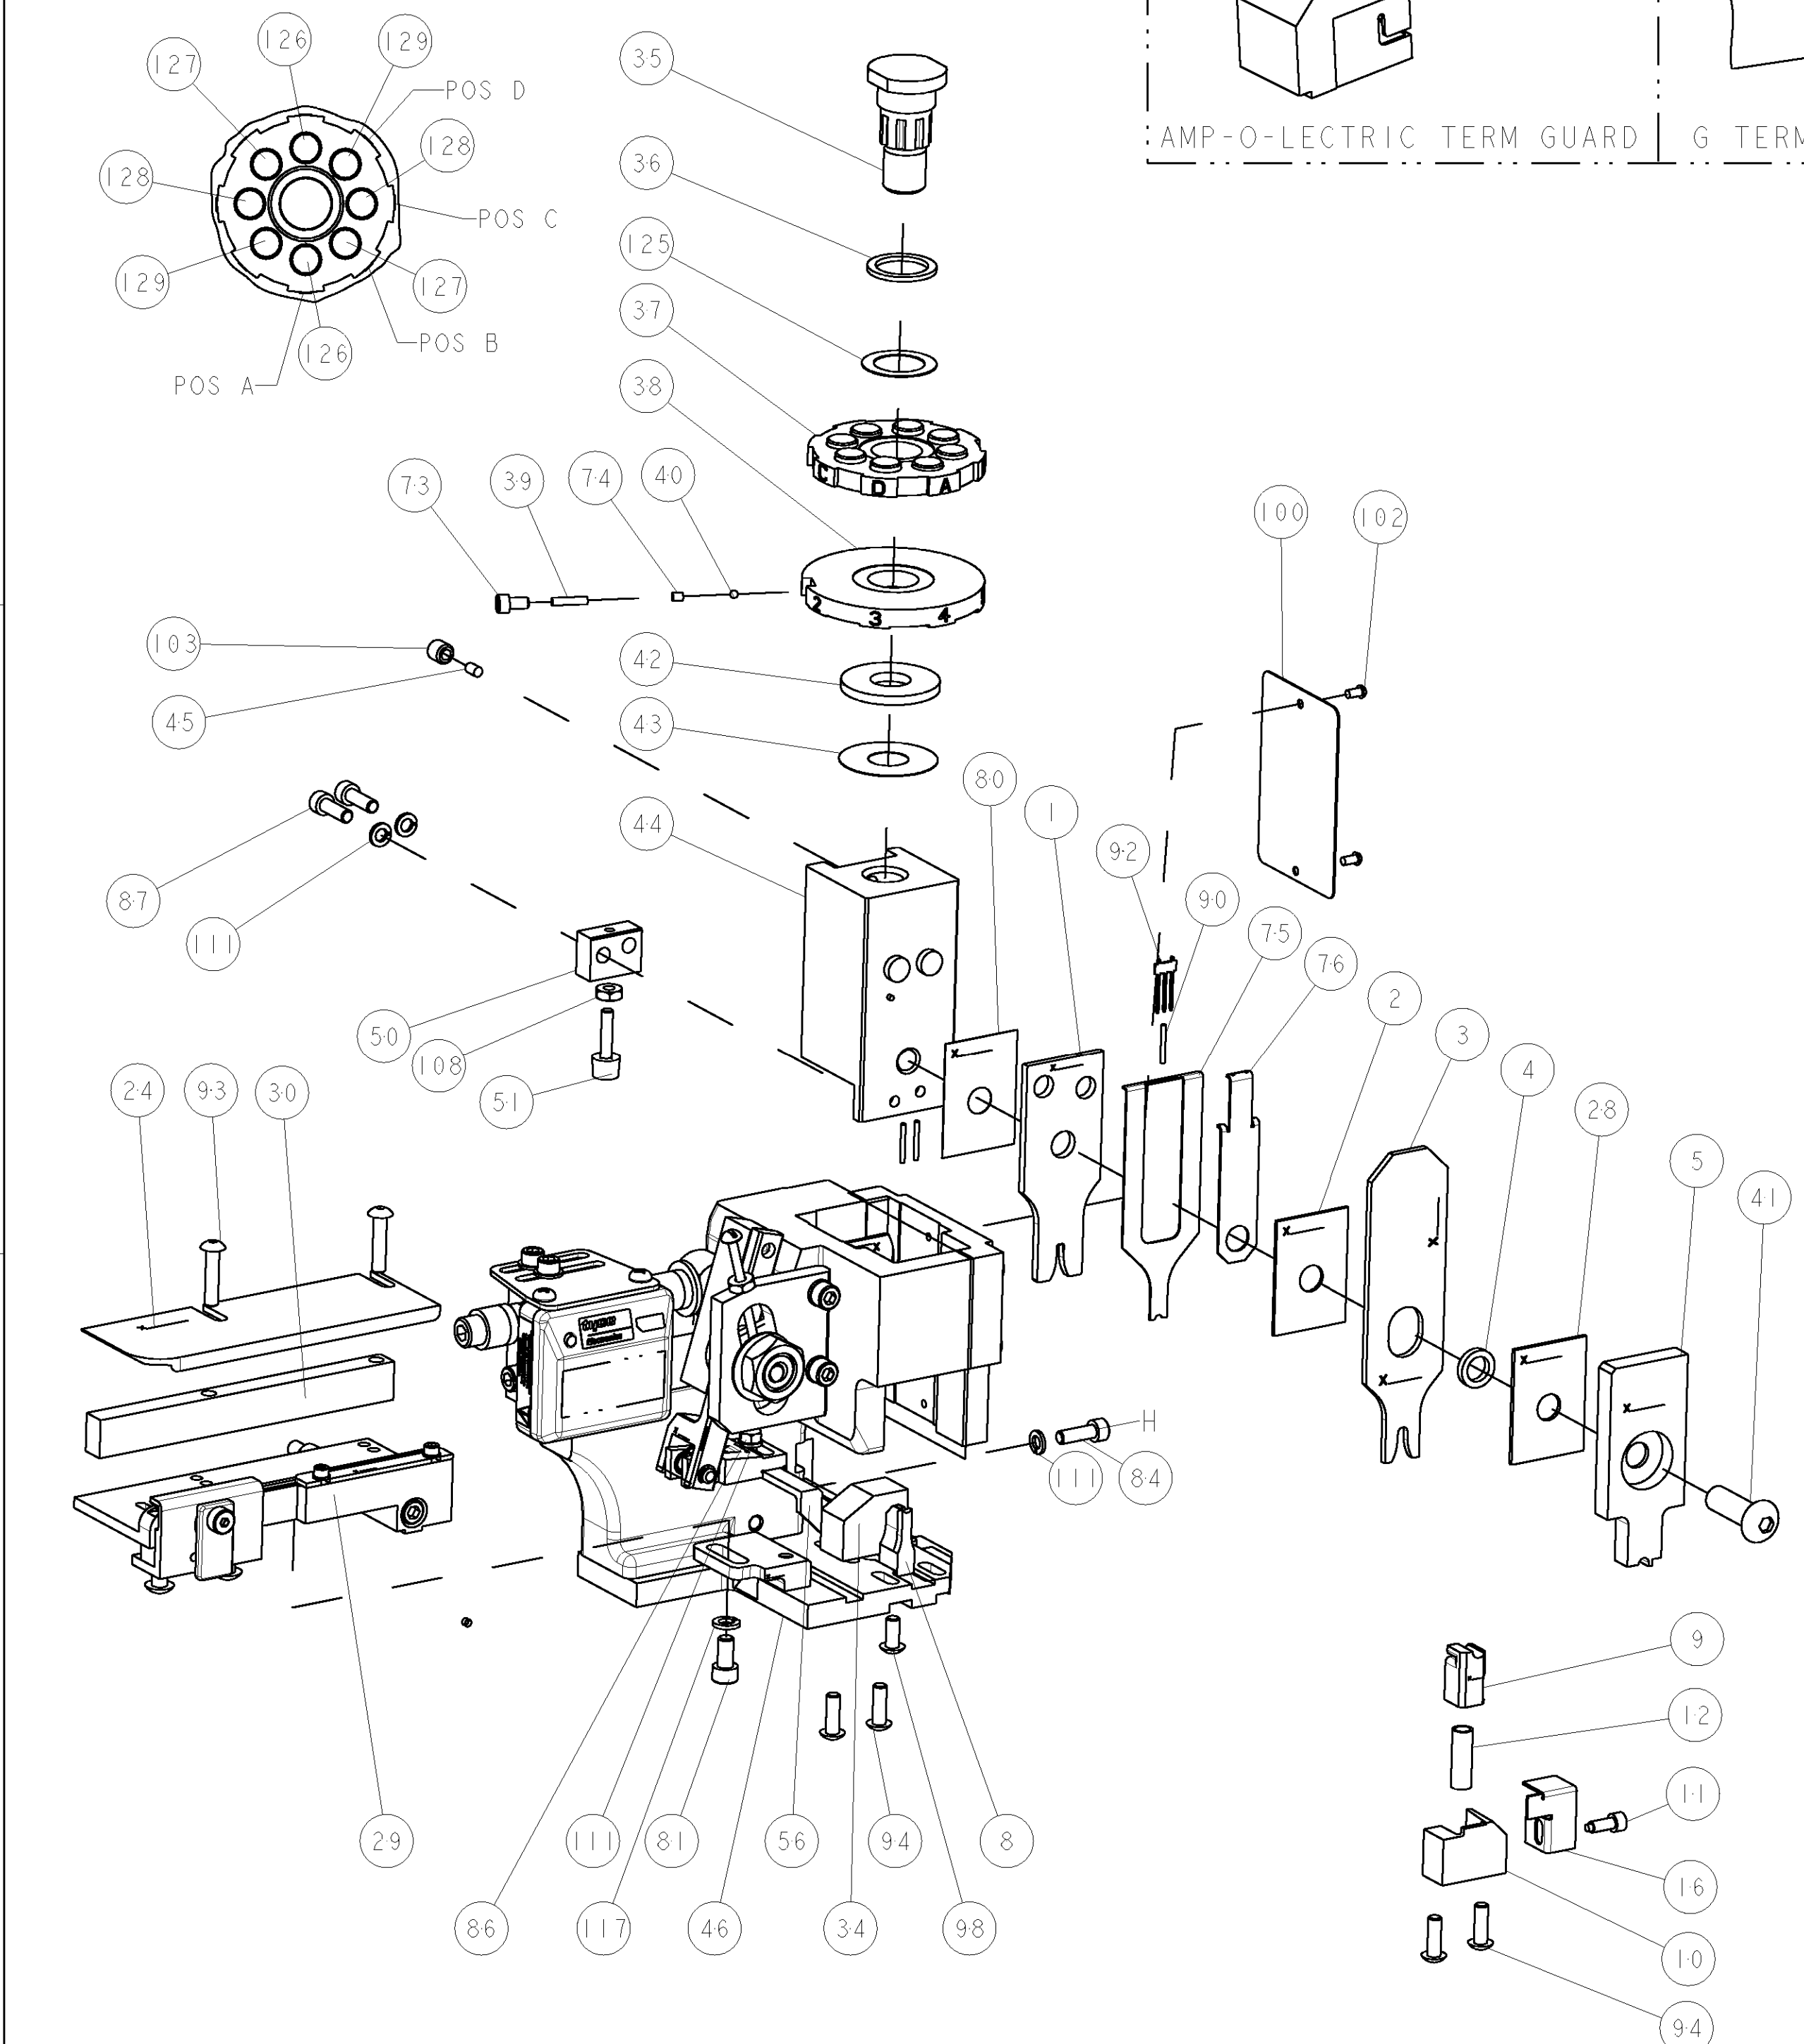

- 1 RECOMMENDED SPARE PARTS
- 2 GREASE LIGHTLY
- 3 GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE

2	2	2	-	3-354779-0	PIN, WIRE DISC, .3140	129
2	2	2	-	2-354779-2	PIN, WIRE DISC, .3100	128
2	2	2	-	354779-7	PIN, WIRE DISC, .3025	127
2	2	2	-	8-354778-1	PIN, WIRE DISC, .2900	126
1	1	1	-	986950-1	WASHER, FLAT PRECISION	125
1	1	1	-	217238-1	GENERAL INSTRUCTION PKG	124
1	1	1	-	4088040	SF APPL INST 408-8040	123
-	-	-	-	-	-	122
-	-	-	-	-	-	121
-	-	-	-	-	-	120
-	-	-	-	-	-	119
-	-	-	-	-	-	118
1	1	1	-	21024-5	WASHER, SPRG LOCK, REG NO 10	117
-	-	-	-	-	-	116
-	-	-	-	-	-	115
-	-	-	-	-	-	114
-	-	-	-	-	-	113
-	-	-	-	-	-	112
4	4	4	-	21024-4	WASHER, SPRG LOCK, REG NO 8	111
-	-	-	-	-	-	110
-	-	-	-	-	-	109
1	1	1	-	21018-5	NUT, HEX, REG 6-32	108
-	-	-	-	-	-	107
-	-	-	-	-	-	106
-	-	-	-	-	-	105
-	-	-	-	-	-	104
1	1	1	-	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	103
2	2	2	-	21017-2	SCREW, DRIVE	102
-	-	-	-	-	-	101
1	1	1	-	461264-1	PLATE, IDENTIFICATION	100
-	-	-	-	-	-	99
1	1	1	-	22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375	98
-	-	-	-	-	-	97
-	-	-	-	-	-	96
-	-	-	-	-	-	95
4	4	4	-	2-21002-2	SCR, BTN SKT HD CAP 8-32 X .500	94
2	2	2	-	2-21002-4	SCR, BTN SKT HD CAP 8-32 X .750	93
1	1	1	-	1424350-1	HOLDER, PIN	92
1	1	1	-	1-21002-7	SCR, BTN SKT HD CAP 6-32 X .375	91
3	3	3	-	1-23147-4	SPRING, COMPRESSION	90
-	-	-	-	-	-	89
-	-	-	-	-	-	88
-	-	-	-	-	-	87
2	2	2	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	86
1	1	1	-	2-22603-0	SCR, HEX HD CAP 8-32 X .312	85
-	-	-	-	-	-	84
1	1	1	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	83
-	-	-	-	-	-	82
-	-	-	-	-	-	81
1	1	1	-	3-21000-4	SCR, SKT HD CAP 10-32 X .375	80
1	1	1	-	455888-1	SPACER, CRIMPER	79
-	REF	-	-	455749-1	GUARD WINDOW	78
3	REF	-	-	679532-1	INSERT, GUARD	77
-	-	-	-	-	-	76
1	1	1	-	1490524-1	DEPRESSOR, SPACER	75
1	1	1	-	1490525-3	DEPRESSOR, WIRE	74
1	1	1	-	690603-1	SPRING ASSIST AMP-O-MATOR APPLICATOR	73
-3	-2	-1	U/M	PART NO	DESCRIPTION	ITEM NO

TERMINAL NAME: TERMINAL					
TYCO PN	MANF PN	ESCUBEDO TERMINAL - AMP CRIMP SPECS			
1572744	7522.01				
-	-	PAD LTR	CRIMP HEIGHT	WIRE SIZE	
-	-	A	.072±.002[1.83±0.05mm]	14 AWG	
-	-	B	.061±.002[1.55±0.05mm]	16 AWG	
-	-	C	.054±.002[1.37±0.05mm]	18 AWG	
-	-	D	.050±.002[1.27±0.05mm]	20 AWG	
-	-	CRIMP	SIZE	TYPE	RANGE
-	-	WIRE	.090 [2.29mm]	F	14-20 AWG
-	-	INSUL	.140 [3.56mm]	O	∅.059- .130
WIRE STRIP LENGTH	TERM APPL SPEC	FEED	APPL INSTRUCTIONS	SET UP GAGE	
.146 - .161	NONE	.433	408-8040	458637-1	

LOC		DIST		REVISIONS							
A	66	P	LTR	DESCRIPTION					DATE	DWN	APVD
		A		RELEASED					10AUG2005	LG	TE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1852084-1](#)