

# Actuator

45-  
2925.2000.111



<https://eao.com/p/45-2925.2000.111>

Your product:

---



## 45-2925.2000.111 Actuator

### FRONT

|                       |           |
|-----------------------|-----------|
| Front dimension:      | Ø 29,5 mm |
| Front bezel colour:   | Silver    |
| Front bezel material: | Metal     |
| Front form:           | round     |

### MOUNTING

|                   |                |
|-------------------|----------------|
| Mounting type:    | Panel mounting |
| Design:           | raised         |
| Mounting cut-out: | Ø 22.3 mm      |

### MECHANICAL CHARACTERISTIC

|                      |                            |
|----------------------|----------------------------|
| Weight:              | 0.084 kg                   |
| Switching action:    | Rest - Maintained (a)      |
| Switching positions: | 2 positions                |
| Switching angle:     | 90° right / -45° ... +45°  |
| Mechanical lifetime: | 1 Mio. cycles of operation |
| Operating frequency: | 1 800/h                    |

### AMBIENT CONDITION

|                        |                     |
|------------------------|---------------------|
| IP front protection:   | IP66, IP67, IP69K   |
| Operating temperature: | - 25 °C ... + 70 °C |
| Storage temperature:   | - 40 °C ... + 80 °C |


|                              |                                                                |
|------------------------------|----------------------------------------------------------------|
| <b>Climate resistance:</b>   | During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6    |
| <b>Vibration resistance:</b> | According to IEC 60068-2-6: 10 ... 500 Hz: 5 g                 |
| <b>Shock resistance:</b>     | According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms |

## CERTIFICATE

|               |                 |
|---------------|-----------------|
| <b>RoHS:</b>  | RoHS compliant  |
| <b>REACH:</b> | REACH compliant |

## OTHER


|                           |                                                                                                |
|---------------------------|------------------------------------------------------------------------------------------------|
| <b>Housing material:</b>  | Metal                                                                                          |
| <b>Hints:</b>             | The standard lock: RONIS, T254                                                                 |
| <b>Short Description:</b> | Actuator, Ø 22.3 mm, Ø 29,5 mm, round, Silver, Metal, Rest - Maintained (a), IP66, IP67, IP69K |
| <b>Mounting cut-outs:</b> |                                                                                                |

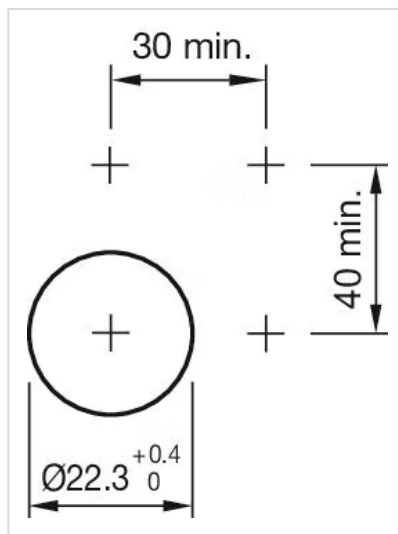

## Wiring diagrams:



## Dimension drawings:

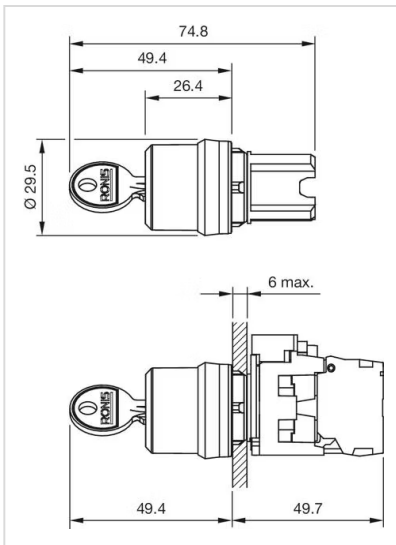

**Switching positions:**

