




MTA 156

TE Internal #: 2-647123-4
PCB Mount Header, Vertical, Wire-to-Board, 4 Position, 3.96 mm [.156 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Power, Black, MTA 156

[View on TE.com >](#)

Connectors > PCB Connectors > PCB Headers & Receptacles

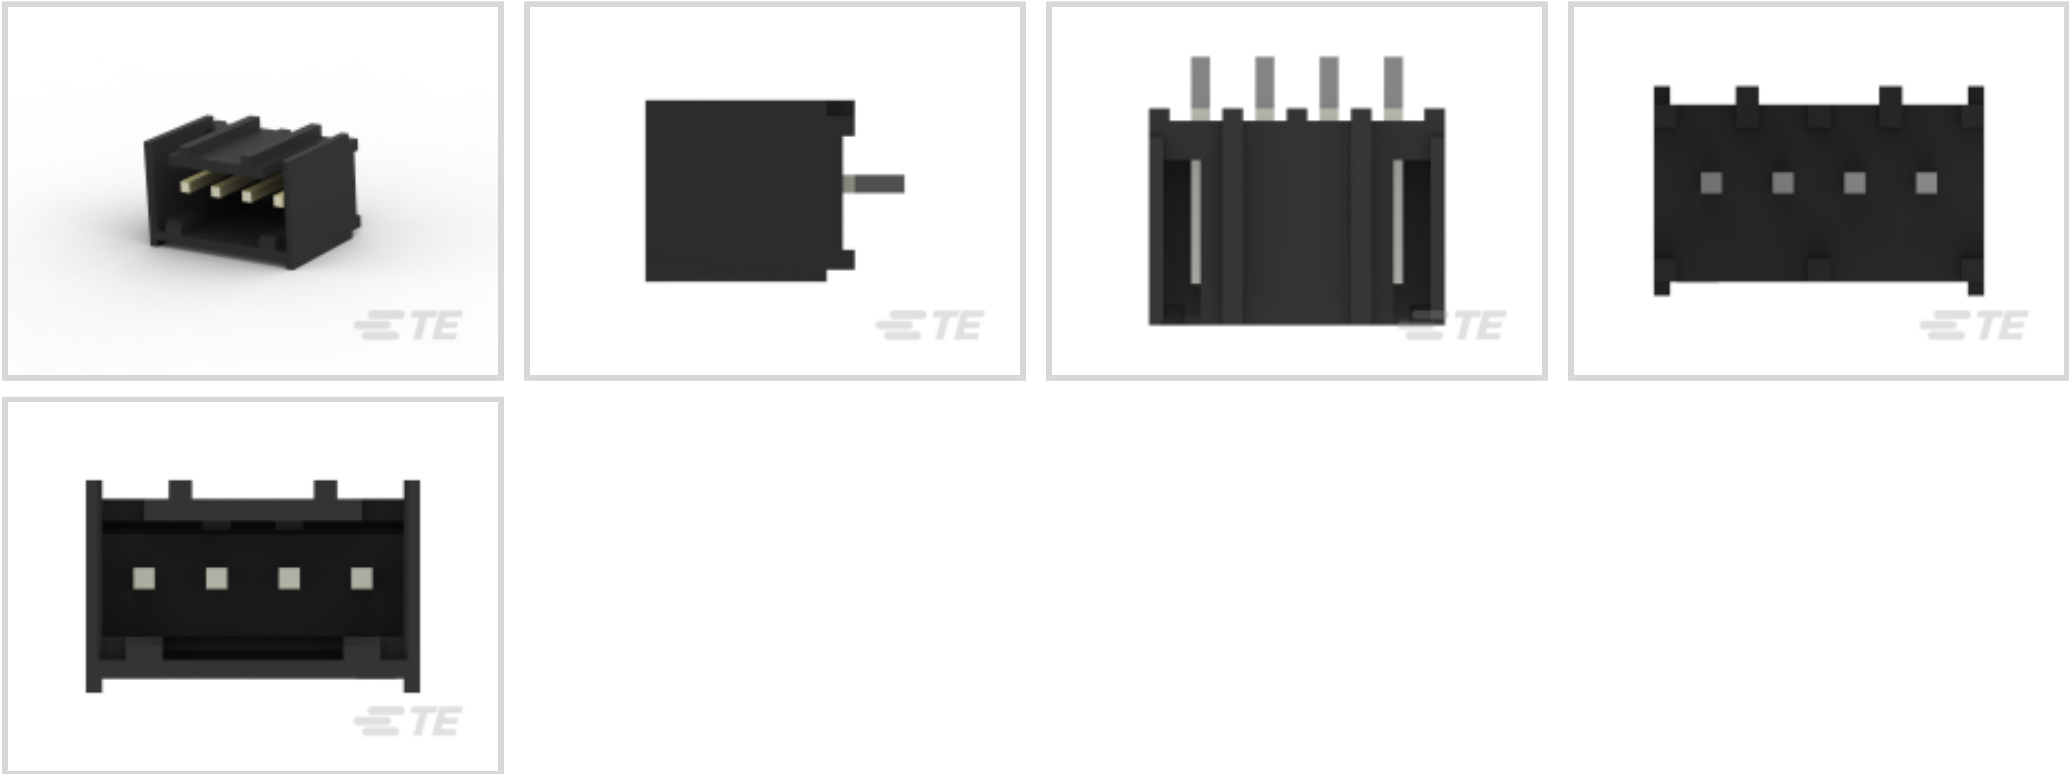

PCB Connector Assembly Type: **PCB Mount Header**
Connector System: **Wire-to-Board**
Number of Positions: **4**
Number of Rows: **1**
Centerline (Pitch): **3.96 mm [.156 in]**

Features

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Assembly Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Power Positions	4
Number of Columns	4
Number of Loaded Positions	4
Connector Contact Load Condition	Fully Loaded
Number of Positions	4
Number of Rows	1



PCB Mount Orientation	Vertical
-----------------------	----------

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Body Features

Connector Profile	Standard
Primary Product Color	Black

Contact Features

Contact Mating Area Length	7.62 mm[.3 in]
Contact Size	1.14mm
Mating Square Post Dimension	1.14 mm[.045 in]
PCB Contact Termination Area Plating Material Thickness	3.81 – 8.89 µm[150 – 350 µin]
Contact Layout	Inline
Contact Underplating Material Thickness	1.27 µm[50 µin]
Contact Mating Area Plating Material Thickness	3.81 – 8.89 µm[150 – 350 µin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Square
Contact Mating Area Plating Material Finish	Matte
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Tin
Contact Type	Tab
Contact Current Rating (Max)	14.24 A

Termination Features

Square Termination Post & Tail Dimension	1.14 mm[.045 in]
Termination Post & Tail Length	3.18 mm[.125 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Mating Alignment Type	Polarization
Mating Retention	With
Panel Mount Feature	Without
Mating Retention Type	Latch Detent



Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	Without
PCB Mount Retention	Without

Housing Features

Mating Entry Location	Top
Housing Material	Thermoplastic Polyester - Glass-Filled
Centerline (Pitch)	3.96 mm[.156 in]

Dimensions

Connector Length	18.24 mm[.718 in]
Connector Height	13.34 mm[.525 in]
Connector Width	11.56 mm[.455 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

UL Rating	Recognized
Glow Wire Rating	Standard Part - Not Glow Wire
Compatible With Agency/Standards Products	CSA, UL
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	500
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant




China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 240°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

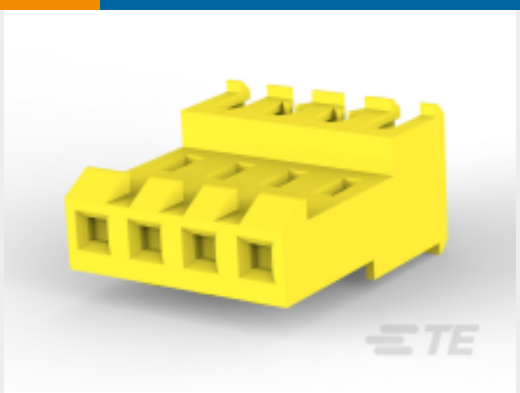 TE Part # 3-640433-4 04P MTA156 CONN ASSY 22AWG RED	 TE Part # 3-640602-4 04P MTA156 CONN ASSY 24AWG LF	 TE Part # 643067-4 04P MTA156 CMOLDED COVER	 TE Part # 3-643818-4 04P MTA156 CONN ASSY 20AWG YEL
 TE Part # 3-640429-4 04P MTA156 CONN ASSY 24AWG WHT	 TE Part # 3-640427-4 04P MTA156 CONN ASSY 20AWG YEL	 TE Part # 3-640600-4 04P MTA156 CONN ASSY 20AWG LF	 TE Part # 3-640428-4 04P MTA156 CONN ASSY 22AWG RED



TE Part # 3-643817-4
04P MTA156 CONN ASSY 18AWG
ORA

TE Part # 640551-4
04P MTA156 COVER

TE Part # 3-643820-4
04P MTA156 CONN ASSY 24AWG
WHT

TE Part # 3-644465-4
04P MTA156 CONN ASSY 18AWG
ORA

TE Part # 640643-4
04P MTA156 COVER F/T

TE Part # 3-640431-4
04P MTA156 CONN ASSY 18AWG
ORA

TE Part # 3-640599-4
04P MTA156 CONN ASSY 18AWG
ORA

TE Part # 3-640601-4
04P MTA156 CONN ASSY 22AWG LF

TE Part # 3-640432-4
04P MTA156 CONN ASSY 20AWG YEL

TE Part # 3-644570-4
04P MTA156 CONN ASSY 18AWG LF

TE Part # 643071-4
04P MTA156 FD-THRU COVER

TE Part # 3-643821-4
04P MTA156 CONN ASSY 26AWG LF

Also in the Series | MTA 156

Connector Caps & Covers(89)

Connector Contacts(4)

Connector Hardware(2)

Insertion & Extraction Tools(1)

PCB Headers & Receptacles(677)


Rectangular Power Connectors(331)

Standard Rectangular Connectors(336)


Customers Also Bought




TE Part #2-1462039-6
IM21GR=IM RELAY 50mW 3V

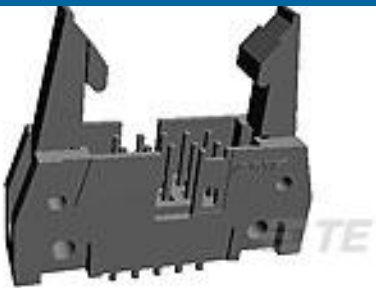

TE Part #5499910-1
A/L UNIV HDR 10P VERT SHT LAT

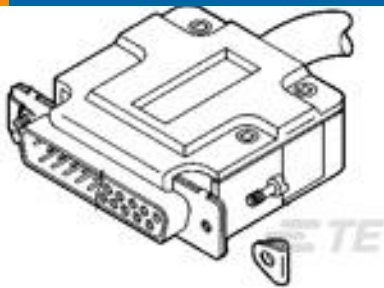


TE Part #5207908-1
STRAIN RELIEF W/SCREW RET KIT

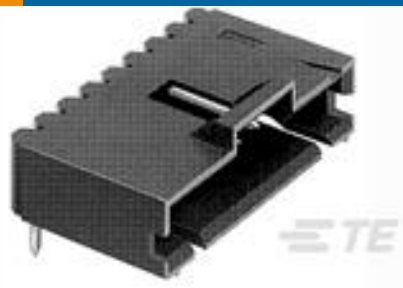


TE Part #5-103634-2
03 MTE HDR SRRA LATCH.100CL LF



TE Part #5556591-1
MJ,LPF,R/A,8P/8C,SHLD,KEYEDP

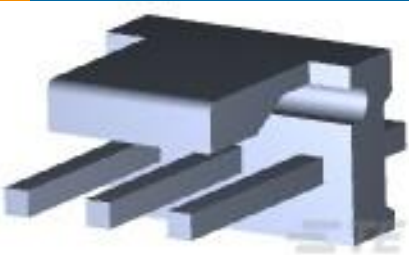

TE Part #3-641208-3
03P MTA156 HDR ASSY FL ST LF

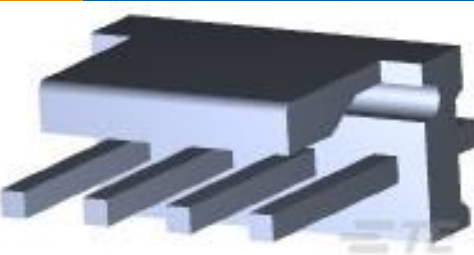

TE Part #3-641208-4
04P MTA156 HDR ASSY FL ST 30AU



TE Part #3-640426-7
07P MTA156 CONN ASSY 18AWG ORA



TE Part #2-2176327-2
CRGP 0805 560R 1%



TE Part #644752-7
07P MTA156 HDR ASSY SQ STR F/L

Documents

Product Drawings

04P MTA156 SHRD HDR ASSY SQ SN

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-647123-4_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-647123-4_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-647123-4_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications



Application Specification

English