
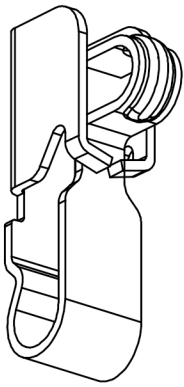
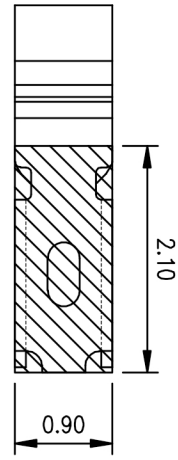
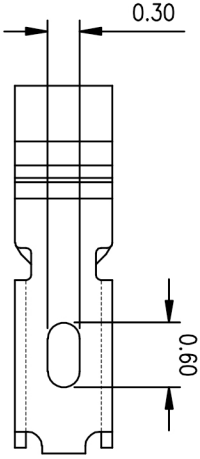

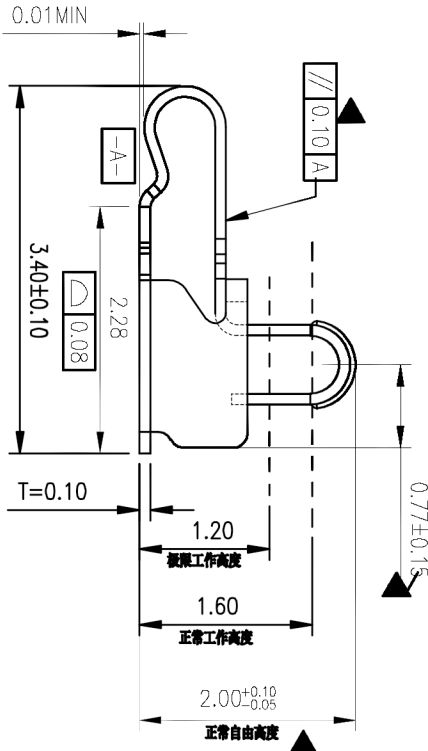


Rev.	ECN Number	Description	Date	Drawn	Checked	Approved

技术要求:

- 1.材质:不锈钢SUS301,T=0.10±0.005;
- 2.端子锡脚焊接面和接触面不可有毛边,其他部位毛边最大0.03mm;
- 3.扭曲:45°/1000mm,拱形 5mm/1000mm;
- 4.标示有“▼”符号的为重点控制和检验尺寸;
- 5.未标注之R MAX R0.13;
- 6.电镀须满足48小时盐雾测试;
- 7.寿命测试>2万次,产品弹力要求在60gf~80gf之间
- 8.镀底50~80u"min,产品外表面镀全金1U"MIN

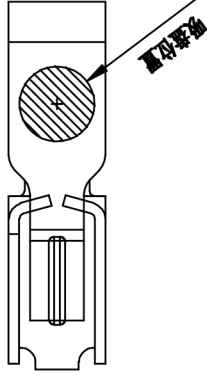

焊盘尺寸

尺寸公差 ±0.05

 深圳市蝙蝠无线技术有限公司 Shenzhen Bat Wireless Technology Co., Ltd.			GENERAL TOLERANCE		SCALE:		DRAWN		DATE		DWG. NO. 681-0033B-2		TITLE 客户图		REV. A				
			XX. ±0.50		1:1														
			X. ±0.35		X: ±2.0'		UNIT:		DATE										
			.X ±0.25		.X' ±1.0'		mm												
			.XX ±0.15		.XX' ±0.5'		SIZE:		DATE										
				A4						APPROVE				PARTS NO.(INTENDED USE) BW0033BG-L3.4W0.9H2.0		RF Antenna Spring,SMT, L3.40*W0.9*H2.0mm		SHEET 1/1	



深圳市蝙蝠无线技术有限公司
Shenzhen Bat Wireless Technology Co., Ltd.