
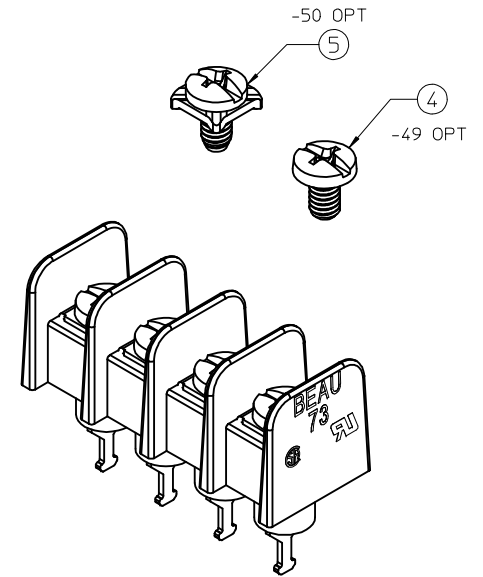
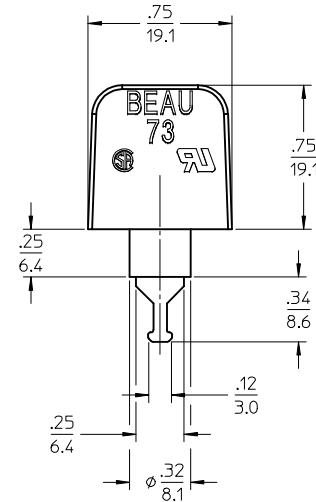


13	12	11	10	9	8	7	6	5	4	3	2	1
ENGINEERING NO.	CIRCUITS	IN	mm	A								
73202-A-C-XX	2	.97	24.6									
73203-A-C-XX	3	1.40	35.6									
73204-A-C-XX	4	1.84	46.7									
73205-A-C-XX	5	2.28	57.9									
73206-A-C-XX	6	2.72	69.1									
73207-A-C-XX	7	3.15	80.0									
73208-A-C-XX	8	3.59	91.2									
73209-A-C-XX	9	4.03	102.4									
73210-A-C-XX	10	4.47	113.4									
73211-A-C-XX	11	4.90	124.5									
73212-A-C-XX	12	5.34	135.6									
73213-A-C-XX	13	5.78	146.8									
73214-A-C-XX	14	6.22	158.0									
73215-A-C-XX	15	6.65	168.9									
73216-A-C-XX	16	7.09	180.1									
73217-A-C-XX	17	7.53	191.3									
73218-A-C-XX	18	7.97	202.4									
73219-A-C-XX	19	8.40	213.4									
73220-A-C-XX	20	8.84	224.5									
73221-A-C-XX	21	9.28	235.7									
73222-A-C-XX	22	9.72	246.9									
73223-A-C-XX	23	10.15	257.8									
73224-A-C-XX	24	10.59	269.0									
73225-A-C-XX	25	11.03	280.2									
73226-A-C-XX	26	11.47	291.3									
73227-A-C-XX	27	11.90	302.3									
73228-A-C-XX	28	12.34	313.4									
73229-A-C-XX	29	12.78	324.6									
73230-A-C-XX	30	13.22	335.8									

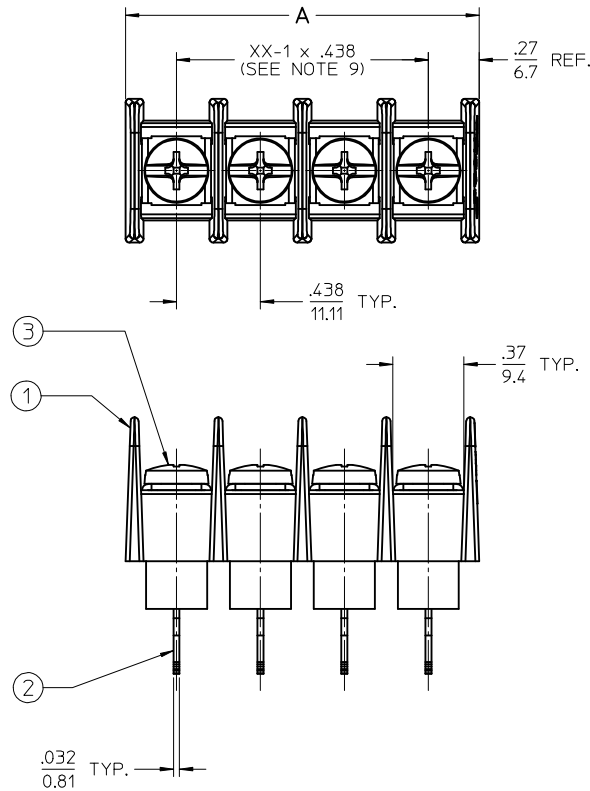

NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. ELECTRICAL SPECIFICATIONS
VOLTAGE RATING: 300V (10 AWG WIRE)
CURRENT RATING: 30 AMPS (#8 SCREW)
4. WIRE RANGE: 10-24 AWG
5. WIRE STRIP: .31 (8mm)
6. SCREW TORQUE: 12 IN. LBS.
7. PROD SPEC: PS-38730-001
8. UL FILE E48521
9. XX = NUMBER OF CIRCUITS

73 2 XX -A-C-XX

SERIES
TERMINAL STYLE
CIRCUITS
2 THRU 30

SCREW OPTIONS
-49: BRASS PHILIPS SLOT
-50: SCREW W/CLAMP WASHER

OPTIONS
-A: 8-32 SCREWS
-C: NO MOUNTING ENDS

ENGINEERING NUMBER LEGEND

5	XX	SCREW #8-32 X .31 PAN HD PHSL W/SQ WASHER -50	STEEL	ZINC PLATED
4	XX	SCREW #8-32 X .29 BHD PHSL -49	BRASS	NICKEL PLATED
3	XX	SCREW #8-32X.29 BHD PHSL LUBE	STEEL	ZINC PLATED
2	XX	TERM TURRET 6C SN/B	BRASS	TIN PLATED
1	1	SR BARRIER TERMINAL STRIP, NO MTG ENDS	PBT	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

RELEASED EC NO: IPG2015-1766 DRAWN: RSTONE CHKD: B ARDEN APPR: JFMURPHY REV	DESCRIPTION 2015/04/09 2015/04/20	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION				
				mm	INCH	DRAWN BY RSTONE	DATE 2015/04/09	TITLE SINGLE ROW BARRIER STRIP INSULATED SOLDER TURRET NO MTG ENDS, #8 SCREW					
			4 PLACES	± ---	± ---	CHECKED BY B ARDEN	DATE						
			3 PLACES	± ---	± .005	APPROVED BY JFMURPHY		DATE 2015/04/20	molex				
			2 PLACES	± 0.13	± .01	MATERIAL NO.		DOCUMENT NO.					
			1 PLACE	± 0.3	± ---	SEE CHART		SD-38731-010		1 OF 1			
			0 PLACE	± ---	± ---	SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
			ANGULAR ± 2 °										
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										