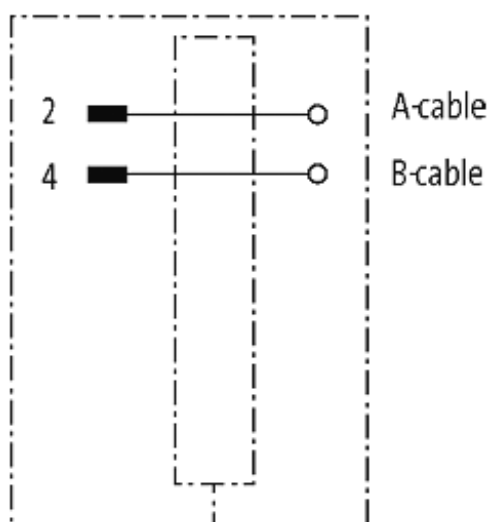


M12 MALE 0° B CODED SHIELDED WIREABLE SCREW TERM.2 POLE max. 0.75mm² 6-8mm PROFIBUS[Link to Product](#)**Illustration**

Product may differ from Image

Technical Data

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	max. 0.75 mm ²
Sealing range (cable Ø)	6...8 mm
Housing	Brass, nickel plated
Protection	IP67 inserted and tightened (EN 60529)

General data

Temperature range	-25...+85 °C
-------------------	--------------

Commercial data

country of origin	DE
customs tariff number	85369010

EAN	4048879198646
eClass	27279218
minimum order quantity	1