




1/4 Hex Male-Female Standoff

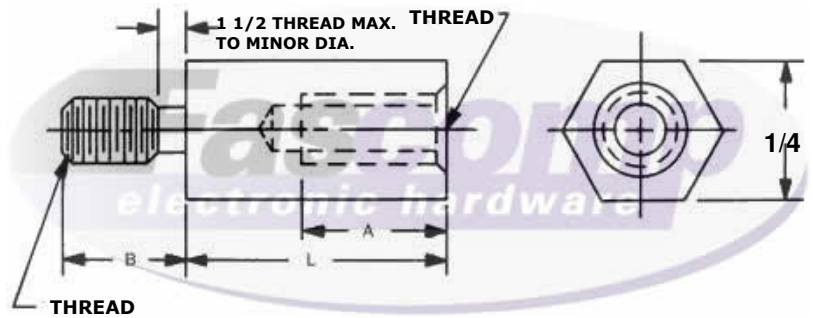

Hex Length Table		
✓	FCXXXX	Length (L)
	FC4530	1/4
	FC4531	5/16
	FC4532	3/8
	FC4533	7/16
	FC4534	1/2
	FC4535	9/16
	FC4536	5/8
	FC4537	11/16
	FC4538	3/4
	FC4539	13/16
	FC4540	7/8
	FC4541	15/16
	FC4542	1
	FC4543	1-1/16
	FC4544	1-1/8
	FC4545	1-3/16
	FC4546	1-1/4
	FC4547	1-5/16
	FC4548	1-3/8
	FC4549	1-7/16
	FC4550	1-1/2
	FC4551	1-9/16
	FC4552	1-5/8
	FC4553	1-11/16
	FC4554	1-3/4
	FC4555	1-13/16
	FC4556	1-7/8
	FC4557	1-15/16
	FC4558	2
	FC4559	2-1/8
	FC4560	2-1/4
	FC4561	2-3/8
	FC4562	2-1/2
	FC4563	2-5/8
	FC4564	2-3/4
	FC4565	2-7/8
	FC4566	3
	FC4567	3-1/4
	FC4568	3-1/2
	FC4569	3-3/4
	FC4570	4

Create a part number:

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

Thread			
Short lengths, 'A' tapped to maximum depth			
✓	Thread Code (XXX)	Depth (A)	Length (B)
	256	3/16	5/32
	440	1/4	3/16
	632	3/8	1/4
	832	7/16	3/8

Material		
✓	Material Code (XX)	
	A	Aluminum
	B	Brass
	S	Steel
	SS	Stainless Steel
	N	Nylon

Tolerances Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

✓	Compatible Finish	
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)



Fascomp Electronic Hardware
 7814 Kingspointe Pkwy
 Orlando, FL 32819
 www.fascomp.com
 Tel: (407) 226-2112
 Fax: (407) 226-3370

Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fascomp:

[FC4546-440-A](#) [FC4546-440-SS](#) [FC4546-632-A](#) [FC4546-632-SS](#) [FC4546-832-A](#) [FC4546-832-SS](#) [FC4546-832-S-](#)
[12](#) [FC4550-440-S-12](#) [FC4550-632-S-12](#) [FC4550-832-S-12](#) [FC4558-440-S-12](#) [FC4558-632-S-12](#) [FC4558-832-S-12](#)
[FC4546-440-S-12](#) [FC4546-632-S-12](#) [FC4558-440-A](#) [FC4558-440-SS](#) [FC4558-632-A](#) [FC4558-632-SS](#) [FC4558-832-](#)
[A](#) [FC4558-832-SS](#) [FC4550-440-A](#) [FC4550-440-SS](#) [FC4550-632-A](#) [FC4550-632-SS](#) [FC4550-832-A](#) [FC4550-832-SS](#)