




Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors

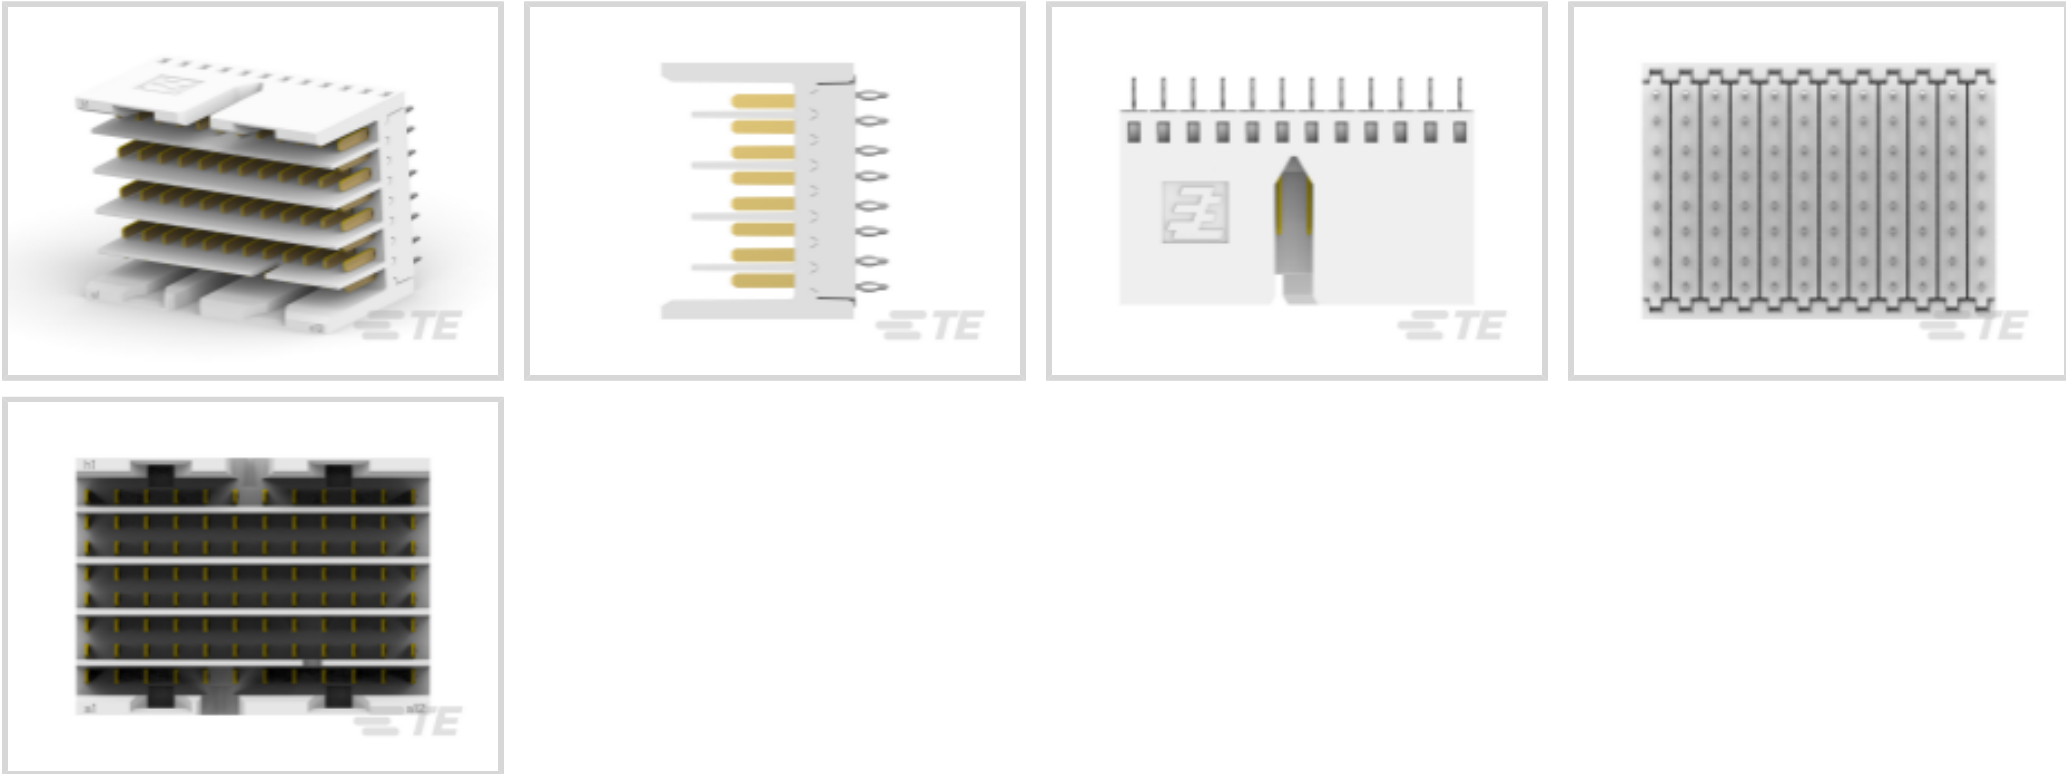

Number of Positions: 192

Row-to-Row Spacing: 1.25 mm [.05 in]

Mating Alignment: With

Mating Alignment Type: Polarization

Number of Rows: 8

Features

Product Type Features

Backplane Module Type	Center
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header
Shroud Style	Unshrouded

Configuration Features

Pairs per Column	8
Number of Pairs	96
Stackable	Yes
Number of Signal Positions	192
Number of Positions	192
Number of Rows	8
Number of Columns	12
PCB Mount Orientation	Vertical



Electrical Characteristics

Impedance	30 Ω
Operating Voltage	30 VAC

Body Features

Shield Material	Copper Alloy
Primary Product Color	Natural

Contact Features

PCB Contact Termination Area Plating Material Thickness	.5 – 2.5 μm[20 – 100 μin]
Contact Type	Pin
Contact Shape & Form	Dual Beam
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	.5 A

Termination Features

Termination Post & Tail Length	1.6 mm[.493 in]
Termination Method to PCB	Through Hole - Press-Fit

Mechanical Attachment

Guide Hardware	Without
Mating Retention	Without
PCB Mount Alignment	With
PCB Mount Retention	With
PCB Mount Retention Type	Action/Compliant Tail
Mating Alignment	With
Mating Alignment Type	Polarization

Housing Features

Number of Shrouded Sides	0
End Wall Location	None
Housing Material	LCP (Liquid Crystal Polymer)
Centerline (Pitch)	1.45 mm[.057 in]

Dimensions

Connector Length	17.3 mm[.681 in]
------------------	------------------



Connector Height	9.5 mm[.374 in]
Connector Width	12.51 mm[.493 in]
PCB Thickness (Recommended)	1.2 mm
PCB Hole Diameter	.4 mm[.016 in]
Row-to-Row Spacing	1.25 mm[.05 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Durability Rating	250 Cycles
Circuit Application	Signal

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Tray
------------------	------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits



as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 1982738-2
Female Connector IEC

TE Part # 1857657-2
Female Connector

TE Part # 528508-2
REMOVAL TOOL Z-PACK MALE SLIM UHD

Also in the Series | Z-PACK Slim UHD

Hard Metric Backplane Connectors(2)

High Speed Backplane Connectors(12)

Customers Also Bought

TE Part #5747841-4
15 MSFL PLUG RA 318 (IN,FM,BL)

TE Part #5106081-1
2MM HM, HEADER, TYPE C

TE Part #120943-3
ASSEMBLY, R/A UPM RECPT, 5 POS


TE Part #825440-5
MOD 2 PINHDR 2X05P.

TE Part #120943-4
ASSEMBLY, R/A UPM RECPT, 6 POS

TE Part #1645498-4
UNV,PWR,MDL.6 POS. VERT.HDR, 15MM STACK

TE Part #3-1879355-4
RR03 5% 100K AMMO

TE Part #1-2324271-4
LEFT SEGMENT LGA4189-4 SOCKET-P4 FOR ODM

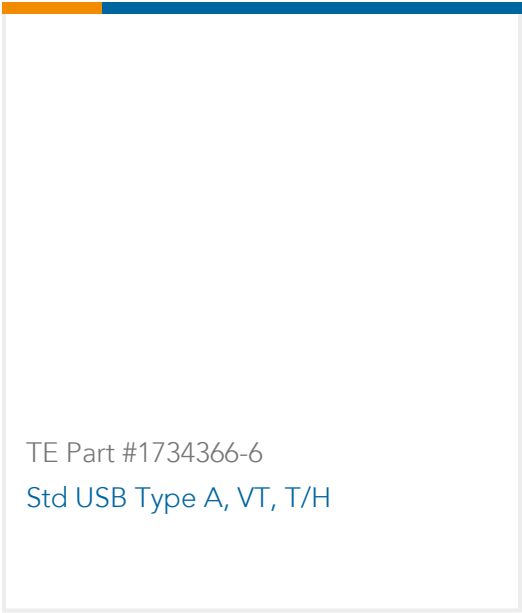

TE Part #1734366-6
Std USB Type A, VT, T/H

Documents

Product Drawings

Vert.Male, IEC L2

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2042088-2_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2042088-2_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2042088-2_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

High Speed Backplane Connectors catalog - Z-PACK Slim UHD Connector

English

Z-Pack Slim UHD Connector Platform

English

Product Specifications

Application Specification

English

Instruction Sheets

Customer Manual (non U.S.)

German

Customer Manual (non U.S.)

German

Agency Approvals

UL Report



English