



VAL-U-LOK

TE Internal #: 1586862-8
Housing, Plug, Wire-to-Wire, 8 Position, 4.2 mm [.165 in] Centerline,
Wire & Cable, UL 94V-2, GWT 750°C (Without Flame), Rectangular
Power Connectors

[View on TE.com >](#)

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Housing**
Connector & Housing Type: **Plug**
Connector System: **Wire-to-Wire**
Number of Positions: **8**
Centerline (Pitch): **4.2 mm [.165 in]**

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Insertion Force	15 Newton
Compatible With Wire & Cable Type	Discrete Wire
Number of Positions	8
Number of Power Positions	0
Number of Signal Positions	0
Number of Rows	2

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------



Contact Features

Contact Layout	Matrix
Contact Retention Within Housing	Without
Contact Type	Receptacle

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Housing Features

Centerline (Pitch)	4.2 mm [.165 in]
Housing Color	White
Housing Material	Polyamide

Dimensions

Connector Height	9.6 mm [.378 in]
Product Width	23.8 mm [.94 in]
Product Length	18 mm [.709 in]
Compatible Insulation Diameter Range	1.2 – 3.1 mm [.047 – .122 in]
Row-to-Row Spacing	4.2 mm [.165 in]

Usage Conditions

Operating Temperature Range	-40 – 105 °C [-40 – 221 °F]
-----------------------------	-----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Identification Marking

Circuit Identification Feature	With
--------------------------------	------

Industry Standards

CSA Rating	208567
UL Rating	Recognized
Compatible With Agency/Standards Products	CSA, UL
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-2
Glow Wire Rating	GWT 750°C (Without Flame)



Packaging Features

Packaging Quantity	500
Packaging Method	Bag & Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 <div>TE Part # 1586765-8 8P RCPT VAL-U-LOK GW</div>	 <div>TE Part # 1586768-8 8P VERT HDR VAL-U-LOK GW</div>	 <div>TE Part # 2296205-8 8P RCPT VAL-U-LOK GWT/V0</div>	 <div>TE Part # 2029265-8 8P VAL-U-LOK VRTHDR W/PGS GW</div>
---	---	---	---





TE Part # 2029059-8
8P VAL-U-LOK VRTHDR W/PGS GW



TE Part # 1586863-8
8P VAL-U-LOK R/A HDR GW


Customers Also Bought




TE Part #1586845-1
04P UMNL CAP HSG NATL, GW




TE Part #1586849-1
03P UMNL CAP HSG NATL, GW

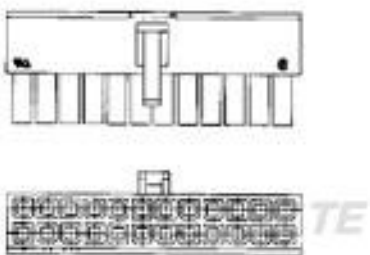

TE Part #1586765-8
8P RCPT VAL-U-LOK GW



TE Part #794991-1
02P UMNL BLACK INTERFACE SEAL

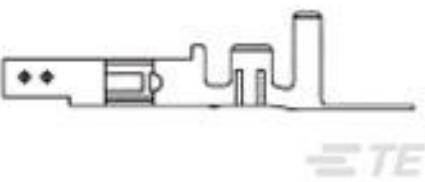

TE Part #794956-1
VAL-U-LOK SKT BR SN 22-18AWG



TE Part #1586851-1
02P UMNL PLUG HSG, GW




TE Part #350699-1
UMNL SPLIT PIN PTPBR



TE Part #40509
SPLICE 3300 TO 9000 CMA BR



TE Part #3-1633107-9
ANVIL, COMBINATION



TE Part #1320838-1
CAPACITOR BOARD ASSY.

Documents

Product Drawings

8P FH PLUG VAL-U-LOK FH GW

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1586862-8_B_c-1586862-8-b.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_1586862-8_B_c-1586862-8-b.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1586862-8_B_c-1586862-8-b.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[VAL-U-LOK_GLOW_WIRE_CONNECTORS](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL Report](#)

English