
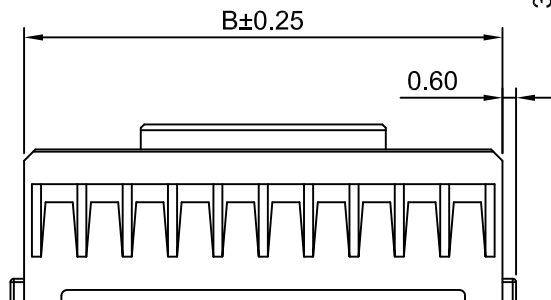
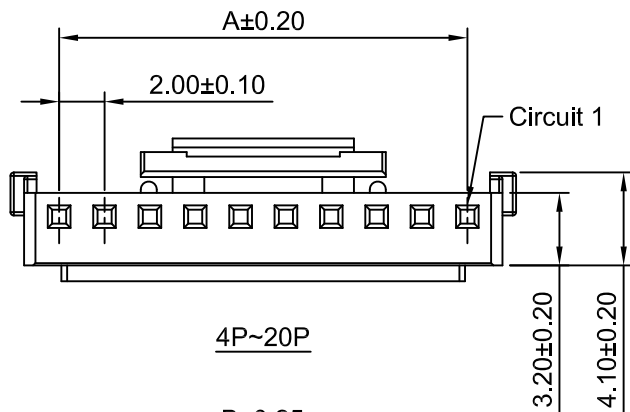

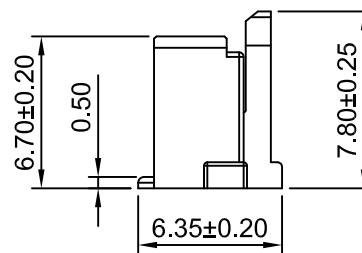


2P~3P



Ordering Information:

A2008HA-XP - ***

1 2

1.Part NO.

2.Color:

(blank): White

IV: Ivory

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: $30\text{m}\Omega$ Max

Insulation Resistance: $1000\text{M}\Omega$ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2008HA-2P	2.00	5.10
A2008HA-3P	4.00	7.10
A2008HA-4P	6.00	9.10
A2008HA-5P	8.00	11.10
A2008HA-6P	10.00	13.10
A2008HA-7P	12.00	15.10
A2008HA-8P	14.00	17.10
A2008HA-9P	16.00	19.10
A2008HA-10P	18.00	21.10
A2008HA-11P	20.00	23.10
A2008HA-12P	22.00	25.10
A2008HA-13P	24.00	27.10
A2008HA-14P	26.00	29.10
A2008HA-15P	28.00	31.10
A2008HA-16P	30.00	33.10
A2008HA-17P	32.00	35.10
A2008HA-18P	34.00	37.10
A2008HA-19P	36.00	39.10
A2008HA-20P	38.00	41.10

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 2.00mm PITCH HOUSING	
mm	1:1	1 of 1		
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2008HA-XP	REV A2
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°				
				

A2	CHANGE THE DRAWING	2020.08.11
A1	CHANGE THE SIZE	2020.01.11
A0	NEW RELEASE	2012.12.13
REV	DESCRIPTION	DATE