



Figure similar

Mechanically held lighting contactor, Contactor amp rating 20Amp 0NC _
4NO poles, 110-120V 50/60HZ coil, Non-combination type, Enclosure
NEMA type 12, Dust/drip proof for indoors

product brand name	Class CLM
design of the product	Mechanically held lighting contactor
special product feature	Energy efficient; Quiet operation
General technical data	
weight [lb]	8 lb
Height x Width x Depth [in]	16 × 13 × 6 in
touch protection against electrical shock	NA for enclosed products
installation altitude [ft] at height above sea level maximum	6560 ft
country of origin	USA
Contactor	
size of contactor	20 Amp
number of NO contacts for main contacts	4
number of NC contacts for main contacts	0
operating voltage for main current circuit at AC at 60 Hz maximum	600 V
contact rating of the main contacts of lighting contactor	
• at tungsten (1 pole per 1 phase) rated value	20A @250V 1p 1ph
• at tungsten (2 poles per 1 phase) rated value	20A @250V 2p 1ph
• at tungsten (3 poles per 3 phases) rated value	20A @250V 3p 3ph
• at ballast (1 pole per 1 phase) rated value	20A @347V 1p 1ph
• at ballast (2 poles per 1 phase) rated value	20A @600V 2p 1ph
• at ballast (3 poles per 3 phases) rated value	20A @600V 3p 3ph
• at resistive load (1 pole per 1 phase) rated value	30A @347V 1p 1ph
• at resistive load (2 poles per 1 phase) rated value	30A @600V 2p 1ph
• at resistive load (3 poles per 3 phases) rated value	30A @600V 3p 3ph
Auxiliary contact	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of total auxiliary contacts maximum	4
contact rating of auxiliary contacts of contactor according to UL	NA
Coil	
type of voltage of the control supply voltage	AC
control supply voltage	
• at AC at 50 Hz rated value	110 ... 120 V
• at AC at 60 Hz rated value	110 ... 120 V
apparent pick-up power of magnet coil at AC	600 V·A

apparent holding power of magnet coil at AC	6 V·A
operating range factor control supply voltage rated value of magnet coil	0.85 ... 1.1
Enclosure	
degree of protection NEMA rating of the enclosure	NEMA 12 enclosure
design of the housing	Dust tight and drip proof for indoors
Mounting/wiring	
mounting position	Vertical
fastening method	Surface mounting and installation
type of electrical connection for supply voltage line-side	Screw-type terminals
tightening torque [lbf·in] for supply	18 ... 18 lbf·in
type of connectable conductor cross-sections at line-side at AWG cables single or multi-stranded	2x (18 ... 10 AWG)
temperature of the conductor for supply maximum permissible	75 °C
material of the conductor for supply	CU
type of electrical connection for load-side outgoing feeder	Screw-type terminals
tightening torque [lbf·in] for load-side outgoing feeder	18 ... 18 lbf·in
type of connectable conductor cross-sections at AWG cables for load-side outgoing feeder single or multi-stranded	2x (18 ... 10 AWG)
temperature of the conductor for load-side outgoing feeder maximum permissible	75 °C
material of the conductor for load-side outgoing feeder	CU
type of electrical connection of magnet coil	Screw-type terminals
tightening torque [lbf·in] at magnet coil	18 ... 18 lbf·in
type of connectable conductor cross-sections of magnet coil at AWG cables single or multi-stranded	2x (18 ... 10 AWG)
temperature of the conductor at magnet coil maximum permissible	75 °C
material of the conductor at magnet coil	CU
Short-circuit current rating	
design of the fuse link for short-circuit protection of the main circuit required	none
design of the short-circuit trip	Thermal magnetic circuit breaker
breaking capacity maximum short-circuit current (Icu)	
• at 240 V	5 kA
• at 480 V	5 kA
• at 600 V	5 kA
certificate of suitability	NEMA ICS 2; UL 508; CSA 22.2, No. 14
Further information	

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:CLM2B04120>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/US/en/ps/US2:CLM2B04120>



Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:CLM2B04120&lang=en

Certificates/approvals

<https://support.industry.siemens.com/cs/US/en/ps/US2:CLM2B04120/certificate>

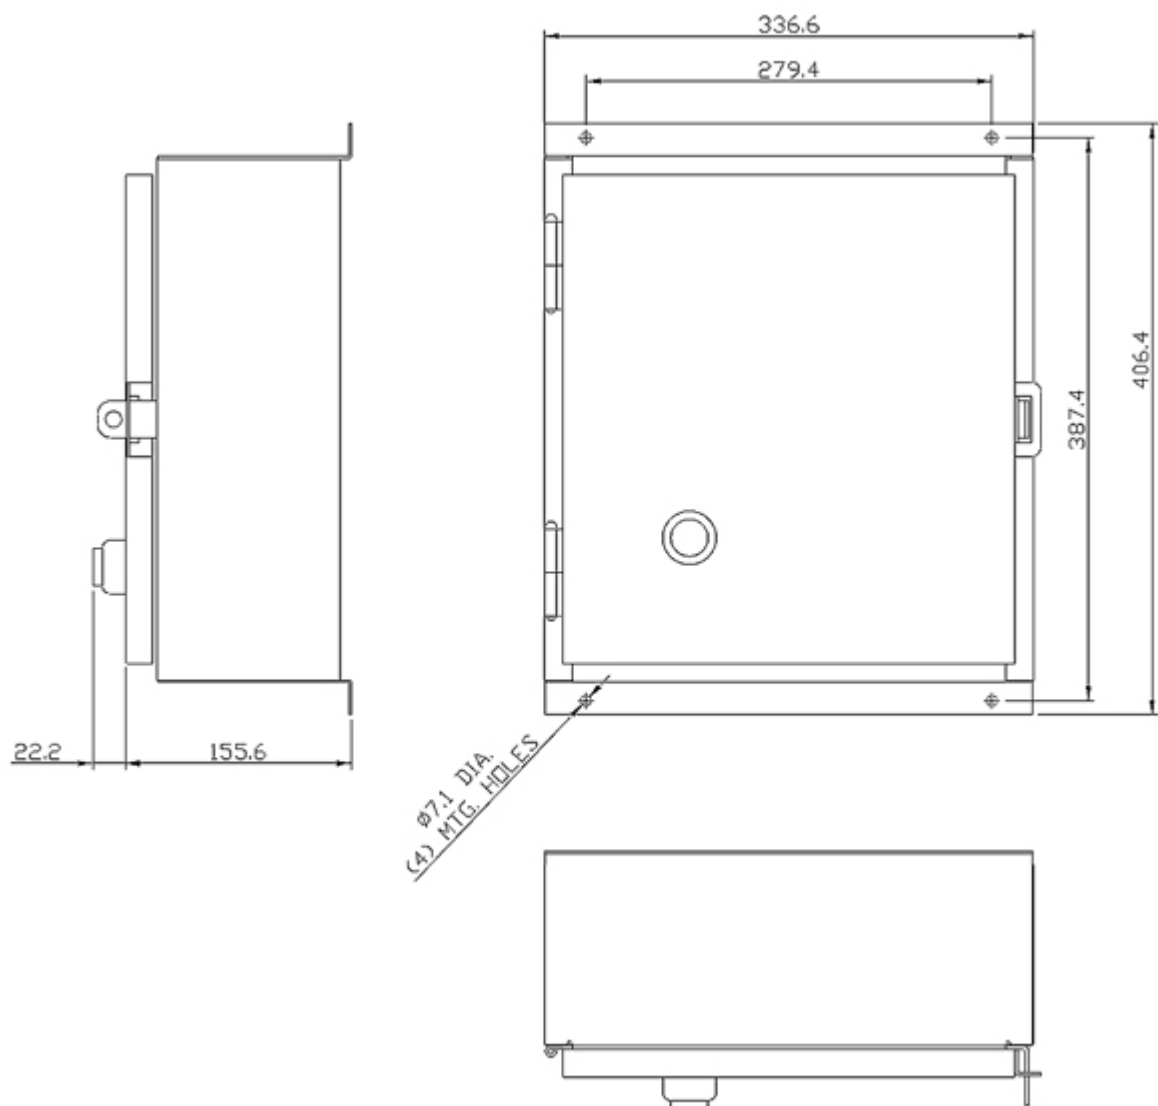

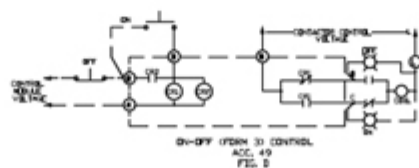

- A. WHEN CONTACTOR & LINE VOLTAGE ARE THE SAME, THE CONTACTOR CONTACT VOLTAGE CAN BE DERIVED FROM THE LINE VOLTAGE OF THE CONTACTOR SWITCH.
- B. MAIN CONTACTS ARE SHOWN IN OPEN POSITION WITH THE LINE DISCONNECTED FROM THE CONTACTOR HOLDING (DISCONNECT SHIPPER WITH CONTACTS CLOSED).
- C. LINE & LOAD TERMINALS ARE REVERSIBLE.
- D. CONTACTS ARE SINGLE THROW, DOUBLE BREAK, WITH PERMANENTLY ENERGIZED SINGLE COIL OPERATOR MECHANICALLY HELD IN BOTH OPEN & CLOSED POSITIONS.
- E. CUSTOMER CONNECTIONS TO LINE & LOAD WILL ACCORD TO THE WIRING DIAGRAM. MAX. SINGLE LINE PULS. CONNECTION TO 10 IN. 1b.
- F. CUSTOMER CONNECTIONS TO ELECTRONIC MODULE (ACC. TO THE WIRING DIAGRAM) SHALL BE MADE TO THE COVER VOLTAGE. TONGUE CONTACT TO 10 TO 20 IN. 1b.
- G. CUSTOM. MODULE VOLTAGE SUPPLIED BY CUSTOMER.

Subject to change without notice
© Copyright Siemens