




Part Number : [1719820142](#)
Product Description : Nano-Pitch I/O Connector, Right-Angle, Surface Mount, without Cap, 42 Circuits
Series Number : 171982
Status : Active
Product Category : High-Speed I/O Connectors

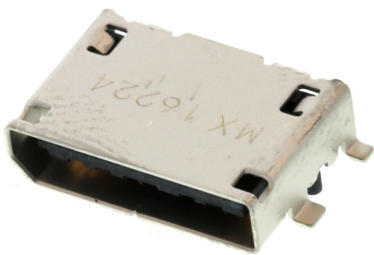

Documents & Resources

Drawings

- [Drawing 1719820142_sd.pdf](#)
- [Packaging Design Drawing PK-171982-9000-001.pdf](#)
- [Packaging Design Drawing PK-173307-0001-001.pdf](#)

3D Models and Design Files

- [3D Model 1719820142_stp.zip](#)
- [Electrical Model Document EE-171982-0010-001.pdf](#)
- [S-Parameter Model SP-171982-0010-001.zip](#)
- [Symbol Footprint Data SYM-171982-0142-001.zip](#)

Specifications

- [Application Specification AS-173162-0001-001.pdf](#)
- [Application Specification AS-173162-0002-001.pdf](#)
- [Product Specification PS-173162-0001-001.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant per EU 2015/863

[Multiple Part Product Compliance Statements](#)
- Eu RoHS

- REACH SVHC

- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C

- IPC 1752A Class D

- Molex Product Compliance Declaration

- IEC-62474

- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	High-Speed I/O Connectors
Series	171982
Description	Nano-Pitch I/O Connector, Right-Angle, Surface Mount, without Cap, 42 Circuits
Application	Wire-to-Board
Component Type	Receptacle
Product Family	Nano-Pitch I/O Interconnect System
Product Name	Nano-Pitch I/O
Type	Internal
UPC	889056188364

Agency

UL	E29179
----	--------

Electrical

Current - Maximum per Contact	0.5A
Data Rate	16.0 Gbps
Grounding to Panel	None
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

Physical

Circuits (Loaded)	42
Circuits (maximum)	42
Color - Resin	Black
Durability (mating cycles max)	50
Gender	Receptacle
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	1.070/g
Number of Rows	2
Orientation	Right Angle
Packaging Type	Embossed Tape on Reel
Panel Mount	No
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.57mm
Pitch - Mating Interface	0.50mm
Pitch - Termination Interface	0.50mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	1
Temperature Range - Operating	-40° to +80°C
Termination Interface Style	Surface Mount

Solder Process Data

Lead-Free Process Capability	N/A
------------------------------	-----