




Connectors 160/163

160 BU/12 natural

Socket, 12 pole, natural, Voltage Rating: 400 V, Cross-Section: 2.5 mm²

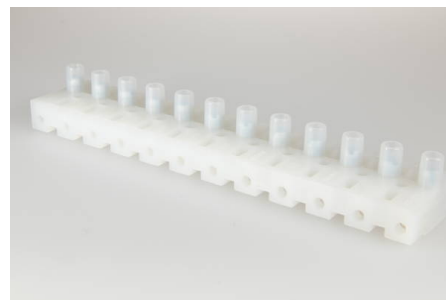

Order Info

Reference Number (ref. no.)	151472
Applications	Lighting, Installation, Transformers, Electronics
PU	50
EAN	4028012101214

Type

Type	Socket
Number of poles	12 pole
Clamping Units per Pole	1
Colour	natural
Cross-Section	2.5 mm ²
Connection Type	Screw

Technical Data

Voltage Rating	400 V
Current Rating	16 A
Insulating Material	PA 6
Contact Material	Brass
Core Cross-Section min.	0.5 mm ²
Core Cross-Section max.	4.0 mm ²
Impulse Voltage Rating	4.0 kV
Flammability Rating	V-2
max. Ambient Temperature Operation	70 °C
Type of Conductor Solid	yes
Type of Conductor Flexible	yes
Type of Conductor Stranded	yes
Stripping Length	6.5-7.0 mm
Assembly Contact Screw	0.6x3.5 / ⌀ 0.5 Nm
Approbation EN61984	160_163_EN61984_20051026_20130315_VDE_40015824_web.pdf
Approbation UL	160_163_AC164_AC166_20011003_20170727_UL_E220480_Sec.1-(
Approbation CSA	AC_160-163-166_166G_20080321_CSA_1997949_Certificate_web.p