




TE Internal #: 3-1744525-9

PCB Mount Header, Right Angle, Wire-to-Board, 9 Position, 3.96 mm [.156 in] Centerline, Partially Shrouded, Tin, Through Hole - Solder, Power, Natural

[View on TE.com >](#)

Connectors > PCB Connectors > PCB Headers & Receptacles

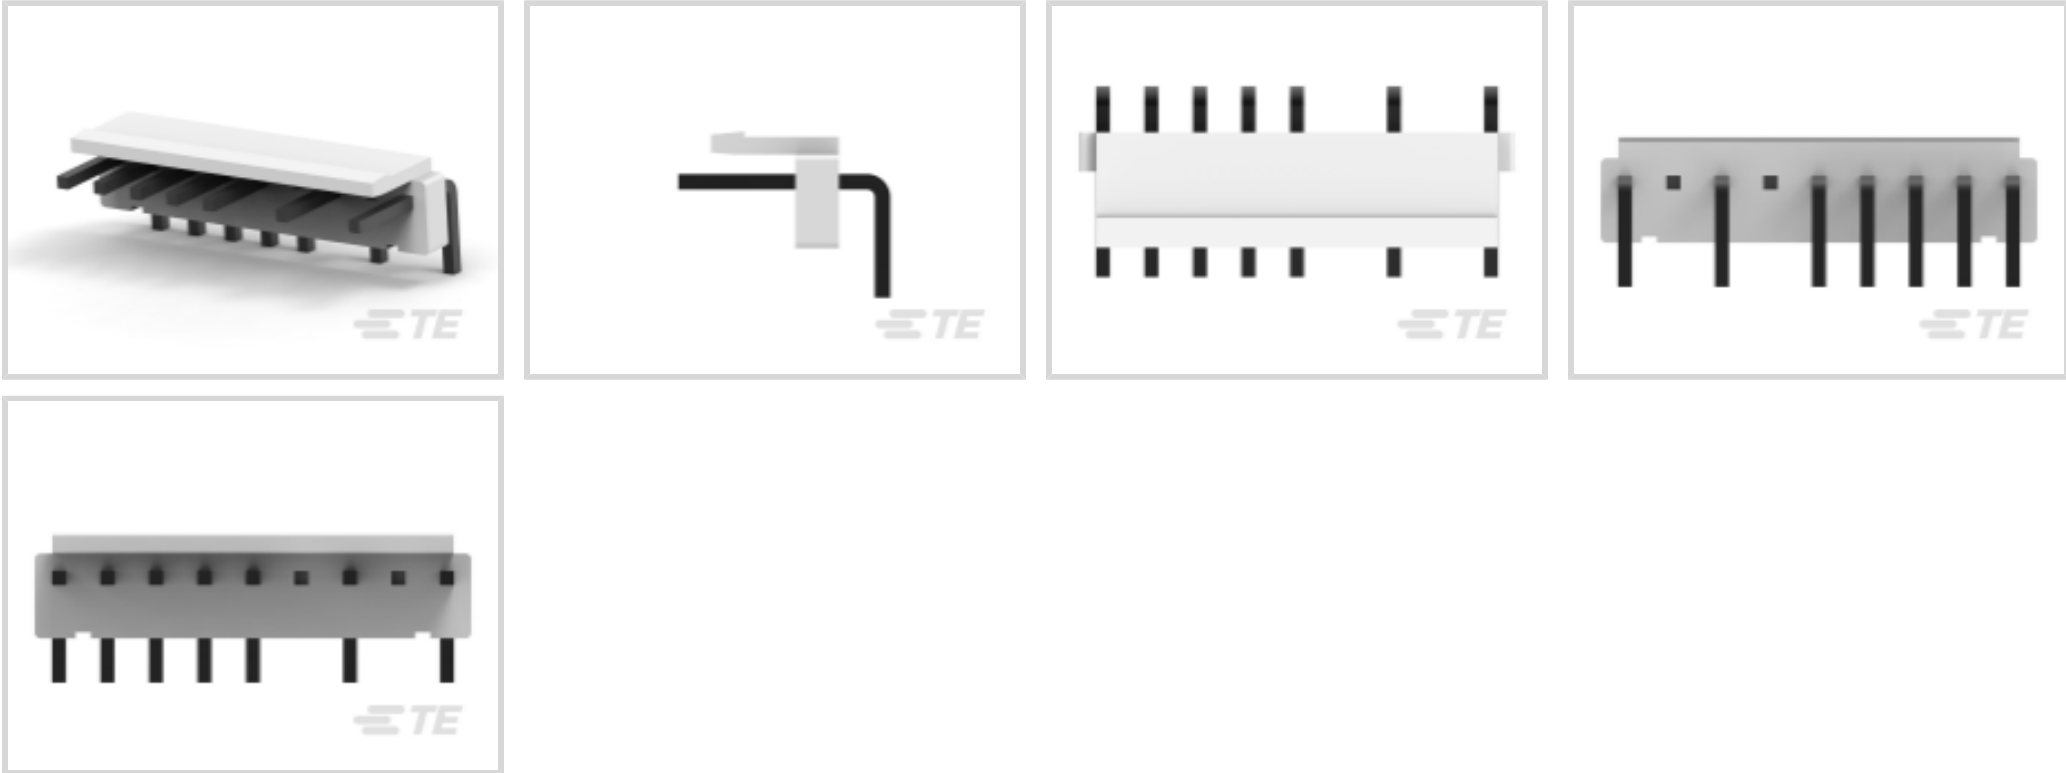

Connector System: **Wire-to-Board**

Number of Positions: **9**

Number of Rows: **1**

Centerline (Pitch): **3.96 mm [.156 in]**

PCB Mount Orientation: **Right Angle**

Features

Product Type Features

Connector Shape	Rectangular
Connector System	Wire-to-Board
Header Type	Partially Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header

Configuration Features

Number of Power Positions	9
Number of Loaded Positions	7
Number of Positions	9
Number of Rows	1
PCB Mount Orientation	Right Angle

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------



Body Features

Primary Product Color	Natural
-----------------------	---------

Contact Features

Contact Mating Area Length	8.6 mm[.339 in]
Contact Size	1.14mm
PCB Contact Termination Area Plating Material Thickness	2 μm[80 μin]
Contact Layout	Inline
Contact Mating Area Plating Material Thickness	2 μm[80 μin]
Contact Shape & Form	Square
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Brass
Contact Mating Area Plating Material	Tin
Contact Type	Tab
Contact Current Rating (Max)	8 A

Termination Features

Square Termination Post & Tail Dimension	1.14 mm[.045 in]
Termination Post & Tail Length	3.6 mm[.141 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Mating Retention	With
Mating Retention Type	Locking Tab
Connector Mounting Type	Board Mount
Mating Alignment	Without
PCB Mount Alignment	Without
PCB Mount Retention	Without

Housing Features

Housing Material	Nylon
Centerline (Pitch)	3.96 mm[.156 in]

Dimensions

Connector Length	35.64 mm[1.4 in]
Connector Height	8.2 mm[.323 in]
Connector Width	9.4 mm[.37 in]



PCB Thickness (Recommended)	1.6 mm[.063 in]
-----------------------------	-----------------

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Operation/Application

Shielded	No
Circuit Application	Power

Industry Standards

UL Rating	Recognized
Glow Wire Rating	GWT 750°C (Without Flame)
Compatible With Agency/Standards Products	UL
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	500
Packaging Method	Bag

Other

Position Locations Omitted	6, 8
Number of Blocked Positions	2

Product Compliance

For compliance documentation, visit the product page on TE.com>











EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2019 (197) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 <p>TE Part # 1744525-3 EP 03P RA-HDR ASY NO 2 PIN</p>	 <p>TE Part # 1744428-6 3.96 EP HDR ASSY 6P R/A, GW</p>	 <p>TE Part # 1-1744428-0 3.96 EP HDR ASSY 10P R/A, GW</p>	 <p>TE Part # 1-1744428-2 3.96 EP HDR ASSY 12P R/A, GW</p>
 <p>TE Part # 1-1744524-8 08P EP HDR NO 2,4 PIN V0 GWT</p>	 <p>TE Part # 1-1744524-9 09P EP HDR NO 2,4,6,8 PIN V0 GWT</p>	 <p>TE Part # 1744428-9 3.96 EP HDR ASSY 9P R/A, GW</p>	 <p>TE Part # 1744524-8 08P EP HDR NO 3,6 PIN V0 GWT</p>
 <p>TE Part # 1744525-5 EP RA 05P HEADER ASY NO 3 PIN</p>	 <p>TE Part # 1744525-9 3.96 EP HDR ASSY 9P R/A, NO 6,8 PINS</p>		

Customers Also Bought



Documents

Product Drawings

3.96 EP HDR ASSY 9P R/A, NO 6,8 PINS

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-1744525-9_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-1744525-9_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-1744525-9_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

Japanese

Application Specification

English

Agency Approvals

VDE Certificate

English