

4

3

2

1

THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
© COPYRIGHT	-	BY TYCO ELECTRONICS CORPORATION.	ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		1	-	3/2/07	SS	CR


MATERIALS:
HOUSING: PA66, UL94V-0, BLACK.
SCREWS; M2.5, STEEL, ZINC CHROMATE.
CAGE: BRASS, NICKEL PLATE.
CLAMP: PHOS BRONZE, NICKEL PLATE.

MECHANICAL:
TIGHTENING TORQUE: 3.5 IN-LB MAX.

ELECTRICAL:
CURRENT: 15A
VOLTAGE: 300V
WITHSTAND VOLTAGE: AC1500V/ 1MIN
INSULATION RESISTANCE: 5000Mohm/1000V
WIRE RANGE: 12-28 AWG

ENVIRONMENTAL:
OPERATING TEMP.: -40° TO +105°C
MAX SOLDERING: +250°C, 5 SECONDS

 MARKED WITH WHITE PERMANENT INK.

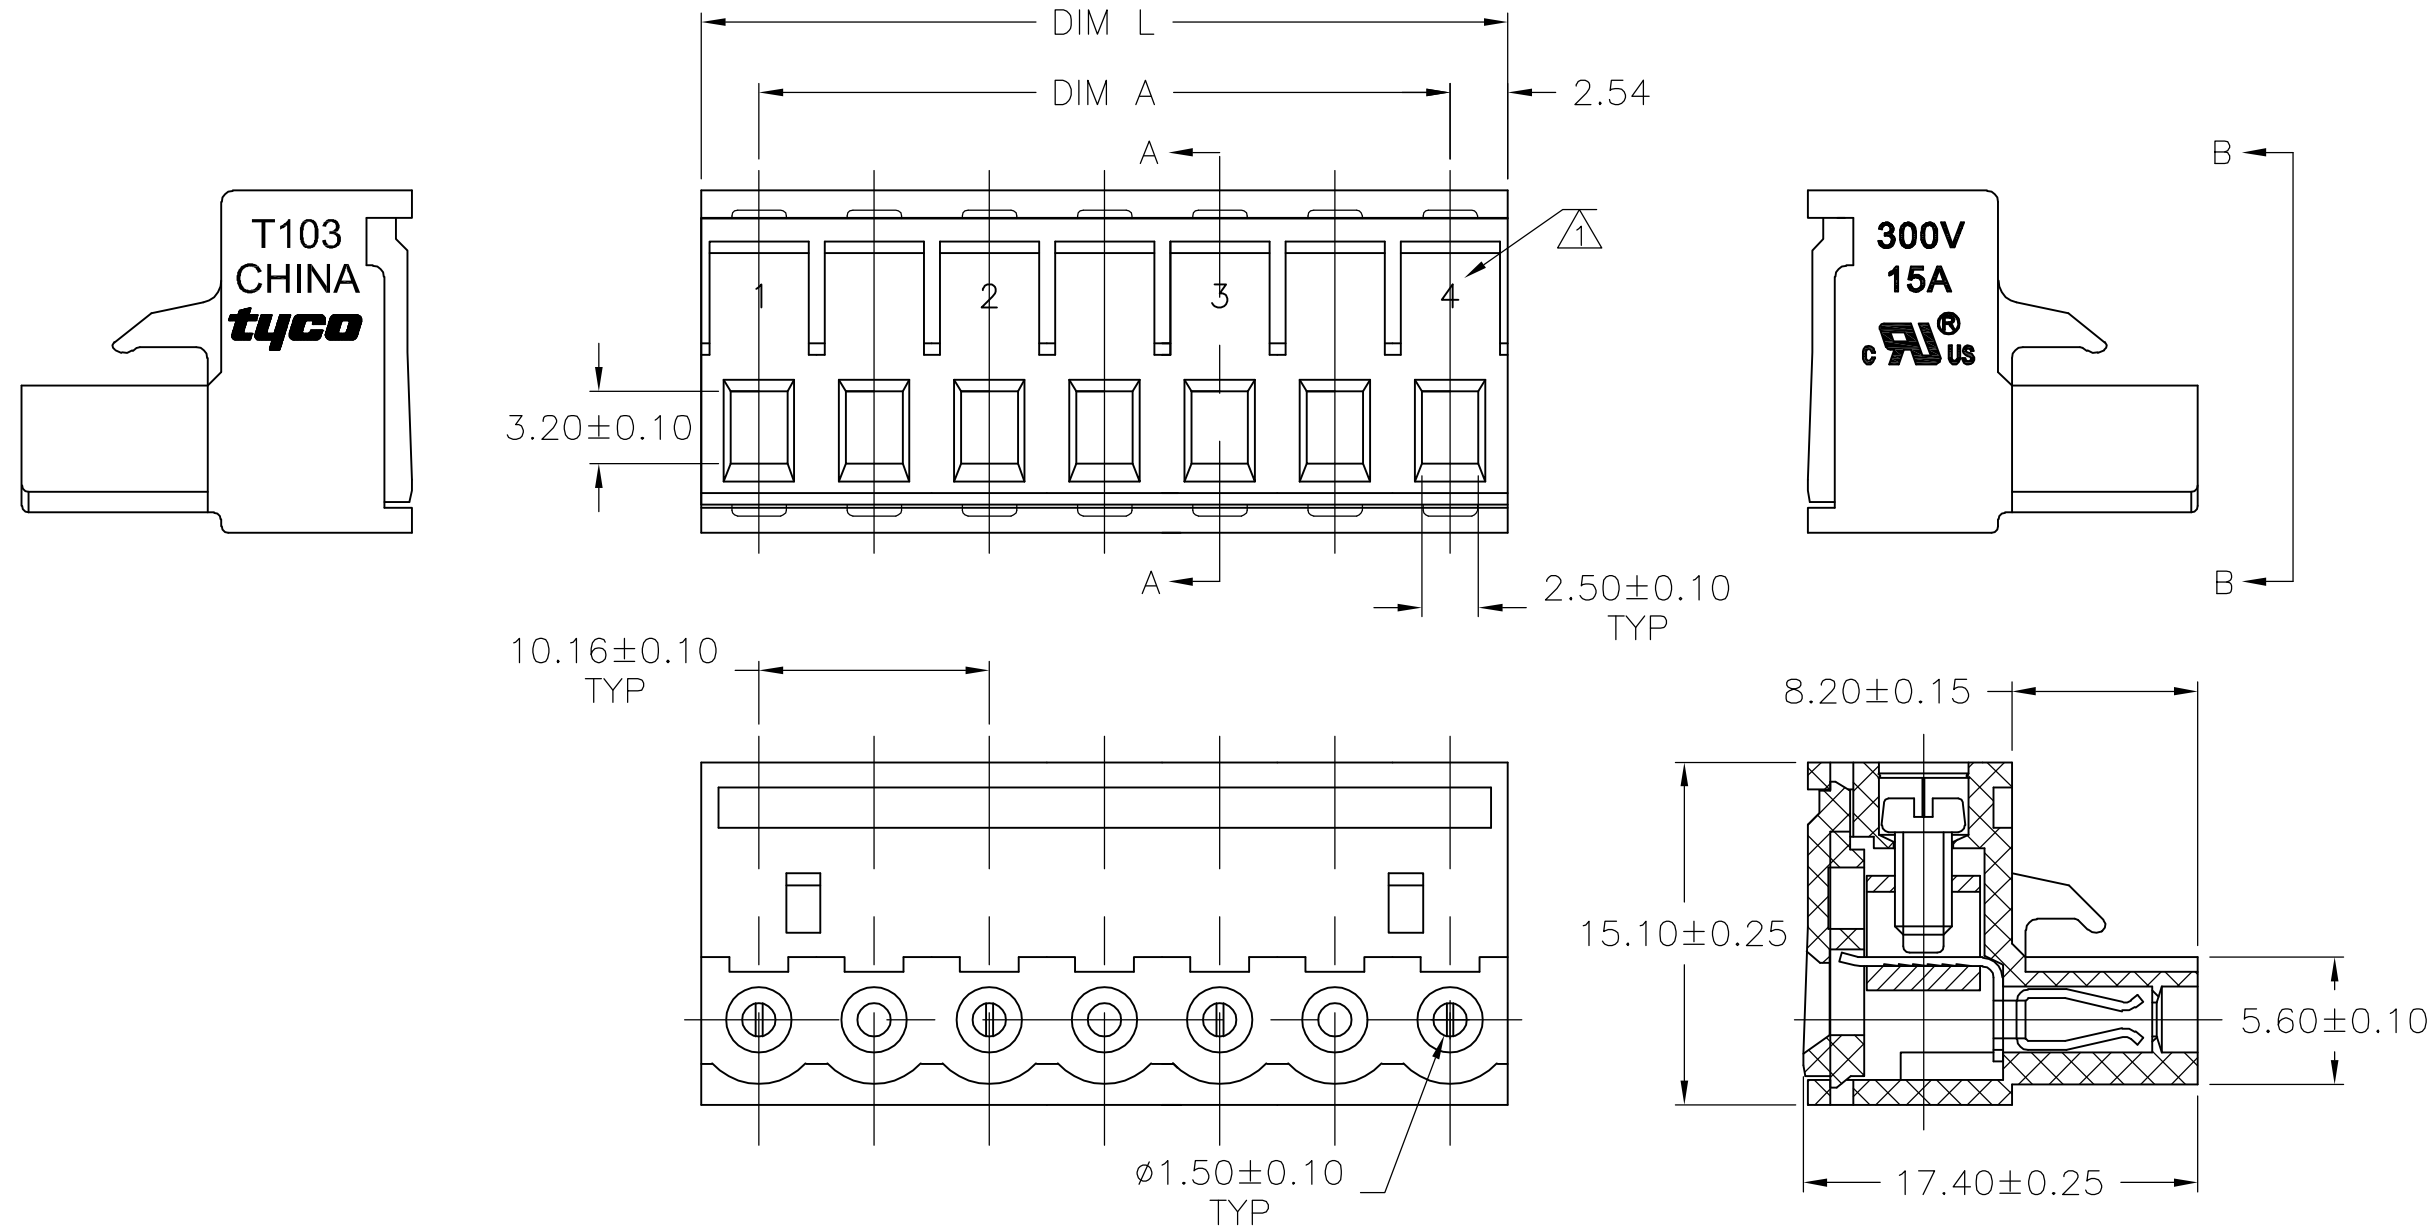


VIEW B-B

SECTION A-A

THIS PRINT IS
PRELIMINARY
PRIOR TO CUSTOMER ORDER
CONTACT PRODUCT ENGINEERING
BEFORE USING THIS PRINT

SEE FIGURE	35.56±0.30	30.48±0.30	4	1-1776988-4
NOTES	DIM L	DIM A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL CHK C RICHARD APVD C RICHARD	02MAR2007 3/2/07 3/2/07	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608		
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME				
	0 PLC ± -	PRODUCT SPEC				
	1 PLC ± -	—				
	2 PLC ± -	APPLICATION SPEC				
	3 PLC ± -	—				
4 PLC ± -	ANGLES ± 1°	SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL	FINISH	WEIGHT	A2	00779	C-1776988	—
—		CUSTOMER DRAWING		SCALE	NTS	SHEET 1 OF 1
						REV 1