

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20






COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	01APR2015	DW	CW
	B	ECR-15-014907	14OCT2015	DL	CW
	BI	ECR-19-012251	04SEP2019	WQR	CW

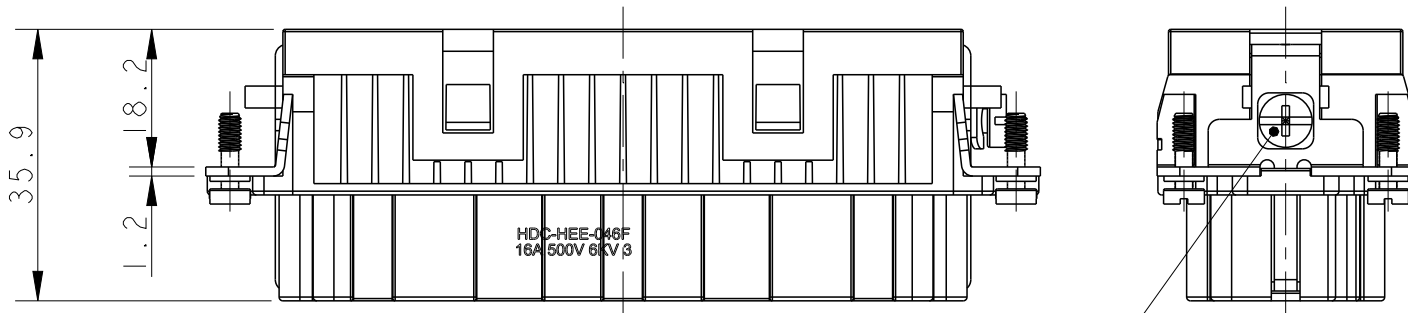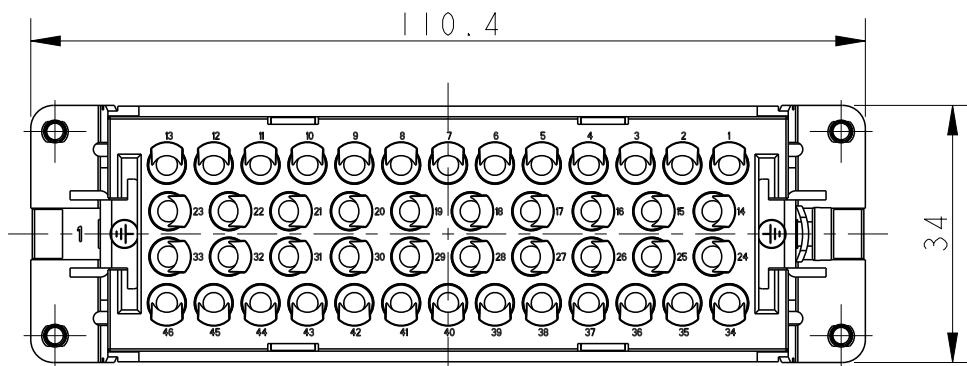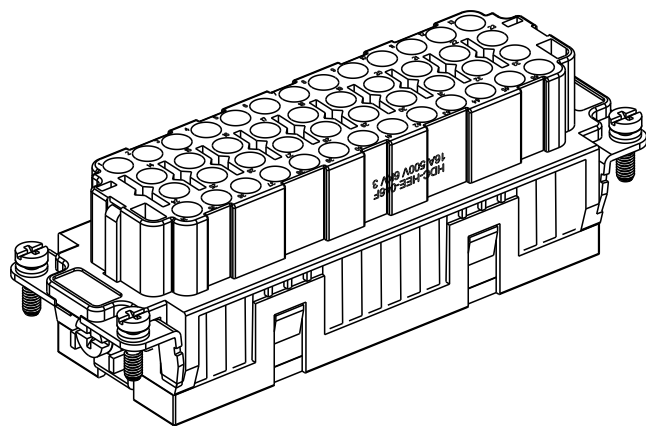


4X M3 THREAD, RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3 螺丝, 推荐拧紧力矩0.5N.m

M4 THREAD
RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4 螺丝, 推荐拧紧力矩1.2N.m

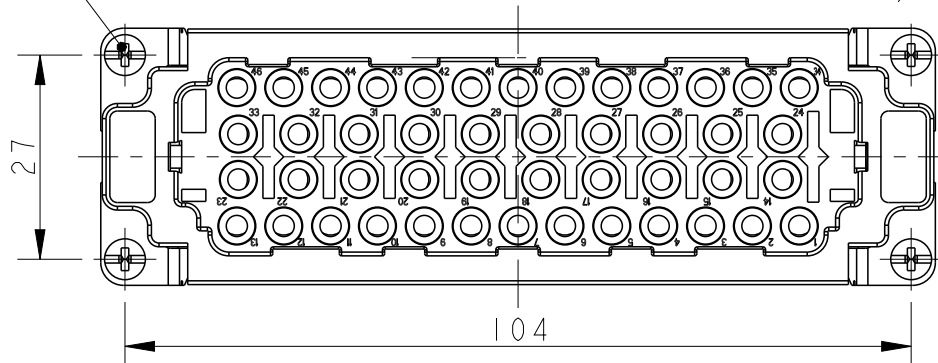

PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS
不使用防护外壳时芯件的安装开孔图

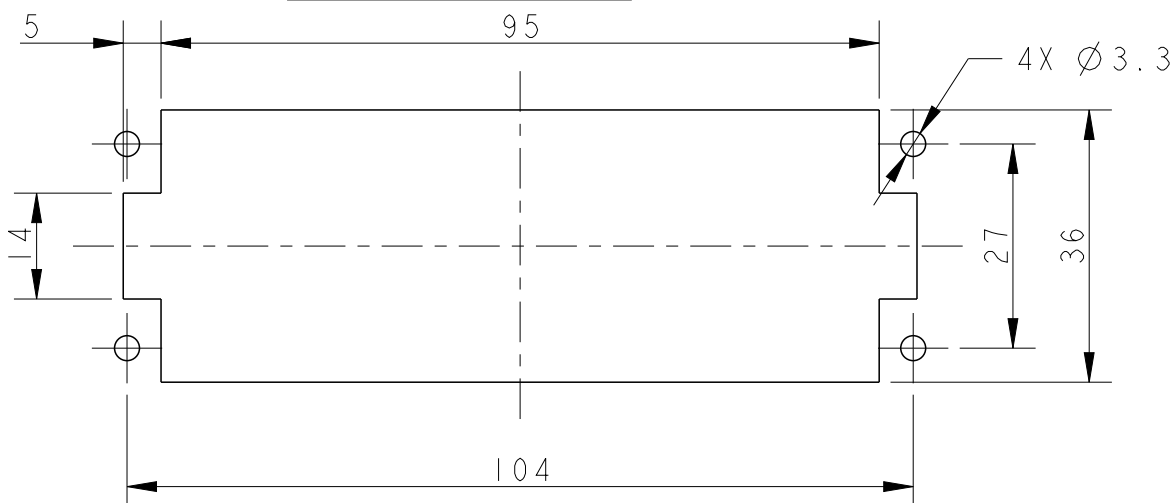

NOTES:

- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 500V
RATED CURRENT: 16A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-4 mm² (26-12 AWG)
CONTACT TYPE: CRIMP CONTACT
- CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20300X20XX000)

注释:

- 技术参数:
绝缘材料: PC
额定电压: 500V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 6KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-4 mm² (26-12 AWG)
接线类型: 冷压接
- 端子需要单独订购.
(订货号参考图面: T20300X20XX000)

T2059462201-000	HEE-046-F	HEE-046 FEMALE INSERT, NO TE LOGO HEE-046母插, 无TE LOGO
PART NUMBER 料号	PART DESCRIPTION 描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 01APR2015 David Wang			
		CHK 01APR2015 Chris Wang			
		APVD 01APR2015 Xiang Xu	NAME HEE-046 FEMALE INSERT, NO TE LOGO		
		PRODUCT SPEC 108-106137			
		APPLICATION SPEC 114-106137			
		WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO T2059462201000
		Customer Drawing	SCALE 1:1	SHEET 1	OF 1
				REV BI	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[T2059462201-000](#)